

Model : ATZ VC-SDI-HDMI
Description : SD/HD/3G SDI TO HDMI CONVERTER



1.0 Introduction

The SDI to HDMI converter allows SD-SDI, HD-SDI and 3G-SDI signals to be shown on HDMI/SDI displays while ensuring high bit rates of 2.970 Gbit/s to give you fast signal transmission without any loss. For professionals this means that it is now easier to distribute and extend your 3G SDI signal while giving you the ability to display your work on HDMI displays thanks to the built in HDMI converter.

2.0 Features

- 1) Operation at 2.970Gbit/s, 2.970/1.001Gbit/s, 1.485Gbit/s, 1.485/1.001Gbit/s and 270Mbits/s.
- 2) Supports SMPTE 425M (Level A and Level B), SMPTE 424M, SMPTE 292M, SMPTE 259M-C.
- 3) Equalized and re-clocked loop output• Integrated audio de-embedder for a maximum of 8 channel, 48 kHz audio.
- 4) Auto video mode detection (3G/SD/HD)
- 5) Conversion from SMPTE 425M level B to Level A 1080p 50/59.94/60 4:2:2 10-bit.
- 6) Connect with other units to extend your signal over long distances.
- 8) Supports signal transmission distances of up to 300M for SDI signals, 200M for HD signals and 100M for 3G signals

Model : ATZ VC-SDI-HDMI
Description : SD/HD/3G SDI TO HDMI CONVERTER

3.0 Packaging accessories:

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:


- (1) SDI TO HDMI CONVERTER-----1Pcs
- (2) 5V DC Power Adaptor-----1Pcs
- (3) User Manual-----1Pcs

4.0 Specifications

Input Port1	1x BNC (SDI/HD-SDI/3G-SDI)
Output Port	1x HDMI
SDI Transmission Rates	2.970 Gbit/s and 2.970/1.001 Gbit/s
In/Output Resolution	480i, 576i, 720p@50/59.94,60 1080i@50/59.94/60 1080p@23.97/24/25/29.97/30/50/59.94/60
Power Supply	DC 5V
ESD Protection Human body model	±8kV (air-gap discharge)
	±4kV (contact discharge)
Dimension	82mm x 43.5mm x 23mm
Weight	150g
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20 ~ 90% RH (Non-condensing)
Power Consumption (Max)	5W

5.0 Panel introduction

Please study the panel drawings below and become familiar with the signal input(s), output(s) and power requirements.

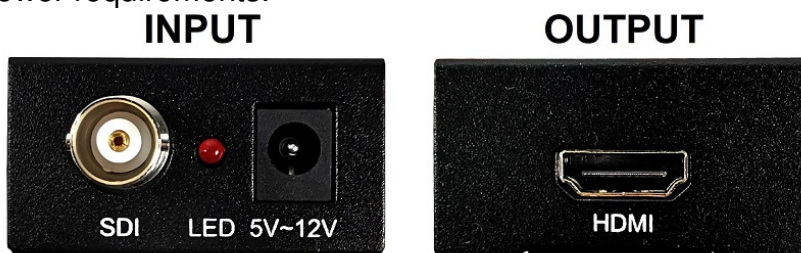

- DC 5V-----Power Input interface
- LED-----Power Input Status Indication
- SDI-----SDI Input interface
- HDMI-----HDMI Output interface

6.0 Connection and operation

- 6.01 Connect the Coaxial Cable between SDI signal source and SDI INPUT of converter.
- 6.02 Connect the HDMI Cable between converter and HDMI display.
- 6.03 Connect the power adapter between converter and outlet.
- 6.04 Open the power supply of HDMI signal source and the display. Choose corresponding input ports, then it works.

Model : ATZ VC-SDI-HDMI

Description : SD/HD/3G SDI TO HDMI CONVERTER

WARNING

- 1) Do not expose this apparatus to rain, moisture, dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus.
- 2) Do not install or place this unit a bookcase, built-in cabinet or in another confined space ensure the unit is well ventilated.
- 3) To prevent risk of electric shock or fire hazard due to overheating, do not obstruct the unit's ventilation openings with newspapers, tablecloths, curtains, and similar items.
- 4) Do not install near any heat sources such as radiators, heat registers, stoves or other apparatus (including amplifiers) that product heat.
- 5) Do not place sources of naked flames, such as lighted candles, on the unit.
- 6) Clean this apparatus only with dry cloth.
- 7) Unplug this apparatus during lightning storms or when unused for long periods of time.
- 8) Protect the power cord from being walked on or pinched particularly at plugs.
- 9) Only use attachments/accessories specified by the manufacturer.
- 10) Refer all servicing to qualified service personnel.

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.