


Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

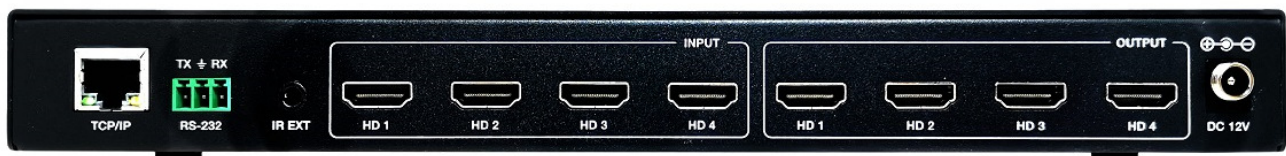

This 4K60 4:4:4 HDMI matrix switch is a multi-purpose high-speed video processing system. It can be configured for 2 different output modes. It can perform as a 4x4 seamless matrix switcher, as a 2x2, 4x1 or 1x4 etc video wall solution. It also features a web browser interface module for control and configuration of the matrix when used stand-alone or with a third party control system. Control options include front-panel push buttons, IR remote control, RS-232 interface and TCP/IP.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

Features:

- Compliant HDMI 2.0b
- Compliant HDCP 2.2 and HDCP 1.4
- Features 2 operational modes:
 - 4x4 Matrix (seamless switch)
 - Video wall (2x2, 4x1 or 1x4 etc configuration)
- Seamless video switching
- Video inputs support all industry standard video resolutions including VGA-WUXGA (up to 1920x1200 @60Hz) and 480i-4K (3840 x 2160 @60Hz 4:4:4, 4096 x 2160 @60Hz 4:4:4)
- HDMI outputs support upscale or downscale to any resolution, up to 4096 x 2160@60Hz4:4:4
- Support LPCM, DD, DD+, DTS, Dolby TrueHD, DTS HD-master pass-through
- Advanced EDID management
- Web interface module for control and configuration of Matrix
- Control via front panel, IR, RS-232 and TCP/IP
- 3rd Party drivers available for all major home control brands

Specifications:

Technical	
HDMI Compliance	HDMI 2.0b
HDCP Compliance	HDCP 2.2/1.4
Video Bandwidth	594MHz/18Gbps
Video Resolution	Input: VGA-WUXGA (up to 1920x1200@60Hz), 480i-4K (3840x2160@60Hz 4:4:4, 4096x2160@60Hz 4:4:4) Output: 4096x2160p60, 4096x2160p50, 3840x2160p60, 3840x2160p50, 3840x2160p30, 1920x1080p60, 1920x1080p50, 1920x1080i60, 1920x1080i50, 1920x1200p60rb, 1360x768p60, 1280x800p60, 1280x720p60, 1280x720p50, 1024x768p60, auto
Color Space	RGB, YCbCr 4:4:4/4:2:2, YUV 4:2:0
Color Depth	8/10/12-bit
IR Level	12Vp-p
IR Frequency	38KHz
HDMI Audio Formats	LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio
Connection	
Inputs	4x HDMI Type A [19-pin female]

pg. 2

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice.
© Copyright ATZ


Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

Outputs	4x HDMI Type A [19-pin female]
Control	1x RS-232 [3pin-3.81mm phoenix connector] 1x TCP/IP [RJ45] 1x IR EXT [3.5mm Stereo Mini-jack]
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	270mm (W) × 166mm (D) × 30mm (H)
Weight	1165g
Power Supply	Input: AC 100 - 240V 50/60Hz Output: DC 12V/2.5A (US/EU standard, CE/FCC/UL certified)
Power Consumption	19.56W (Max)
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)

Operation Controls and Functions

Front Panel:

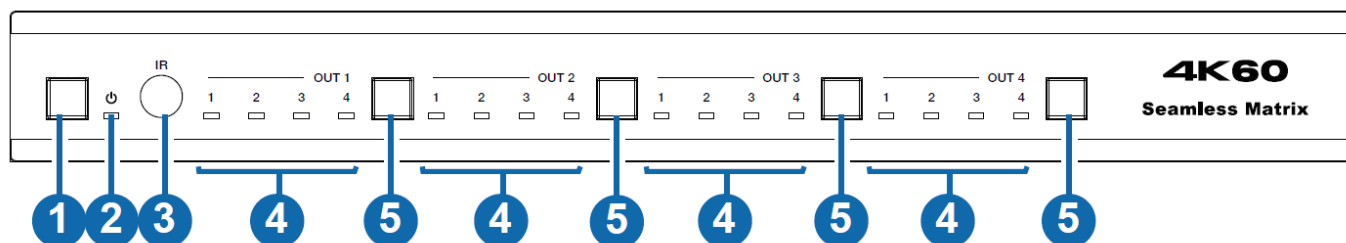


No.	Name	Function Description
1	Power button	<ul style="list-style-type: none"> Short press this button to power on the device. Press this button for 1 seconds to enter the standby mode.
2	Power LED	The LED will illuminate in green when the product is working normally, and red when the product is on standby.
3	IR Window	IR receiver window, it only receives the IR remote signal from this product.
4	Signal source LED	Signal source indicator for the OUT 1 - OUT 4 port.
5	Input source switching button	Input source switching button for the OUT 1- OUT 4 port.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

Rear Panel:

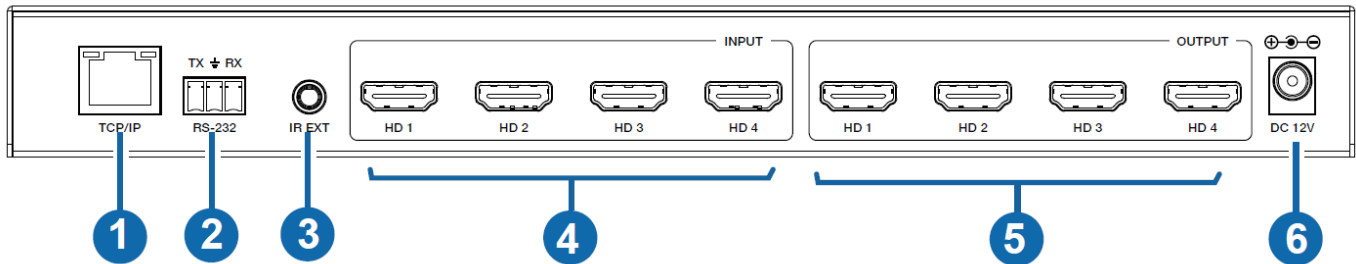


No.	Name	Function Description
1	TCP/IP	The link port for TCP/IP control, connected to an active Ethernetlink with an RJ45 cable to control the Matrix via Web.
2	RS-232	RS-232 serial command control port, connected to a PC or control system to control the Matrix.
3	IR EXT	If the IR receiver window of the unit is blocked or the unit is installed in a closed area out of infrared line of sight, the IR receiver cable can be inserted to the "IR EXT" port to receive the IR remote signal.
4	HDMI INPUT	HDMI signal input port, connected to signal source device.
5	HDMI OUTPUT	HDMI signal output port, connected to HDMI display device.
6	DC 12V	DC 12V/2.5A power input port.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

IR Remote:

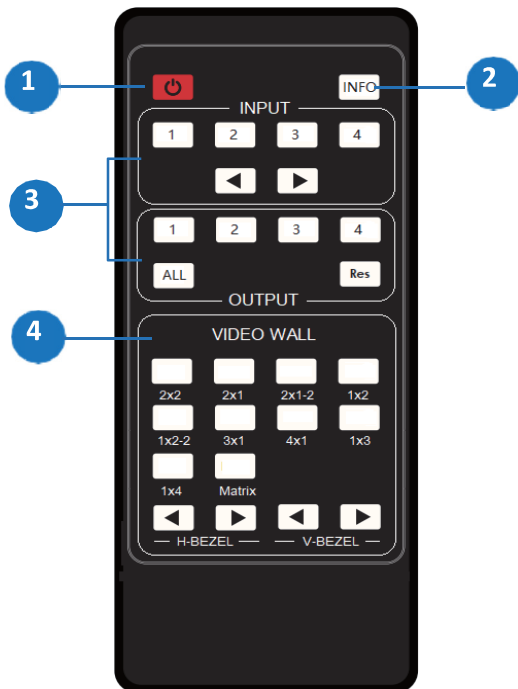

① **Power on or Standby:** Power on the Matrix or set it to standby mode.

② **INFO:** Press this button to display the serial port baud rate and IP address in the upper right corner of the screen. (The information will disappear after 5 seconds.)

③ INPUT/OUTPUT

INPUT 1/2/3/4: Select the signal input channel.

◀ ▶ : Select the last or next signal input channel.

OUTPUT 1/2/3/4: Select the signal output channel.

ALL: Select all output channels simultaneously. For example, when you press the “ALL” button and then press INPUT “1” button, at this time the input “1” source will be output to all display devices.

Res: Press this button to switch output channel resolution.

Matrix mode: Press **OUTPUT 1/2/3/4** or **ALL**, then press **Res** to switch the output resolution circularly.

Video wall mode: Press **Res** directly to switch the output resolution for four output channels simultaneously.

Operation Instruction: You need to press the OUTPUT button firstly and then press the INPUT button to select the corresponding input source. For example, Press OUTPUT-X (X means output button from 1 to 4, including “ALL” button), then press INPUT-Y (Y means input button from 1 to 4).

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

④ VIDEO WALL:

Video wall mode selection:


Press the video wall mode button directly to enter corresponding mode.

Source selection for the video wall group:

Press **OUTPUT 1/2/3/4** or ◀/▶ to select the video wall group firstly, then press **INPUT 1/2/3/4** or ◀/▶ to select the input source.

Bezel Adjustment: Press ◀/▶ of H-BEZEL / V-BEZEL to adjust the bezel.

IR Pin Definition:

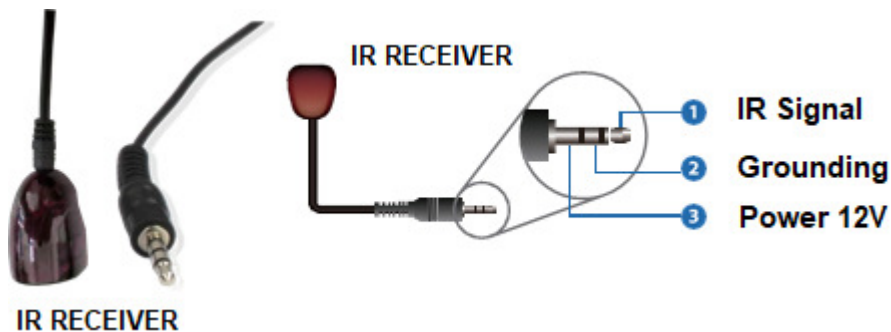

Note: When the angle between the IR receiver and the remote control is $\pm 45^\circ$, the transmission distance is 0-5 meters; when the angle between the IR receiver and the remote control is $\pm 90^\circ$, the transmission distance is 0-8 meters.

Model : ATZ HDMI-V2-44S-TW


Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

EDID Management:

This Matrix has 12 factory defined EDID settings, 2 user-defined EDID modes and 4 copy EDID modes. You can select defined EDID mode or copy EDID mode to input port through RS-232 control or Web GUI.

RS-232 control operation: Connect the Matrix to PC with a serial cable, then open a Serial Command tool on PC to send ASCII command “s edid in x from z!” to set EDID. For details, please refer to “EDID Setting” in the ASCII command list of “11. RS-232 Control Command”.

Web GUI Operation: Please check the EDID management in the “Input page” of “10. Web GUI User Guide”.

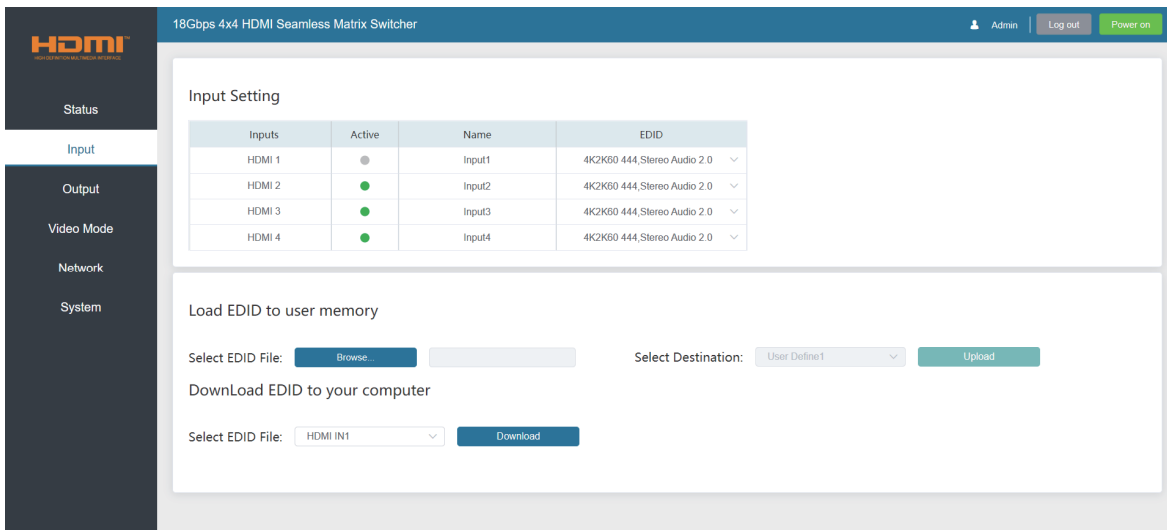

Inputs	Active	Name	EDID
HDMI 1	<input type="radio"/>	Input1	4K2K60 444, Stereo Audio 2.0
HDMI 2	<input checked="" type="radio"/>	Input2	4K2K60 444, Stereo Audio 2.0
HDMI 3	<input checked="" type="radio"/>	Input3	4K2K60 444, Stereo Audio 2.0
HDMI 4	<input checked="" type="radio"/>	Input4	4K2K60 444, Stereo Audio 2.0

The defined EDID setting list of the product is shown as below:

EDID Mode	EDID Description
1	4k2k60_444, stereo audio 2.0
2	4k2k60_444, dolby/dts 5.1
3	4k2k60_444, hd audio 7.1
4	4k2k30_444, stereo audio 2.0
5	4k2k30_444, dolby/dts 5.1
6	4k2k30_444, hd audio 7.1
7	1080p, stereo audio 2.0
8	1080p, dolby/dts 5.1
9	1080p, hd audio 7.1
10	1920x1200, stereo audio 2.0
11	1360x768, stereo audio 2.0
12	1024x768, stereo audio 2.0
13	user define1


Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

14	user define2
15	copy from hdmi output 1
16	copy from hdmi output 2
17	copy from hdmi output 3
18	copy from hdmi output 4

Video Wall

The matrix supports **10 categories of display modes** as below:

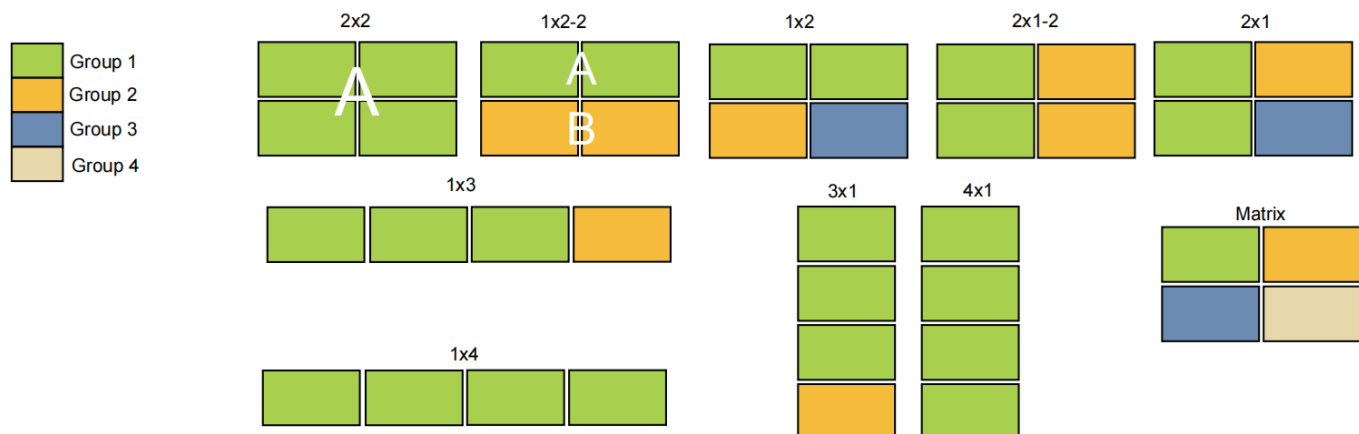

Web GUI User Guide:

The Matrix can be controlled by Web GUI. The operation method is shown as below:

Step 1: Get the current IP Address.

The default IP address is 192.168.0.100. You can get the current Matrix IP address in two ways:

The first way: You can get the IP address via remote controller. Press "INFO" button on the remote control, the IP address will show the upper right corner of the screen.

The second way: You can get the IP address via RS-232 control. Send the ASCII command "r ip addr!" through a Serial Command tool, then you'll get the feedback information as shown below:

```
ip address:192.168.0.100
```



Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL


IP:192.168.0.100 in the above figure is the current Matrix IP address (this IP address is variable, depending on what the specific machine returns).

For the details of RS-232 control, please refer to “RS-232 Control Command”.

Step 2: Connect the TCP/IP port of the Matrix to a PC with an UTP cable (as shown in the following figure), and set the IP address of the PC to be in the same network segment with the Matrix.

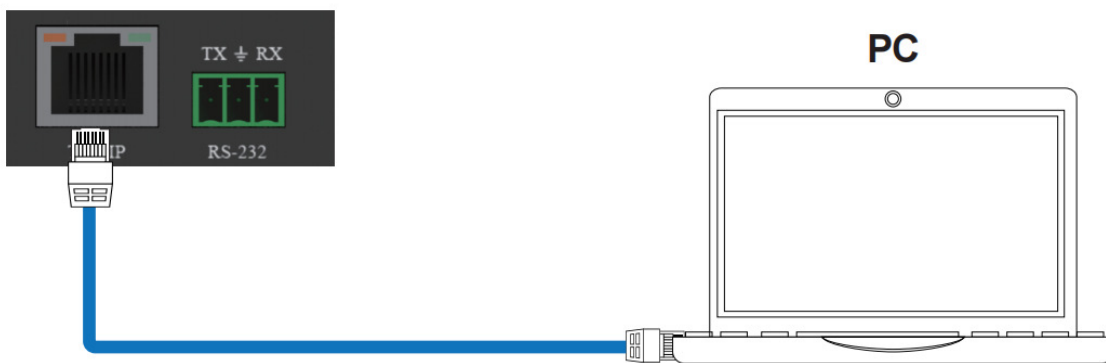

Step 3: Input the current IP address of Matrix into your browser on the PC to enter Web GUI page.



After entering the Web GUI page, there will be a Login page



Select the Language from the drop-down list to choose English or Simple Chinese. Select the Username from the drop-down list and enter the password. The default passwords are:

Username	User	Admin
Password	user	admin


After entering the password, click the “LOGIN” button and the following Status page will appear.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL


■ Status Page

The Status page provides basic information about the product model, installed firmware version and the network settings of the device.

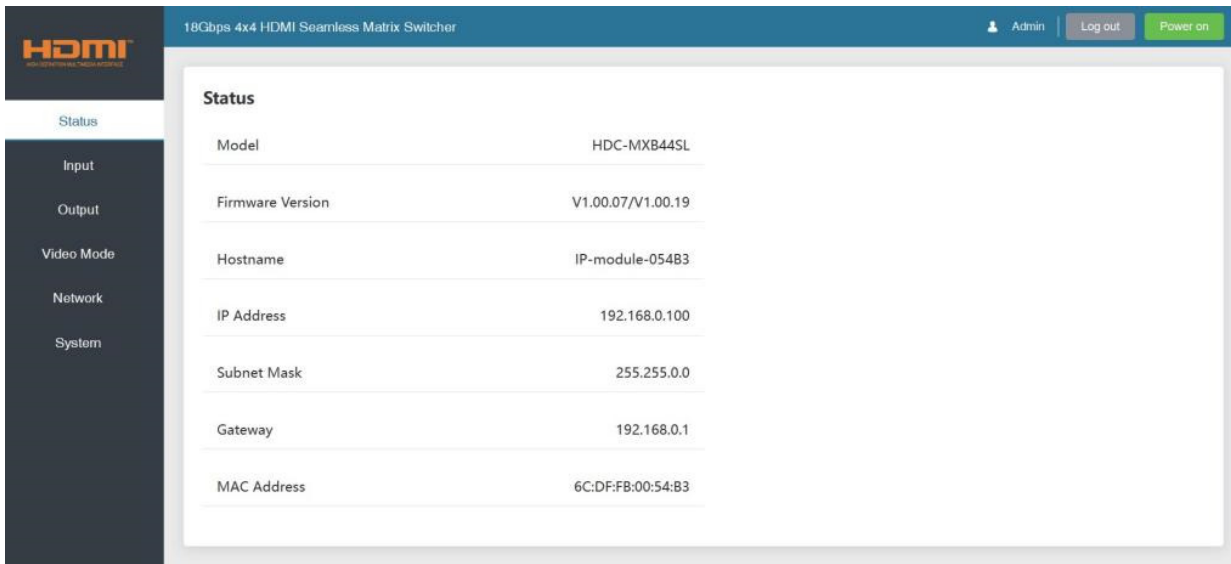

Model	HDC-MXB44SL
Firmware Version	V1.00.07/V1.00.19
Hostname	IP-module-054B3
IP Address	192.168.0.100
Subnet Mask	255.255.0.0
Gateway	192.168.0.1
MAC Address	6C:DF:FB:00:54:B3

■ Input Page

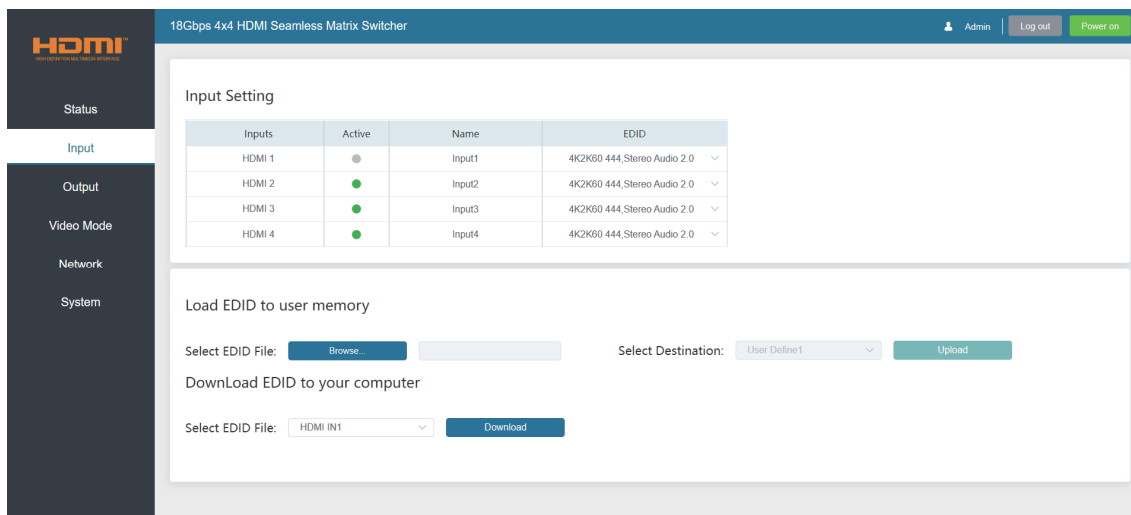

Inputs	Active	Name	EDID
HDMI 1	●	Input1	4K2K60 444,Stereo Audio 2.0
HDMI 2	●	Input2	4K2K60 444,Stereo Audio 2.0
HDMI 3	●	Input3	4K2K60 444,Stereo Audio 2.0
HDMI 4	●	Input4	4K2K60 444,Stereo Audio 2.0

Load EDID to user memory

Select EDID File: Select Destination:

DownLoad EDID to your computer

Select EDID File:

You can do the following operations on the Input page:

① **Inputs:** Input channel of the device.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

② **Active:** It indicates whether the channel is connected to a signal source. When the input port is connected to the signal, it shows green, otherwise, it shows gray.


③ **Name:** The input channel's name. You can modify it by entering the corresponding name (max length: 31 characters for English and 15 characters for Chinese) in the input box.

Chinese name is unsupported when the language is English; and when the language is Chinese, both English and Chinese name are available.


④ **EDID:** You can set the current channel's EDID. Click drop-down list to select.

⑤ **Load EDID to user memory:** Set EDID for the User.

Click the "Browse" button, then select the bin file. If you select the wrong EDID file, there will be a prompt, as shown in the following figure:

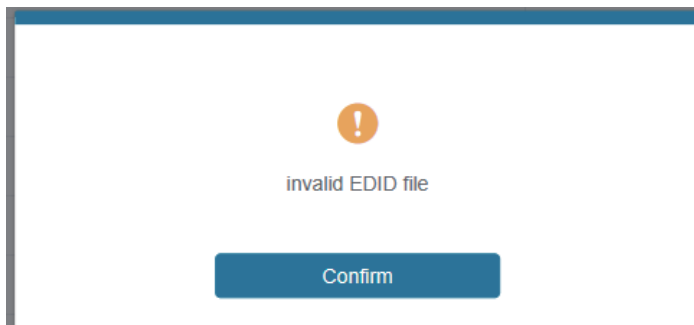

Make sure to select the correct file, then you can check the name of the selected file. Select "User 1" or "User 2", then click "Upload". After successful setting, it will prompt as follows:

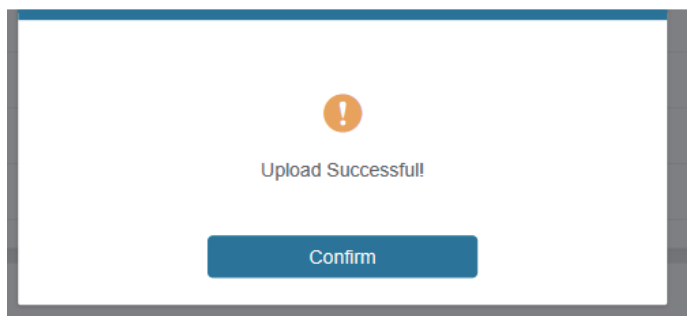


⑥ **Download EDID to your computer:**

Click the drop-down box of "Select EDID File" to select the corresponding input channel. Then click "Download" to download the corresponding EDID file.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

■ Output Page

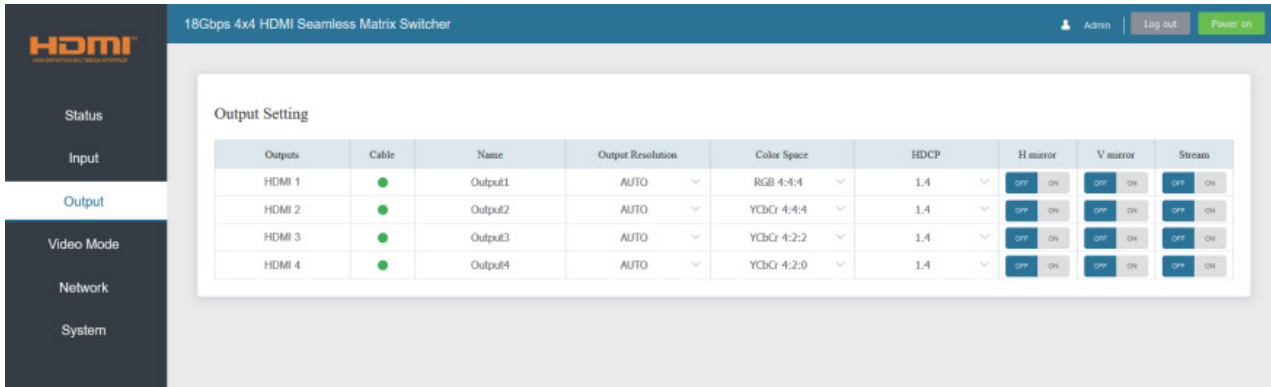

Outputs	Cable	Name	Output Resolution	Color Space	HDCP	H mirror	V mirror	Stream
HDMI 1	●	Output1	AUTO	RGB 4:4:4	1.4	OFF ON	OFF ON	OFF ON
HDMI 2	●	Output2	AUTO	YCbCr 4:4:4	1.4	OFF ON	OFF ON	OFF ON
HDMI 3	●	Output3	AUTO	YCbCr 4:2:2	1.4	OFF ON	OFF ON	OFF ON
HDMI 4	●	Output4	AUTO	YCbCr 4:2:0	1.4	OFF ON	OFF ON	OFF ON

You can do the following operations on the Output page:


- ① **Outputs:** Output channel of the device.
- ② **Cable:** It indicates the connection status of output ports. When the output port is connected to the display, it shows green, otherwise, it shows gray.
- ③ **Name:** The current output channel's name. You can modify it by entering the corresponding name (max length: 31 characters for English and 15 characters for Chinese) in the input box. Chinese name is unsupported when the language is English; and when the language is Chinese, both English and Chinese name are available.
- ④ **Output Resolution:** Set the current output resolution mode. Click the drop-down list to select other resolutions.
- ⑤ **Color Space:** Set the color space of the output signal.
- ⑥ **HDCP:** Set the HDCP version that the current output port supports.
- ⑦ **H mirror:** Turn on/off the horizontal mirroring of the output signal.
- ⑧ **V mirror:** Turn on/off the vertical mirroring of the output signal.
- ⑨ **Stream:** Turn on/off the signal output stream of the output port.

Note: User cannot set each output resolution separately in video wall mode.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

■ Video Mode Page

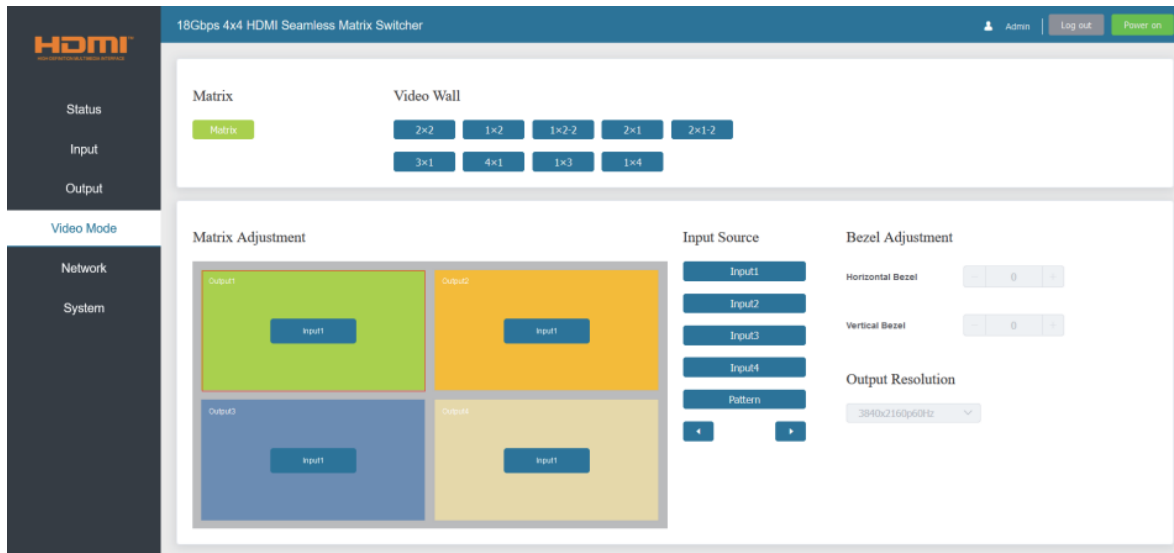


You can do the following operations on the Video page:

- ① **Matrix:** Click to select Matrix mode.
- ② **Video Wall:** Click to select any multiview display mode.
- ③ **Matrix/Video Wall Adjustment:** Display the input and output information.
- ④ **Input Source:** Two methods to select the input source:
 Method 1: Drag **Input1/2/3/4/Pattern** to any window of Matrix/Video Wall Adjustment.
 Method 2: Select any window in Matrix/Video Wall Adjustment, then click **Input1/2/3/4/Pattern** in Input Source, or click ◀/▶ to select the last or next signal source.
- ⑤ **Bezel Adjustment:** Click +/- to adjust the corresponding Horizontal/Vertical Bezel (Up to 10 levels).
- ⑥ **Output Resolution:** Set the resolution of all current output ports. Click the drop-down list to select.

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

■ Network Page

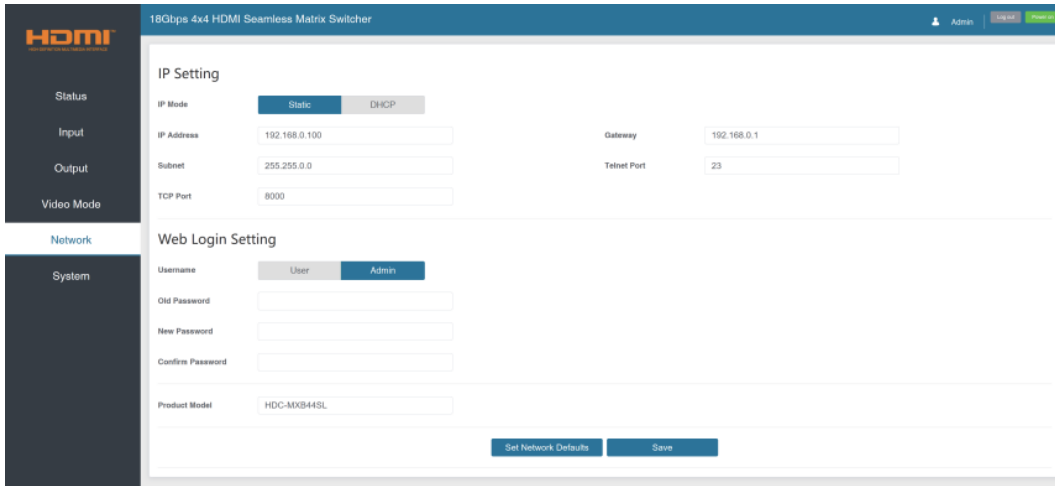

You can do the following operations on the Network page:

Modify Network Setting

Modify the IP Mode Address/Gateway/Subnet Mask/Telnet Port as required, click “Save” to save the settings, then it will come into effect.

After modification, if the Mode is “Static”, it will switch to the corresponding IP Address; if the Mode is “DHCP”, it will automatically search and switch to the IP Address assigned by the router.

IP Setting


IP Mode	<input checked="" type="radio"/> Static	<input type="radio"/> DHCP		
IP Address	<input type="text" value="192.168.0.100"/>	Gateway	<input type="text" value="192.168.0.1"/>	
Subnet	<input type="text" value="255.255.0.0"/>	Telnet Port	<input type="text" value="23"/>	
TCP Port	<input type="text" value="8000"/>			

Modify User Password

Click the “User” button, enter the correct Old Password, New Password, and Confirm Password, then click “Save”. After successful modification, there will be a prompt, as shown in the following figure:

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

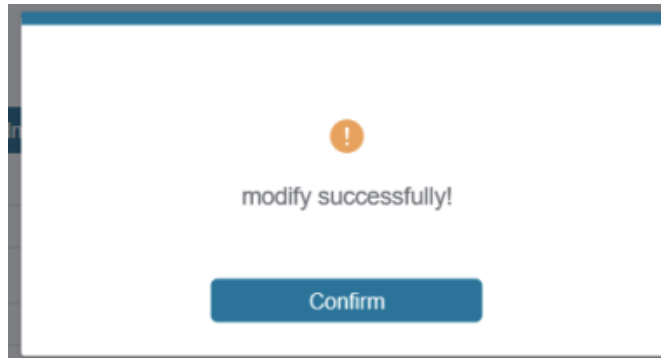


Note: Input rules for changing passwords:

- (1) The password can't be empty.
- (2) New Password can't be the same as Old Password.
- (3) New Password and Confirm Password must be the same.

Set the Default Network


Click "Set Network Defaults" button, there will be a prompt, as shown in the following figure:

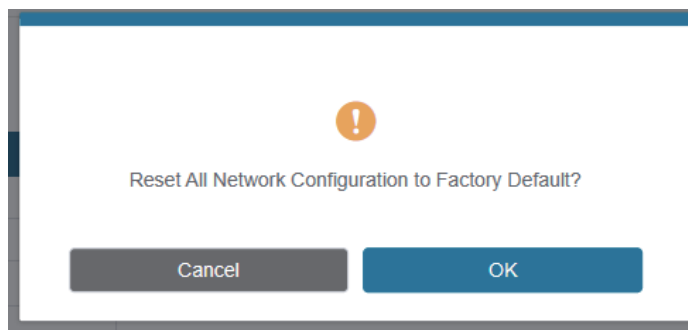

Model : ATZ HDMI-V2-44S-TW


Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

Click “OK” to search the IP Address again, as shown in the following figure

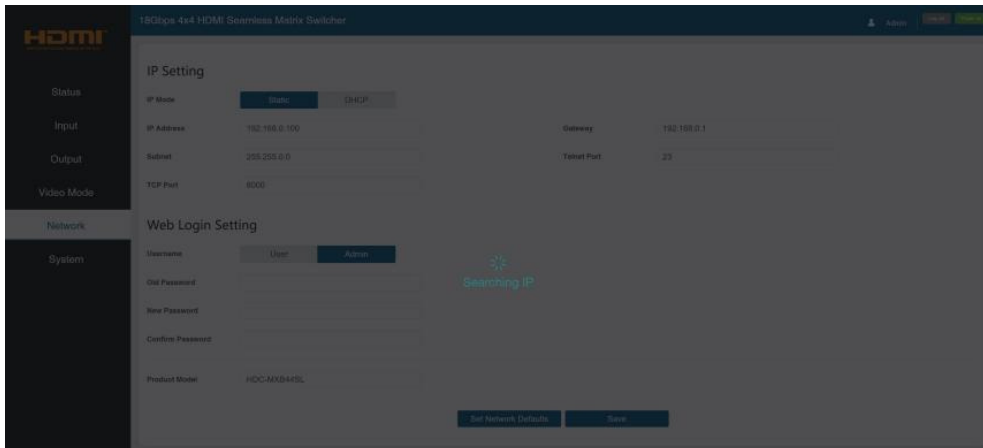

After searching is completed, it will switch to the login page, the default network setting is completed.

■ System Page

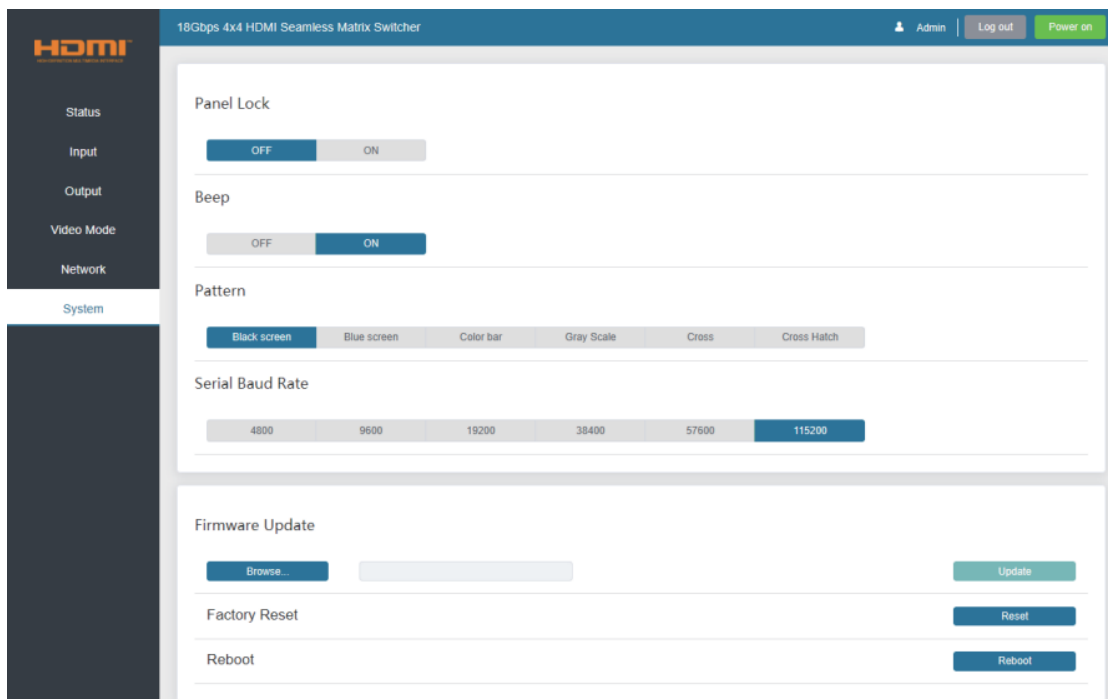

You can do the following operations on the System page:

- ① **Panel Lock:** Click to lock/unlock panel buttons. “ON” indicates that panel buttons are unavailable; “OFF” indicates panel buttons are available.

Model : ATZ HDMI-V2-44S-TW


Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

- ② **Beep:** Click to turn on/off the beep.
 - ③ **Pattern:** Click to select 6 patterns.
 - ④ **Serial Baud Rate:** Click the value to set the Serial Baud Rate.
 - ⑤ **Firmware Update:** Click “Browse” to select the update file, then click “Update” to complete firmware update.
 - ⑥ **Factory Reset:** You can reset the machine to factory defaults by clicking “Reset”.
 - ⑦ **Reboot:** You can reboot the machine by clicking “Reboot”.
- Note:** After reset/reboot, it will switch to the login page.

RS-232 Control Command

The product also supports RS-232 command control. Connect the RS-232 port of the product to a PC with a 3-pin phoenix connector cable and an RS-232 to USB cable.

The connection method is as follows:

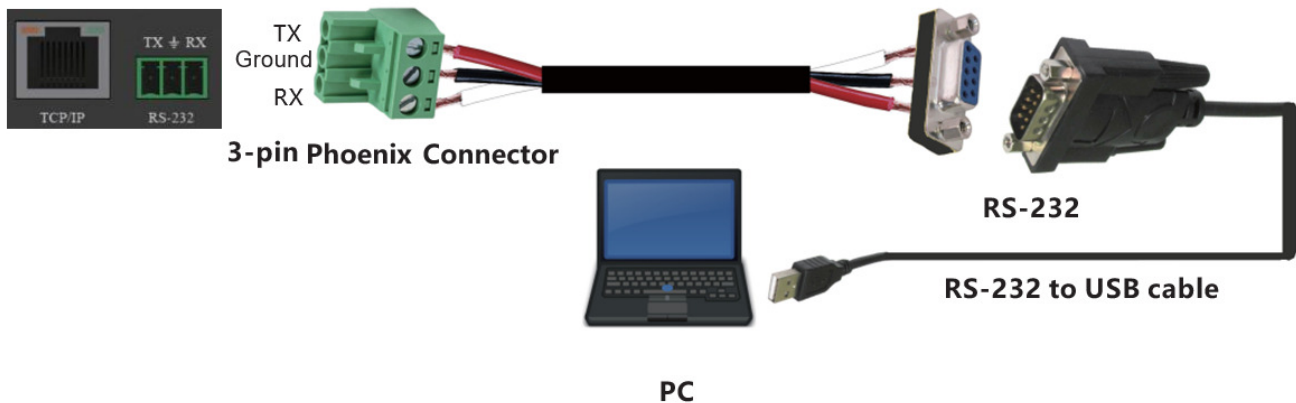

Then open a Serial Command tool on PC to send ASCII commands to control the product. The ASCII command list about the product is shown as below.

Command Code	Function Description	Example	Feedback	Default Setting
r output y res!	Get output y resolution(y=0~4) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4	s output 1 csc 1!	output 1 resolution: 3840x2160p60	
s output y csc x!	Set output y color space (y=0~4, x=1~4) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4 x=1. rgb444 x=2. ycbr444 x=3. ycbr422 x=4. ycbr420	s output 1 csc 1!	output 1 csc: rgb444	rgb444
	Get output y color space status. (y=0~4)			

pg. 17

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice.
© Copyright ATZ

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

r output y csc!	y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4	r output 1 csc!	output 1 csc: rgb444	
s output y hdcp x!	Set output hdcp(y=0~4, x=1~4) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4 x=1. hdcp 1.4 x=2. hdcp 2.2 x=3. follow sink x=4. follow source	s output 1 hdcp 1!	output 1 hdcp: hdcp 1.4	hdcp1.4
r output y hdcp!	Get output y hdcp status.(y=0~4) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4	r output 1 hdcp!	output 1 hdcp: hdcp 1.4	
s output y hmirror x!	Set output y h mirror(y=0~4,x=0,1) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4 x=0. h mirror off x=1. h mirror on	s output 1 hmirror 1!	output1 h mirror on	output 1 h mirror off output 2 h mirror off output 3 h mirror off output 4 h mirror off
s output y vmirror x!	set output y v mirror(y=0~4,x=0,1) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4 x=0. v mirror off x=1. v mirror on	s output 1 vmirror 0!	output1 v mirror off	output 1 v mirror off output 2 v mirror off output 3 v mirror off output 4 v mirror off
r output y mirror!	Get output y mirror status(y=0~4) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4	r output 0 mirror!	output 1 h mirror on, v mirror off output 2 h mirror on, v mirror off output 3 h mirror on, v mirror off output 4 h mirror on, v mirror off	

Command Code	Function Description	Example	Feedback	Default Setting
s output y stream x!	Set output y stream enable/disable (y=0~4, x=0~1) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4 x=0. stream disable x=1. stream enable	s output 1 stream 1!	output 1 stream: enable	enable

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

r output y stream!	Get output y stream status. (y=0~4) y=0. output all y=1. output 1 y=2. output 2 y=3. output 3 y=4. output 4	r output 1 stream!	output 1 stream: enable	
s output bg x!	Set output no signal background display mode (x=1~6) x=1. black screen x=2. blue screen x=3. color bar x=4. gray scale x=5. cross x=6. cross hatch	s output bg 1!	output background: black screen	black screen
r output bg!	Get output no signal background display mode	r output bg!	output background: black screen	
EDID setting				
s edid in x from z!	Set hdmi input x edid mode (x=0~4,z=1~18) x=0. all input x=1. input1 x=2. input2 x=3. input3 x=4. input4 z=1. 4k2k60_444, stereo audio 2.0 z=2. 4k2k60_444, dolby/dts 5.1 z=3. 4k2k60_444, hd audio 7.1 z=4. 4k2k30_444, stereo audio 2.0 z=5. 4k2k30_444, dolby/dts 5.1 z=6. 4k2k30_444, hd audio 7.1 z=7. 1080p, stereo audio 2.0 z=8. 1080p, dolby/dts 5.1 z=9. 1080p, hd audio 7.1 z=10. 1920x1200, stereo audio 2.0 z=11. 1360x768, stereo audio 2.0 z=12. 1024x768, stereo audio 2.0 z=13. user define1 z=14. user define2 z=15. copy from hdmi output 1 z=16. copy from hdmi output 2 z=17. copy from hdmi output 3 z=18. copy from hdmi output 4	s edid in 1 from 1! s edid in 0 from 1!	input 2 edid: 1080p, stereo audio 2.0 all inputs edid: 1080p, stereo audio 2.0	4k2k60_444, stereo audio 2.0
r edid in x!	Get input x edid mode(x=0~4) x=0. all input x=1. input1 x=2. input2 x=3. input3 x=4. input4	r edid in 0!	input 1 edid: 4k2k60_444, stereo audio 2.0 input 2 edid: 4k2k60_444, stereo audio 2.0 input 3 edid: 4k2k60_444, stereo audio 2.0 input 4 edid: 4k2k60_444, stereo audio 2.0	

Command Code	Function Description	Example	Feedback	Default Setting
Video wall setting				
s tw mode x!	Set tv wall display mode(x=1~10) x=1. 2x2 mode x=2. 2x1 mode x=3. 2x1-2 mode x=4. 1x2 mode x=5. 1x2-2 mode x=6. 3x1 mode x=7. 4x1 mode x=8. 1x3 mode x=9. 1x4 mode x=10. matrix mode	s tw mode 1!	tv wall mode: 2x2	tv wall mode: 2x2
r tw mode!	Get tv wall display mode	r tw mode!	tv wall mode: 2x2	

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

s tw h bezel x!	set tv wall horizontal bezel (x=0~10,+,-)	s tw h bezel 0!	tv wall horizontal bezel: 0	tv wall horizontal bezel: 0
r tw h bezel!	Get tv wall row bezel	r tw h bezel!	tv wall horizontal bezel: 0	
s tw v bezel x!	Set tv wall vertical bezel (x=0~10,+,-)	s tw v bezel 0!	tv wall vertical bezel: 0	tv wall vertical bezel: 0
r tw v bezel!	Get tv wall vertical bezel	r tw v bezel!	tv wall vertical bezel: 0	
s tw group y input x!	Set tv wall group y display which source input(y=0~4, x=1~4) y=0. tv wall group all y=1. tv wall group 1 y=2. tv wall group 2 y=3. tv wall group 3 y=4. tv wall group 4 x=1. hdmi input 1 x=2. hdmi input 2 x=3. hdmi input 3 x=4. hdmi input 4	s tw group 1 input 1!	tv wall group 1 input: hdmi input 1	tv wall group 1 input: hdmi input 1
r tw group y source!	Get tv wall group y display which source input(y=0~4) y=0. tv wall group all y=1. tv wall group 1 y=2. tv wall group 2 y=3. tv wall group 3 y=4. tv wall group 4	r tw group 0 source!	tv wall group 1 input: hdmi input 1 tv wall group 2 input: hdmi input 2 tv wall group 3 input: hdmi input 3 tv wall group 4 input: hdmi input 4	
s tw res x!	Set tv wall resolution (x=1~15) 1. 4096x2160p60, 2. 4096x2160p50, 3. 3840x2160p60, 4. 3840x2160p50, 5. 3840x2160p30, 6. 1920x1080p60, 7. 1920x1080p50, 8. 1920x1080i60, 9.1920x1080i50, 10. 1920x1200p60rb, 11.1360x768p60, 12.1280x800p60, 13.1280x720p60, 14.1280x720p50, 15.1024x768p60,	s tw res 3!	tv wall resolution: 3840x2160p60	3840x2160p60
r tw res!	Get tv wall resolution	r tw res!	tv wall resolution: 3840x2160p60	3840x2160p60

Command Code	Function Description	Example	Feedback	Default Setting
Network setting				
r ipconfig!	Get the current ip configuration	r ipconfig !	ip mode: static ip: 192.168.0.100 subnet mask: 255.255.255.0 gateway: 192.168.0.1 tcp/ip port=8000 telnet port=23 mac address: 00:1c:91:03:80:01	
r mac addr!	Get network mac address	r mac addr!	mac address: 00:1c:91:03:80:01	
s ip mode z!	Set network ip mode to static ip or dhcp,z=0~1 (z=0 static, z=1 dhcp)	s ip mode 0!	set ip mode:static. (please use "s net reboot!" command or repower device to apply new config!)	
r ip mode!	Get network ip mode	r ip mode!	ip mode: static	

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

s ip addr xxx.xxx.xxx.xxx!	Set network ip address	s ip addr 192.168.0.100!	set ip address: 192.168.0.100 (please use "s net reboot!" command or repower device to apply new config!) dhcp on, device can't config static address, set dhcp off first.
r ip addr!	Get network ip address	r ip addr!	ip address: 192.168.0.100
s subnet xxx.xxx.xxx.xxx!	Set network subnet mask	s subnet 255.255.255.0!	set subnet mask: 255.255.255.0 (please use "s net reboot!" command or repower device to apply new config!) dhcp on, device can't config subnet mask, set dhcp off first.
r subnet!	Get network subnet mask	r subnet!	subnet mask: 255.255.255.0
s gateway xxx.xxx.xxx.xxx!	Set network gateway	s gateway 192.168.0.1!	set gateway: 192.168.0.1 (please use "s net reboot!" command or repower device to apply new config!) dhcp on, device can't config gateway, set dhcp off first.
r gateway!	Get network gateway	r gateway!	gateway:192.168.0.1
s tcp/ip port x!	Set network tcp/ip port (x=1~65535)	s tcp/ip port 8000!	set tcp/ip port:8000
r tcp/ip port!	Get network tcp/ip port	r tcp/ip port!	tcp/ip port:8000
s telnet port x!	Set network telnet port(x=1~65535)	s telnet port 23!	set telnet port:23
r telnet port!	Get network telnet port	r telnet port!	telnet port:23
s net reboot!	Reboot network modules	s net reboot!	network reboot... ip mode: static ip: 192.168.0.100 subnet mask: 255.255.255.0 gateway: 192.168.0.1 tcp/ip port=8000 telnet port=10 mac address: 00:1c:91:03:80:01


Package Includes:

- 1 x 18Gbps 4x4 Seamless Matrix
- 1 x Matrix IR Remote
- 1 x 3pin-3.81mm Phoenix Connector (male)
- 1 x 20-60KHz IR Wideband Receiver Cable (1.5 meters)
- 2 x Mounting Ears
- 4 x Machine Screws (KM3*4)
- 1 x 12V/2.5A Locking Power Adapter
- 1x User Manual

Model : ATZ HDMI-V2-44S-TW

Description: 4x4 HDMI2.0 Matrix Switch 18G 4K@60 4:4:4 SEAMLESS VIDEO WALL

Product Diagram:

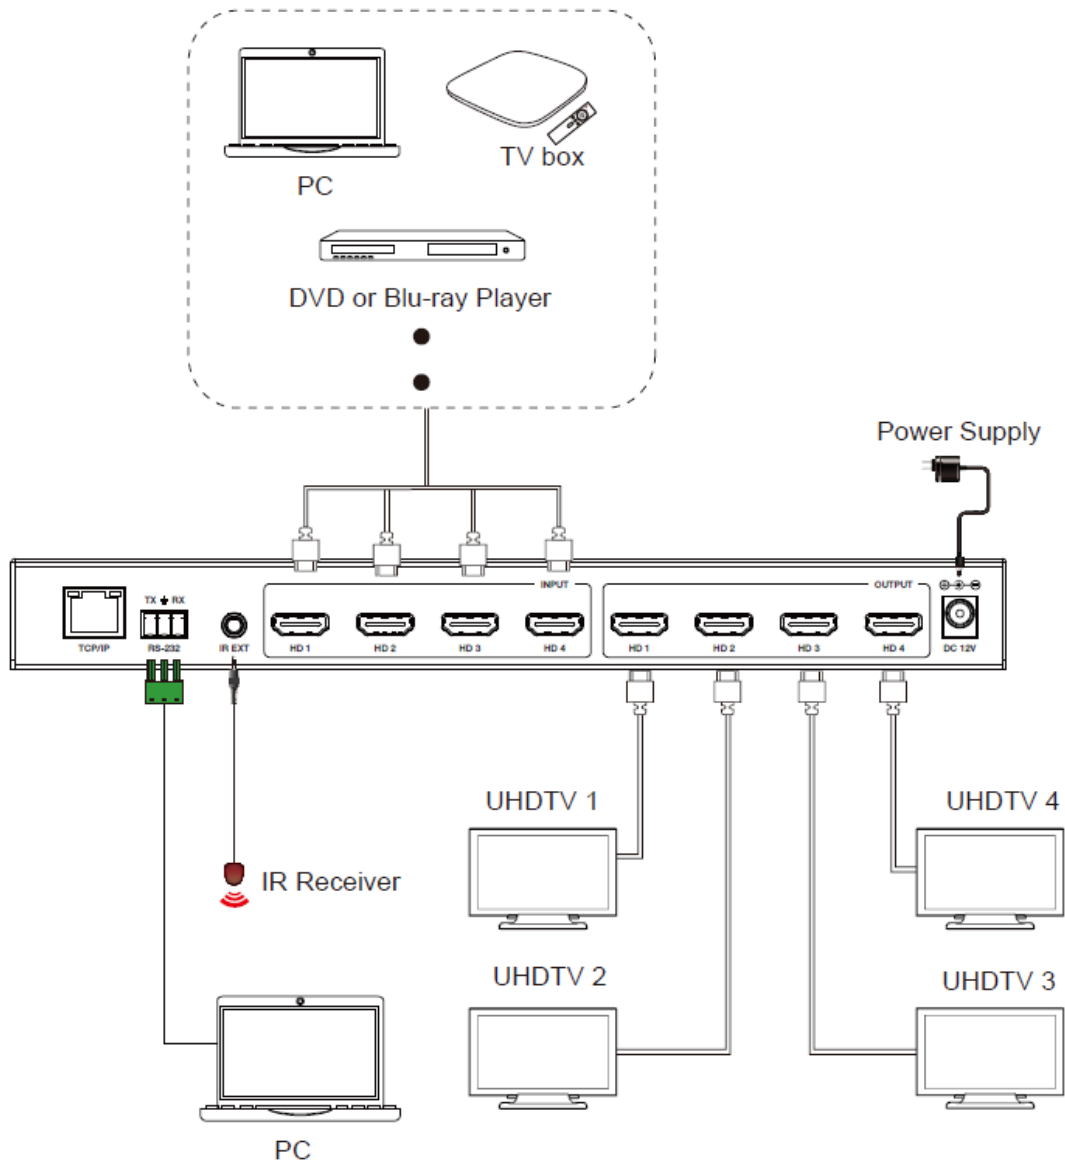

Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.



The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries