

**Stockcode** : ATZ VC-RS2VGA

**Description:** BNC Composite & S-Video to VGA Converter (Scaler)

---



**Stockcode** : ATZ VC-RS2VGA

**Description:** BNC Composite & S-Video to VGA Converter (Scaler)

## Features:

RCA Composite Video and S-video to VGA converter ATZ VC-RS2VGA allows your DVD, STB, game tube, to be displayed on standard computer monitor or LCD.

- Composite Video Interface: RCA
- Inputs: 1 x Composite Video, 1 x S-video and 1 x VGA;
- Output: 1 X VGA;
- Switch between 3 inputs to be output to the single VGA;
- Both PAL / NTSC are supported;
- Optional Resolution: 800×600@60HZ, 800×600@75HZ, 1024×768@60HZ, 1280x1024@60HZ
- Lightness, hue, contrast, saturation, color, etc. adjustable via button and auto-store when power off;
- Optional function: Remote Control

## Application:




**Stockcode** : ATZ VC-RS2VGA

**Description:** BNC Composite & S-Video to VGA Converter (Scaler)

## Functional Interface:



No.	Function	
(1)	VGA Out:	To connect VGA display (Computer monitor or LCD)
(2)	Video In:	To connect Composite Video devices (eg:DVR, CDD Camera, etc)
(3)	S-Video In:	To connect S-video devices
(4)	VGA In:	To connect PC host
(5)	DC 5V:	To connect power supply
(6)	LED	Power Status

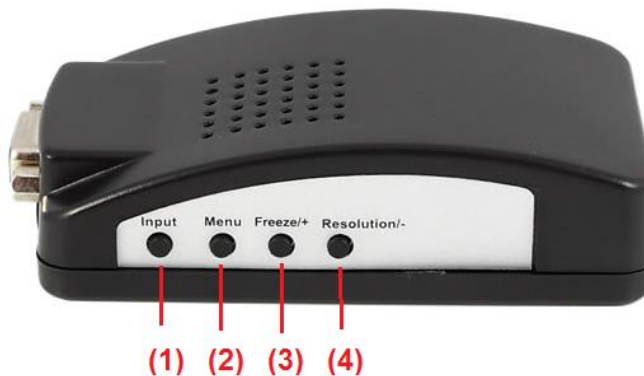

No.	Button	Function
(1)	Input	Switch between input sources Composite Video>>S-VIDEO>>VGA
(2)	Menu	Click it to adjust lightness, contrast, saturation and hue.
(3)	Freeze/+	<ul style="list-style-type: none"> <li>●Under BRI Menu, (Freeze/+): increase value of Brightness; (Resolution/-): decrease value of Brightness.</li> <li>●Under "CON" Menu, (Freeze/+): increase value of contrast; (Resolution/-): decrease value of contrast.</li> </ul>
(4)	Resolution/-	<ul style="list-style-type: none"> <li>●Under "COL" Menu, (Freeze/+): increase value of saturation, (Resolution/-): decrease value of saturation.</li> </ul>

**Stockcode** : ATZ VC-RS2VGA

**Description:** BNC Composite & S-Video to VGA Converter (Scaler)

---

		<ul style="list-style-type: none"><li>●Under "HUE" Menu, (Freeze/+): increase value of hue; (Resolution/-): decrease value of hue</li><li>●When menu is closed, Press : (Freeze/+) to freeze output display video;</li><li>●When menu is closed: Press: (Resolution/-) to select output resolution;</li></ul>
--	--	---

Press (Input) and (Resolution/-) at the same time: Default Setting

### **Packaging Contents:**

1. 1 x Converter
2. 1 x RCA cable
3. 1 x S-Video cable
4. 1 x Power adaptor
5. 1 x English Manual