

Model : ATZ VC-SDIx2-HDM

Description: SD/HD/3G SDI to HDMI Converter with SDI loop-out



Model : ATZ VC-SDIx2-HDM

Description: SD/HD/3G SDI to HDMI Converter with SDI loop-out

Important Safety Instructions

1. Do not place this device in confined space, ensure this device is well ventilated.
2. Do not expose this device to rain, moisture dripping and splashing environment.

The SDI to HDMI converter allows HD-SDI and 3G-SDI signals to be shown on HDMI displays while ensuring high bit rates of 2.970 Gbit/s to give you fast signal transmission without any loss. For professionals this means that it is now easier to distribute and extend your 3G SDI signal while giving you the ability to display your work on HDMI displays thanks to the built in HDMI converter.

Features:

1. Operation at 2.970Gbit/s, 1.485Gbit/s
2. Supports SMPTE 425M, SMPTE 424M, SMPTE 292M, SMPTE 259M-C
3. Connect with other units to extend your signal over long distances

Package Contents




Model : ATZ VC-SDIx2-HDM

Description: SD/HD/3G SDI to HDMI Converter with SDI loop-out

Installation Requirements

1. HDTV/SDTV with HDMI input
2. SDI output devices: SD-SDI, HD-SDI and 3G-SDI

Installation Guide

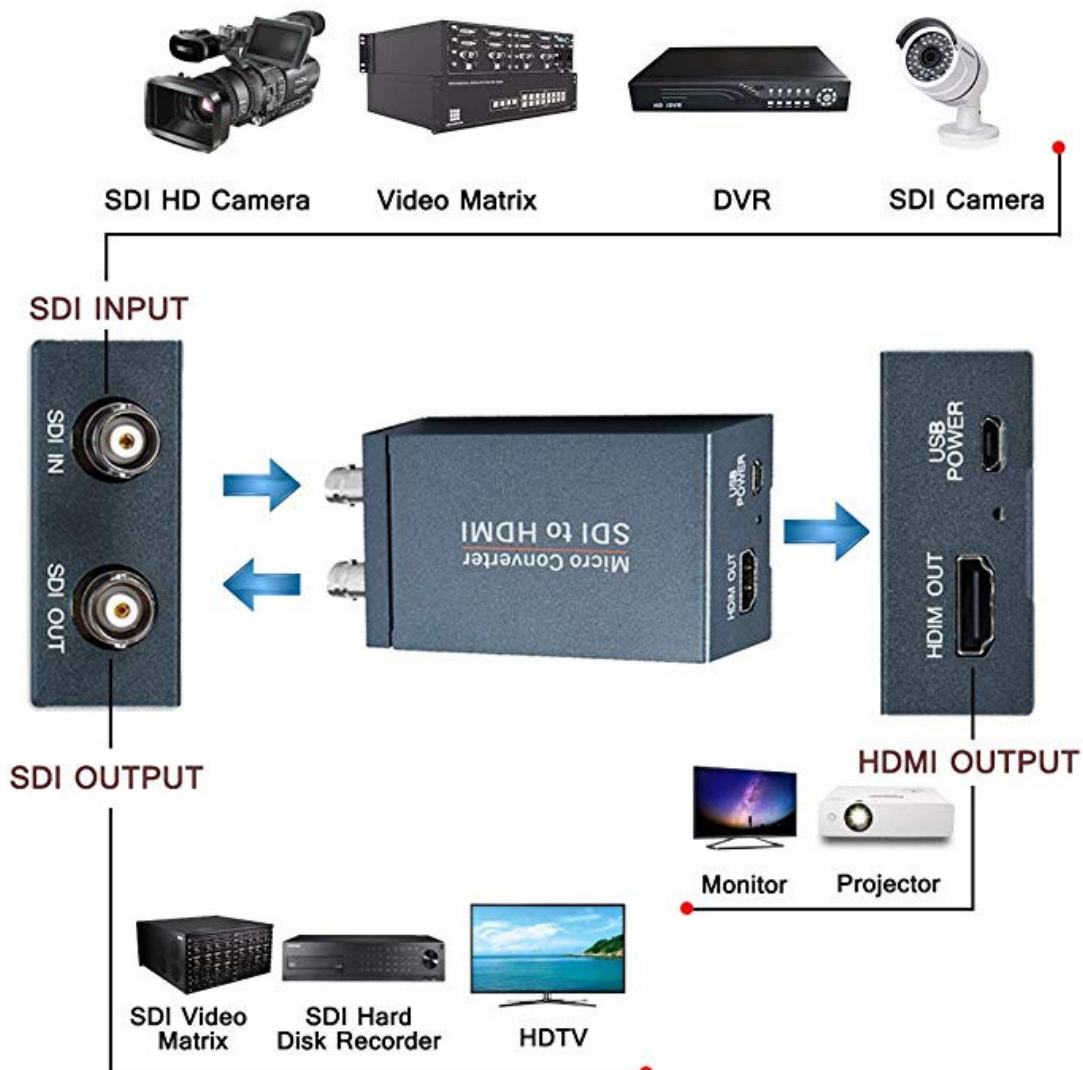

1. Connect SDI Cable from SDI source device to converter
2. Connect HDMI cable from converter to HDTV/SDTV
3. The converter start to work after all the devices are well connected

Model : ATZ VC-SDIx2-HDM

Description: SD/HD/3G SDI to HDMI Converter with SDI loop-out

Technical Specifications

Power Supply	USB DC 5V/1A
SDI Input format	SD-SDI, HD-SDI, 3G-SDI
SDI data transfer rates	270Mb/s, 1.485Gb/s, 2.97Gb/s
Impedance	75Ω
SDI input resolutions	720P/@30Hz/@50Hz/@60Hz, 1080i/@50Hz/@60Hz, 1080p/@50Hz/@60Hz, 1080P/@24Hz/@25Hz/@30Hz
HDMI Output resolutions	720P/@50Hz, 720P/@60Hz, 1080i/@50Hz, 1080i/@60Hz, 1080p/@24Hz/@25Hz/@30Hz/@50Hz/@60Hz
Dimensions	83x55x24(mm)
Weight	163g
Working Temperature	0°C-59°C

FAQ

Q: No HDMI output

Answer:

- 1: Please check if power LED is on or not, Please check if power supply is well connect.
- 2: If power LED lights, please check SDI input device is well connected and if the resolution of the SDI device is compatible with this converter box.
- 3: Please check if HDMI port is well connected and HDMI cable is in good condition.

Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.