

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



Front



Rear

pg. 1

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice.

© Copyright ATZ 2016

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



INTRODUCTION:

This unit is part of a 4K UHD Multi-Function Extension system that allows you to extend HDMI or VGA signals along with KVM using the TCP/IP protocol over regular Cat.5e/6/7 network cable. This extender supports the transmission of Ultra High-Definition signals (up to 4K@30Hz YUV 4:4:4 or 4K@60Hz YUV 4:2:0) with audio and USB up to 100m on a single cable. The transmission distance can be further extended (up to 100m per segment) by using gigabit network switches, allowing the user to cascade the system without signal loss or introducing delay.

It is also possible to have the extension system's Transmitter operate in multicast mode, allowing you to send a single AV signal to a large number of Receivers within the same local network. Additionally, that same multicast signal can be used to create large multi-display video walls with amazing simplicity. This system is perfect for both residential and commercial installation environments.

This system also features bi-directional IR and RS-232 pass-through, analog line level in/out, and a microphone input (on the Receiver), providing the user with a variety of audio options. The USB functionality allows the system to act like a remote USB hub which, when combined with the VGA input/output feature, provides a flexible remote KVM platform. Configuration information is provided via On Screen Display (OSD) and control is by WebGUI, Telnet, and front panel controls.

APPLICATIONS:

- HDMI, VGA, USB, Audio, IR, and RS-232 extension
- Broadcasting a system over a single Cat.5e/6 cable
- Multimedia display on a large number of displays via multicast
- Hotel or convention center display multi-monitor broadcast
- Long distance data and video transmission via cascading
- Distributed video matrix system
- Distributed video wall system
- Remote KVM control of a system

pg. 2
Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



SYSTEM REQUIREMENTS:

- HDMI or VGA source equipment such as media players, video game consoles, PCs or set-top boxes.
- HDMI or VGA receiving equipment such as HDTVs, monitors or audio
- Analog audio receiving equipment such as headphones, audio amplifiers or powered speakers.
- A Gigabit Ethernet network switch with jumbo frame support is required. (8K jumbo frames are strongly recommended.)
- A Gigabit Ethernet switch with "IGMP snooping" enabled is required for multicast support.

FEATURES:

- HDMI 2.0 and DVI 1.0 compliant
- HDCP 1.4 & 2.2 compliant
- 1×HDMI input, 1×VGA input & 1×VGA bypass output
- Video, audio and control transmission over TCP/IP in Unicast (point-to-point) or Multicast (single-to-many) modes
- Multi-monitor video wall support with 90° rotation
- HDMI input resolutions up to 4K@60Hz (YUV 4:2:0, 8-bit) or 4K@30Hz (YUV 4:4:4, 8-bit)

Note: 4K@50/60Hz (YUV 4:2:0) sources are automatically converted to 4K@25/30Hz (RGB) for output

- VGA input and output resolutions up to WUXGA (RB)
- Supports pass-through of audio formats including LPCM 2.0/5.1/7.1, and Bitstream over HDMI

Note: The optical output on Receivers can only support LPCM 2.0 & Bitstream sources.

- The analog Line In on the Transmitter sends audio directly to the analog Line Out and is inserted into the HDMI output on connected Receivers

pg. 3
Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



- The Mic In on the Receiver sends audio directly to the analog Line Out on the Transmitter
- Both Tx and Rx may be powered directly by PoE when connected to a Gigabit Ethernet switch that provides PoE (802.3af)
- Supports USB keyboard, mouse and storage extension
- Supports IR and RS-232 bypass
- Unit can be controlled via WebGUI, Telnet, and front panel controls

TECHNICAL SPECIFICATIONS:

HDMI Bandwidth	340MHz/10.2Gbps
Input Ports	1×HDMI 1×VGA 1×3.5mm (Stereo Audio) 1×IR Extender [3.5mm] 1×RS-232 [9-pin D-sub] 1×USB Type-B
Output Ports	1×Cat.5e/6/7 (LAN) 1×3.5mm (Stereo Audio) 1×IR Blaster [3.5mm]
Supported Resolutions	480i@60Hz - 4K@30Hz (4:4:4, 8-bit) VGA@60Hz - WUXGA@60Hz (RB)
IR Frequency	30 - 50kHz (30 - 60kHz under ideal conditions)
Power Supply	5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human Body Model: ±12kV (Air Discharge) ±8kV (Contact Discharge)

pg. 4
Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



Dimensions	231.5mm×25mm×108mm (W×H×D) [Case Only] 231.5mm×25mm×120mm (W×H×D) [All Inclusive]
Weight	660g
Chassis Material	Metal
Silkscreen Color	Black
Operating Temperature	0°C - 40°C/32°F - 104°F
Storage Temperature	-20°C - 60°C/-4°F - 140°F
Relative Humidity	20 - 90% RH (Non-condensing)
Power Consumption	7.15W

Video Specifications

Supported Resolutions (Hz)	Input		Output	
	HDMI	VGA	HDMI	VGA
640×480p@60	✓	✓	✓	✓
720×480p@59/60	✓	↘	✓	↘
720×576p@50	✓	✓	✓	✓
800×600p@60	✓	✓	✓	✓
1024×768p@60	✓	✓	✓	✓
1280×720p@50/59/60	✓	✓	✓	✓
1280×768p@60	✓	↘	✓	↘
1280×960p@60	✓	✓	✓	✓
1280×1024p@60	✓	✓	✓	✓
1440×480p@60	✓		✓	
1440×576p@50	✓		✓	
1366×768p@60	✓	✓	✓	✓
1600×1200p@60 (RB)	✓	✓	✓	✓
1920×1080p@24/25	✓	↘	✓	↘
1920×1080p@50/59/60	✓	✓	✓	✓

pg. 5
Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



1920×1200p@60 (RB)	✓	✓	✓	✓
1920×1080i@50/59/60	✓		✓	
3840×2160p@24/25/30	✓		✓	
3840×2160p@50/60 (YUV)	✓		✓	
4096×2160p@24/25/30	✓		✓	

Notes:

- *HDMI Input: Up to 4096×2160p@60Hz (YUV 4:2:0).*
- *HDMI Output: HDMI input at 4K@60Hz (YUV 4:2:0) will automatically be converted to 4K@30Hz (RGB) for output.*
- *VESA VGA up to 1920×1200@60Hz (Pixel clock < 150MHz).*

Audio Specifications

Supported Audio Formats:


Supported Formats (kHz)	HDMI Input	HDMI Output
LPCM 2.0@44.1/88.2/176.4	✓	✓
LPCM 2.0@32/48/96/192	✓	✓
LPCM 5.1@44.1/88.2/176.4	✓	✓
LPCM 5.1@32/48/96/192	✓	✓
LPCM 7.1@44.1/88.2/176.4	✓	✓
LPCM 7.1@32/48/96/192	✓	✓
Standard Bitstream	✓	✓

pg. 6
Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension

OPERATION CONTROLS AND FUNCTIONS: Transmitter's Front Panel

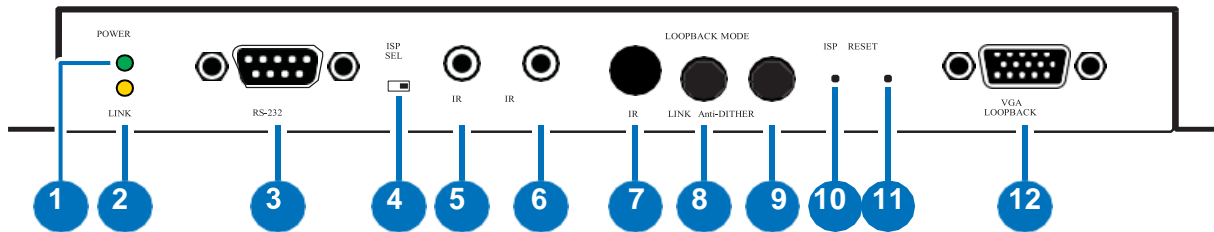

(1) POWER LED: This LED will flash while the unit is powering on and will illuminate solidly once it is ready to be used.

(2) LINK LED: If the Transmitter has no network connection the LINK LED will not illuminate. While the Transmitter is attempting to establish a connection with a Receiver the LINK LED will flash. When the Transmitter has established a stable connection with a Receiver the LINK LED will illuminate solidly.

(3) RS-232 IN: Connect directly to your PC/laptop to send commands to RS-232 devices connected to the Receiver. The baud rate is configurable, but the default baud rate is 115200.

Note: When the Transmitter is in multicast mode every connected Receiver unit can send RS-232 commands to the Transmitter and commands sent from the Transmitter side will be sent to all associated Receivers.

(4) ISP SEL: For Factory use only. By default this is set to the right (away from the RS-232 port) and allows normal RS-232 functionality. Setting this switch to the left enables ISP engineering mode.

(5) IR OUT: Connect to the provided IR Blaster to transmit IR signals sent from the associated Receiver to devices within direct line-of-sight of the IR Blaster.

(6) IR IN: Connect to the provided IR Extender to extend the IR control range of remotely located devices. Ensure that the remote being used is within direct line-of-sight of the IR Extender.

pg. 7
Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



Note: When the Transmitter is in multicast mode the IR signal is sent to all associated Receivers.

(7) IR WINDOW: Accepts IR signals from any standard remote control and sends the signal to the IR Out on the associated Receiver.

Note: When the Transmitter is in multicast mode the IR signal is sent to all associated Receivers.

(8) LOOPBACK/LINK: This button controls multiple functions:

(a) Loopback: Press this button momentarily to toggle the VGA Loopback function on and off, allowing you to locally monitor non- HDCP HDMI sources (1080p or below) for troubleshooting purposes.

(b) Video Link: Press and hold the button for 3 seconds to enable or disable the Video Link. When the link is disabled and the Receiver is connected to a display it will show the system's current IP and firmware information.

(c) Reset to Factory Defaults: Press and hold this button when powering the unit on until both the POWER and LINK lights are blinking. Once both lights are blinking you can reboot the unit and all settings will be returned to the factory defaults (Including resetting the IP mode to auto, broadcast channel to 0, and the streaming mode to multicast). A new IP address will be assigned automatically within the 169.254.xxx.xxx address range.

(9) MODE/Anti-DITHER: This button controls multiple functions:

(a) Video Mode: Press this button momentarily to toggle the video data streaming method between "Graphic" and "Video" modes. "Graphic" mode is optimized for high-detail static displays and "Video" mode is optimized for full motion video.

(b) Anti-Dither: Press and hold this button for 3 seconds to enable and switch between the three "Anti-Dither" modes (1-bit, 2-bit and off). Certain graphics cards use dithering to emulate a larger color palette, but dithering causes difficulty for maintaining low-bandwidth during real-time video compression, so these Anti- Dithering modes are designed to remove the dithering prior to compression and transmission of the signal. If

pg. 8

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice.

© Copyright ATZ 2016

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension

the source is not using dithering, please leave this feature disabled as it may cause a blocking effect with non-dithered content.


Note: This feature is set to "off" by default.

(10) ISP: For factory use only.

(11) RESET: Press this recessed button to reboot the unit (Settings will not be reset).

(12) VGA LOOPBACK OUT: Connect to an analog VGA monitor to locally view the connected VGA or HDMI (non-HDCP, 1080p or lower) source.

Transmitter's Rear Panel

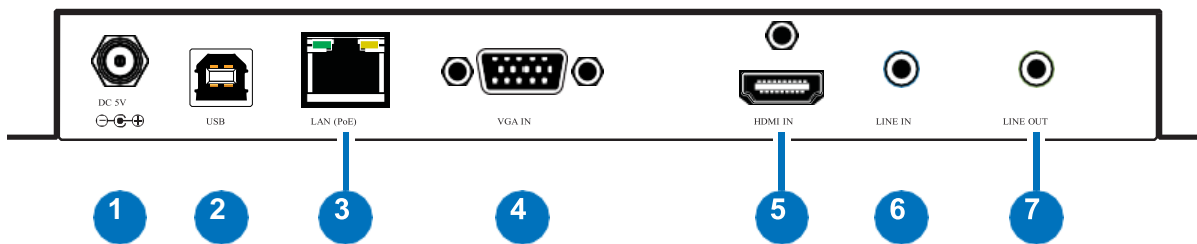

(1) DC 5V: Plug the 5V DC power adapter into the unit and connect it to an AC wall outlet for power. (Optional if powered by PoE)

(2) USB: Connect directly to a PC to extend its USB functionality to the ports on the connected Receiver.

(3) LAN (PoE): Connect via a Gigabit Ethernet switch to compatible Receiver(s) to transmit data, and to a PC/laptop to control the unit via WebGUI.
Note: This unit can be powered directly by the connected Gigabit Ethernet switch if it provides PoE (802.3af).

(4) VGA IN: Connect to VGA source equipment such as a PC or laptop.
Note: PC text and content with fine details may display with some visual artifacts when transmitted at 4K@60Hz (YUV 4:2:0).

(5) HDMI IN: Connect to HDMI source equipment such as a media

pg. 9

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension

player, game console or set-top box.



(6) LINE IN: Connect to the stereo analog output of a device such as a CD player or PC.

Note: When a live audio source is connected to the Line In, it will be automatically embedded into the transmitted signal, and will completely replace any existing HDMI audio.

(7) LINE OUT: Connect to powered speakers or an amplifier for stereo analog audio output. This will output the audio from the Mic In on the connected Receiver.

Note: This function is only available in Unicast mode. The Mic In audio channel from the Receiver is only active when an analog source is also connected to the Line In port on the Transmitter.


IR Cable Pin Assignments:

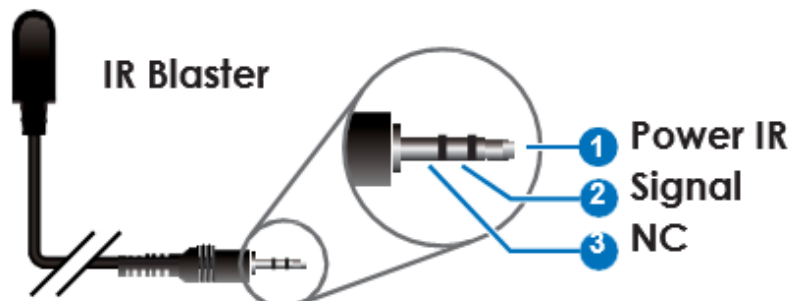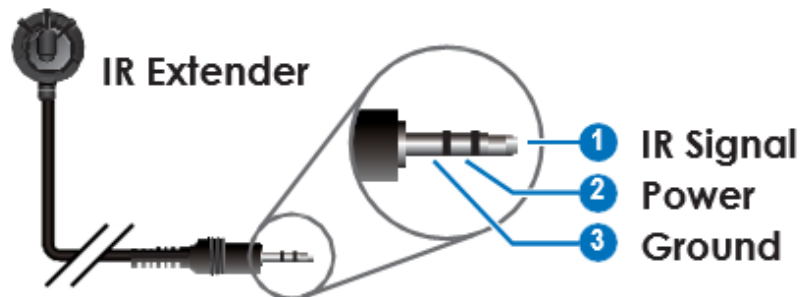

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension

Connection Diagram:

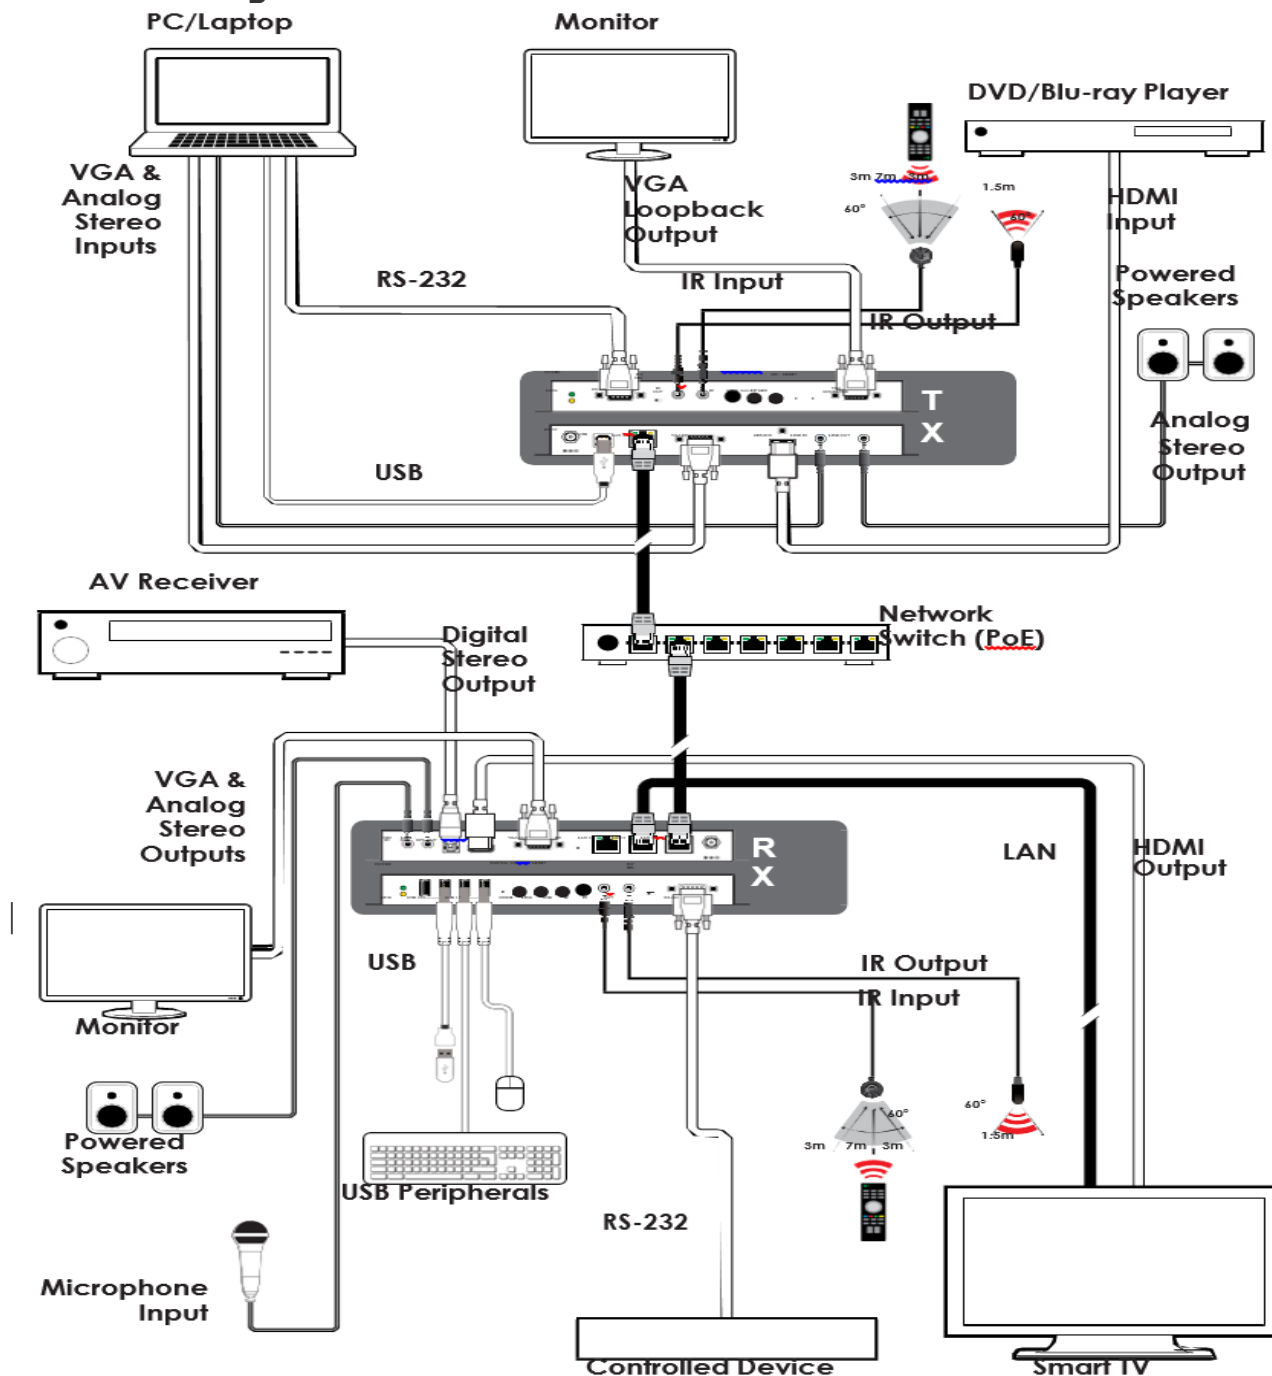

Model : ATZ HDMI4K+VGA-EM100IR-TX

Description: HDMI4K/VGA over IP Transmitter with IR, RS-232, PoE/ LAN & USB/KVM Extension



Package Includes:

- 1× HDMI/VGA over IP Transmitter with USB/KVM Extension
- 1× IR Extender Cable
- 1× IR Blaster Cable
- 1× 5V/2.6A DC Power Adaptor
- 1× Operation Manual

Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.

pg. 12

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice.

© Copyright ATZ 2016