

Model : ATZ HDMI-V2-41+AUDIO

Description : 4-to-1 HDMI v2.0 Switch w/IR remote 4k@60Hz, 18Gbps+Audio
Extractor, ARC



This is a high performance HDMI 4x1 switcher that supports HDTV formats up to 4Kx2K@60Hz and all HDMI 3D TV formats. It can extract HDMI stream audio to separate digital and analog audio output. This product supports HDCP repeater/CEC/ARC functions. Select any of the inputs by front panel button or IR Remote, the corresponding indicator LED on the front panel will be illuminated.

Model : ATZ HDMI-V2-41+AUDIO

Description : 4-to-1 HDMI v2.0 Switch w/IR remote 4k@60Hz, 18Gbps+Audio
Extractor, ARC

Features:

- Compliant with HDMI 2.0a, DVI 1.0 standards
- HDCP 2.2 and HDCP 1.4 compliant
- Video formats up to 4Kx2K@60 and all HDMI 3D video formats
- Support PCM, Dolby TrueHD, DTS-HD Master Audio up to 7.1CH
- Digital and analog audio output
- Support smart EDID management(Auto/2CH/5.1CH/7.1CH selectable)
- Support input port auto switching or manual switching mode
- Support Audio Return Channel (ARC)


Specifications:

Frequency Bandwidth	18Gbps
Input Ports	4 HDMI Female ports, 1 IR Receive port and 1RS232 port
Output port	1 HDMI Female port and 1 L/R & Optical port
HDMI Audio Output	PCM2.1/5.1/7.1CH,Dolby5.1, DTS5.1, Dolby-TrueHD, DTS-HD
ESD Protection	Human Body Model: ± 8kV (air-gap discharge)
	± 4kV (contact discharge)
Dimensions (mm)	180 (D) x85 (W) x 15 (H)
Weight (g)	380
Power Consumption	Max 2.5W
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F

Model : ATZ HDMI-V2-41+AUDIO


Description : 4-to-1 HDMI v2.0 Switch w/IR remote 4k@60Hz, 18Gbps+Audio Extractor, ARC

Switcher Operation controls and Functions:

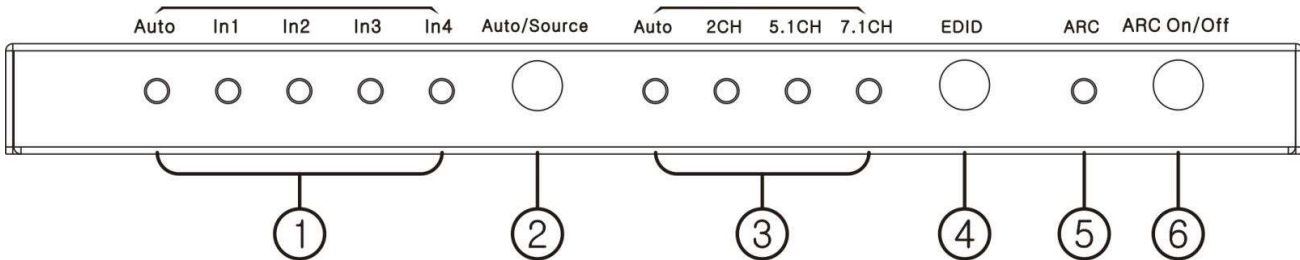

Front Panel:

- ① Input indicator LED, corresponding port LED will be illuminated when its port be selected.
- ② Auto or manual select button:
Press this button >2 seconds to select auto switching or manual switching mode.
Under manual switching mode, short pressing this button to select input port.
- ③ EDID status LED (Auto means using TV EDID).
- ④ EDID select button (Press this button to select EDID mode Auto/2.1CH/5.1CH/7.1CH)
- ⑤ ARC status LED (this LED will be illuminated if ARC is enabled successfully)
- ⑥ ARC function on/off button

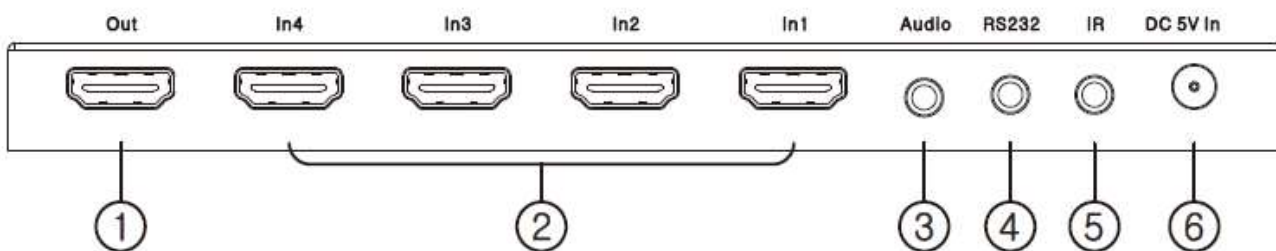


Rear Panel:

- ① HDMI output port, connect with HDTV or monitor by HDMI cable
- ② HDMI input ports, connect with DVD, PS4 or Set-top Box by HDMI cable
- ③ Audio output (including L/R analog and **optical** audio out)
- ④ RS232 port
- ⑤ IR receiver port
- ⑥ DC 5V input port

Model : ATZ HDMI-V2-41+AUDIO

Description : 4-to-1 HDMI v2.0 Switch w/IR remote 4k@60Hz, 18Gbps+Audio
Extractor, ARC

IR Remote:

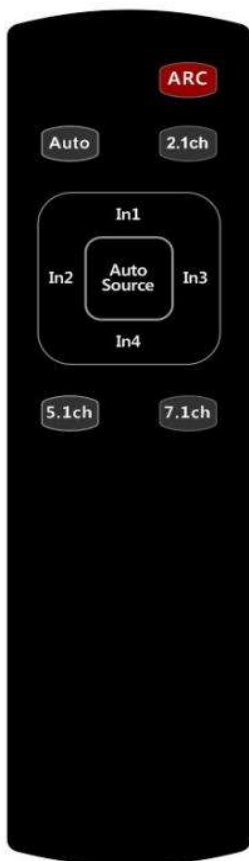

ARC: Press this button to enable or disable ARC function. ARC LED on front panel will be illuminated if ARC function is enabled successfully.

Auto/2.1ch/5.1ch/7.1ch: Press these buttons to select different EDID setting and corresponding LED on front panel will be illuminated.

Auto Source: Press this button to select auto switching or manual switching mode.

In1/In2/In3/In4: Under manual switching mode, press this button to select input port.

Model : ATZ HDMI-V2-41+AUDIO

Description : 4-to-1 HDMI v2.0 Switch w/IR remote 4k@60Hz, 18Gbps+Audio
Extractor, ARC

Product Diagram:



Package contents:

- 1 x HDMI 4x1 Switcher
- 1 x 5V/1A Power Adapter
- 1 x 38KHz IR Rx cable
- 1 x Optical convert header (for SPDIF audio output)
- 1 x HDMI 4x1 IR Remote
- 1 x Operation Manual

pg. 5

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice.

© Copyright ATZ

Model : ATZ HDMI-V2-41+AUDIO

Description : 4-to-1 HDMI v2.0 Switch w/IR remote 4k@60Hz, 18Gbps+Audio
Extractor, ARC

Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.