

Model : ATZ VC-VGA-HDMI-M
Description: VGA+Audio to HDMI Mini Converter



Model : ATZ VC-VGA-HDMI-M
Description: VGA+Audio to HDMI Mini Converter

Introduction:

The Mini VGA to HDMI converter can convert analog PC (RGBHV) and audio signal to digital HDMI format. It can connect the analog HD-15 VGA output from PC to the digital HDMI input of the latest HD ready plasma, LCD or DLP TV. Its high bandwidth capability supports a wide range of PC and HDTV resolutions.

Features:

Video and audio in full digital HDMI format, no transmission loss!

Supports standard VESA VGA timing output .HDMI output support up to 1920x1200@60Hz.

Provides advanced signal and processing with great precision colors.

No need external power adapter (supporting VGA port and internal power supply)
No need drive software, plug and play

Resolutions:

Automatically identify the HDTV or monitor EDID by DDC channel.

Adapt to HDTV or DVI monitor automatically.

No power adaptor, no messy cords—just one HDMI cable.

Hassle Free! Plug and play.

Supported input/output Mode:

640x480@60/72/75/85Hz, 720x400@70Hz,

800x600@60/72/75/85Hz, 1024x768@60/70/75/85Hz,

1152x864@75Hz, 1280x720@60Hz,

1280x768@60/75/85Hz, 1280x800@60/75/85Hz,

1280x960@60Hz, 1280x1024@60/75Hz,


1360x768@60Hz, 1400x1050@60Hz,

1440x900@60Hz, 1600x1200@60Hz,

Model : ATZ VC-VGA-HDMI-M
Description: VGA+Audio to HDMI Mini Converter

1680x1050@60Hz, 1920x1080@60Hz,
 1920x1200_RB@60Hz, 1920x1200@60Hz

Interface specifications:

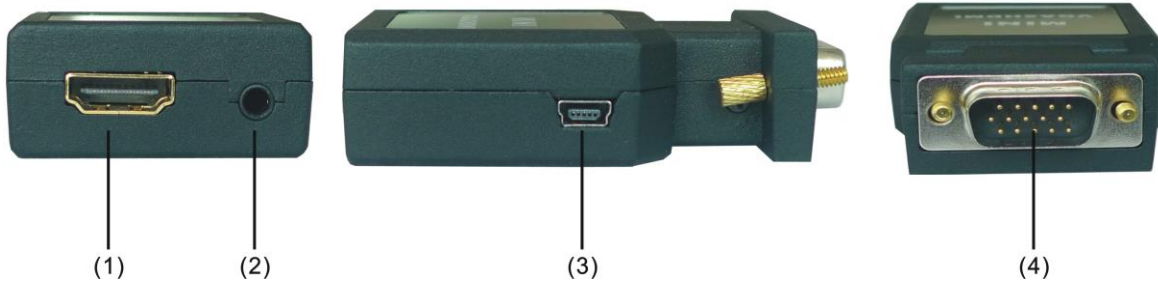

(1)-----HDMI Output **(2)** -----Audio Input
(3)-----USB 5V Input **(4)** -----VGA Input

Accessories:

USB Cable-----1 PCS
 VGA Cable (20cm) -----1 PCS
 Audio Cable-----1 PCS
 User Manual (EN) -----1 PCS

SPECIFICATIONS

Signal Inputs/Output	
Video Input	VGA(RGBHV)
HDMI Output	compatible with HDMI 1.3
Connector	VGA/HDMI
Input Signal	RGB: 0.7 Vp-p 75 ohm
H + V	3 to 5 Vp-p
Audio Input	Analog audio L,R

Model : ATZ VC-VGA-HDMI-M
Description: VGA+Audio to HDMI Mini Converter

Size(L-W-H)	72 x 41 x 18 mm
Weight (Net)	0.12Kg
Warranty	1 Year
Environmental	
Operating Temperature	0 °C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Requirement	
External Power Supply	USB Power(500mA)
Power Consumption	0.5 watts (max)
Converter Unit	FCC,CE
Accessories Adapter	
DC Power Adapter	USB Cable
User Manual	English Version

Model : ATZ VC-VGA-HDMI-M
Description: VGA+Audio to HDMI Mini Converter

Connection Image:

