

Model : ATZ HDMI-V2.1-31
Description: 3-to-1 HDMI 8K@60 Switcher



This ATZ 8K HDMI2.1 Switcher 3 is a Selector Hub 3-In-1-Out for PS5, XBOX Series X, PC, or other multimedia interface devices to 8KTV/ HD Multimedia monitors/ Projectors. It supports 8K@60Hz, 4K@120Hz video, Dolby Vision UHD IR HDCP2.3.

Model : ATZ HDMI-V2.1-31
Description: 3-to-1 HDMI 8K@60 Switcher

Features:

- Supports 3 Port HD Multimedia Interface Switcher.
- Plug and Play.
- Self-powered.
- Applicable for Work, Home Entertainment and Learning.
- Supported Resolution Formats: 480P 720P 1080P 2160P at 120 60 50 30 25 24Hz, up to 4320 at 50 60Hz YCC420, HDR for Dolby Color Depth: 8/10/12/16Bit at 2160P, 8/10bit at 4320P
- Supported Sound Format: for Dolby HD DTS HD, for Dolby Atmos, for Dolby AC3 DTS LPCM, etc.

Installation:

- To use HDMI cable to connect the HD source with the HDMI input port of device.
- To use HDMI cable to connect the HDMI output port of device with the display.
- To use the USB TO DC 3.5mm power cable to connect the DC5V Port of the device with USB Power source like TV or USB Power Docking when external power is required.
- Connect IR Receiver cable to the IR jack, then press again the "Switch" button at device or press the button at remote to operate the device.

Function of "Auto switching"

- This Switch support Auto Switch function, it will be auto-selected to the input channel port where a new connection is established (new signal source connected); it will also auto jump to the next active input channel when the current selected channel signal is turned off, or cable disconnected.
- Press the "A" button at remote or press & hold the "Select" button for 5 seconds to turn on or turn off the auto switch function.
- When the input channel LED flashes for one time, the auto switch is turned on; when the input channel led light flashes for three times, the auto switch function is closed.
- If the signal resolution is 8K@60Hz or 4K@120 Hz, please use HDMI2.1 standard cables, and the cable should be as short as possible.
- The product has power off memory function. The setting state of the output channel is Recorded and saved. The saved data will be automatically retrieved for configuration when it is turned on again.


Model : ATZ HDMI-V2.1-31
Description: 3-to-1 HDMI 8K@60 Switcher

Specifications:

Input channel	HDMI port x3
Output channel	HDMI port x1
Material	ABS
Video format	480P/720P/1080P/2160P@24/25/30/50/60/100/120Hz Up to 4320P@50/60Hz(YCC420), Support HDR/Dolby Vision
Deep color	8/10/12/16Bit@2160P 8/10bit@4320P
Audio format	Dolby HD/DTS HD/Dolby Atoms/Dolby AC3/DTS/LPCM Etc.
HDMI input cable length	4320P/AWG 26 ≤3m; 2160P/AWG 26 ≤5m; 1080P/AWG 26 ≤10m
HDMI output cable length	4320P/AWG 26 ≤3m; 2160P/AWG 26 ≤5m; 1080P/AWG 26 ≤10m
HDMI transmission bandwidth	1GHz Max.
HDMI transmission rate	40Gbps Max.
Auto switch	Support
Power adapter	Input: AC 100~240V Output: DC 5V/1A
Max working current	400mA
Working temperature:	-5 ~ +40°C
Working humidity range	5 to 85%RH (No Condensation)
Storage temperature	-15 to 55°C
Storage humidity	5 ~95%RH(No Condensation)
Size	82x58.5x18.4(mm)
Weight	47g

Model : ATZ HDMI-V2.1-31
Description: 3-to-1 HDMI 8K@60 Switcher

Remote Control:

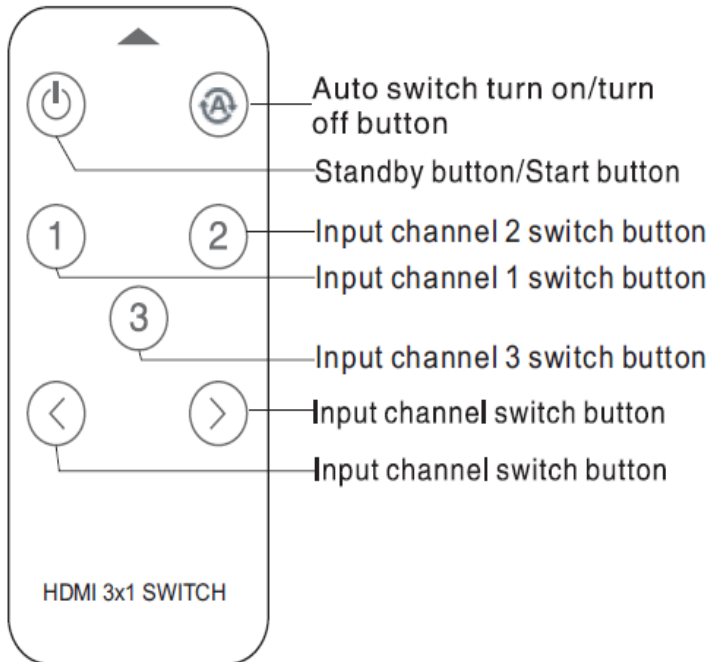


Package Includes:

- 1x Remote control
- 1x USB Cable x1
- 1x IR Receiver cable

Model : ATZ HDMI-V2.1-31
Description: 3-to-1 HDMI 8K@60 Switcher

Product Diagram:

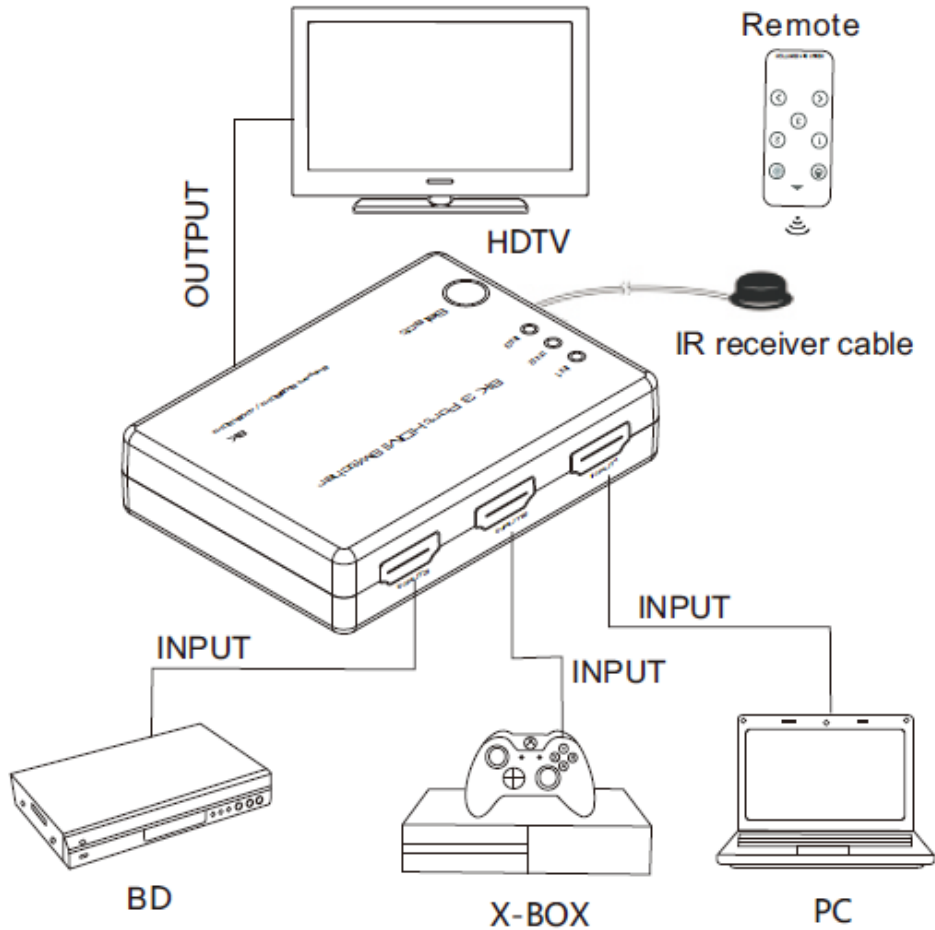

Warranty: 2 Years

Warranty is effective from the date of original delivery.
 This warranty shall be void if a serial number has been removed from the product.



The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries