

**Model** : AT VS116A

**Description:** 16 ports VGA Switch with Audio (Remote Control)



**Front View**



**Rear View**



**ATZ VS116AR** displays Video inputs from 16 computers on a single monitor or projector with Audio Function support. VS-1161AR is equipped with IR remote controller to control this VGA switch by 6 feet away. From use in test bench facilities, data centers and help desks, to

**Model** : AT VS116A

**Description:** 16 ports VGA Switch with Audio (Remote Control)

classrooms, and multi-media centers, 16 port VGA Switch & Extender with Audio & Remote delivers both performance and value.

## Features

- Display video input from 16 computers on 1 monitor or projector
- PC selection via front push buttons or IR remote control
- IR remote control allows you to switch outputs from up to 6 feet away
- Video signal enhancement allows monitor to be placed up to 210 feet (60m) away
- Supports video resolution up to 2048 x 1536
- High Bandwidth : 450 MHz
- Supports DDC/ DDC2B Plug & Play monitor
- Supports stereo audio op / 2-CH Audio
- Suitable for VGA, SVGA, XGA, SXGA, UXGA, and Multisync monitors
- Rack Mountable (1 U )
- Connectors:  
Input:HD 15/F (Female) & 3.5mm Audio plugx16 sets(16-Port)  
Output:HD 15/F (Female) & 3.5mm Audio plugx1 sets(1-Port)


## Accessories



- A. IR Remote Controller  
B. DC5V 2A Power Adaptor  
C. Rack mount Kit (RM-108)



## Diagram

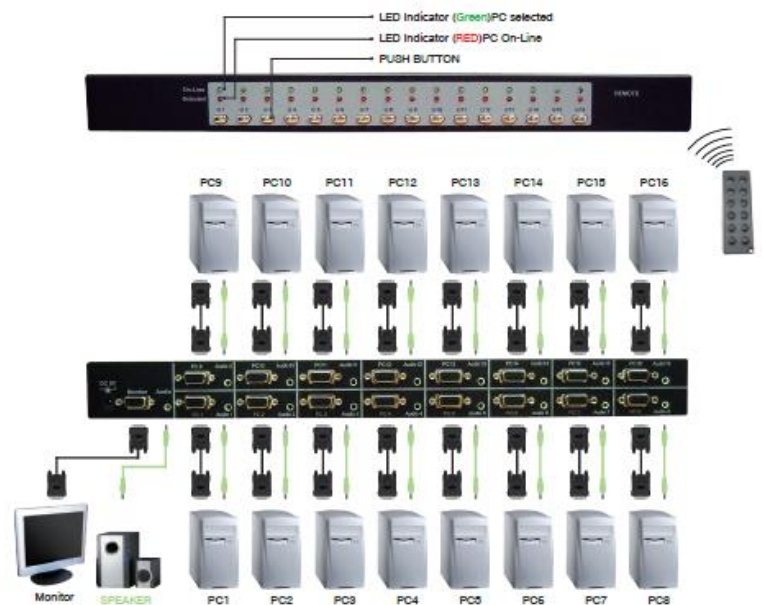

**Model** : AT VS116A

**Description:** 16 ports VGA Switch with Audio (Remote Control)



Specification		
Number Of Computers Controlled		16
Number Of Monitors Displayed		1
Selection Methods		Front Push Button or IR Remote Control
LED indicators		PC selection (Red) PC online (Green)
PC connector Ports	Video	16 x HDB-15 female
	Speaker	16 x stereo speaker jack
Console Ports	Video	1 x HDB-15 female
	Speaker	1 x stereo speaker jack
DDC, DDC2B		Max. resolution: 2048 x 1536@85Hz
Maximum Bandwidth		450 MHz
Operation System Supported		Windows 98/ME/2000/XP/Vista/7/2003 server,
		Linux, Mac OS9/OSX and Sun Microsystems
Power		By external power adaptor DC 5V
Dimension ( L x W x H )		44 x 15.7 x 4.5cm ( 17.3 x 6.1 x 1.5 inch )
Unit Weight		1890 g
Housing Material		Metal
Operation Temperature		32 ~ 122°F (0~50°C)
Humidity		0% ~ 80% RH