

Model : ATZ HDBT-E70-RB

Description : HDBaseT Extender Receiver Box for HDMI w/IR+PoC (70m)



This receiver is using the HDBaseT technology, it supports no compression, no losses, no latency HDMI signal transmission. It can work with other HDBaseT equipment, such as Sony HDBaseT projector. All the signals are transmitted by one single CAT5E/ CAT6/ CAT7 cable, for 1080P it can transmit to a distance of 70m, for 4K60Hz(4:2:0) it can up to 35m. Compatible with all the HDTV resolutions, HDCP2.2 protocol. It also supports bi-directional RS232 and IR transmission and realize the long distance control. Supports power over cable, users only need to power one side; It can be popularly used in media conferencing room, school, government, cinema and so on applications.

Features:

- Transmit highest quality audio and video, up to 70m for 1080p and up to 35m for 4K60(4:2:0) over Cat6/6a/7 cable
- Supports FULL HD, UHD, 3D, 4K60Hz
- HDCP2.2, HDMI2.0
- Bidirectional IR/Serial control signal transmission
- Power over Cable (POC) locally powered over Cat5e/6 cable at either end
- Supports 7.1 DTS Master HD, Dolby True HD,
- LED indicators, EDID pass-through
- Supports CEC control

Model : ATZ HDBT-E70-RB


Description : HDBaseT Extender Receiver Box for HDMI w/IR+PoC (70m)

Specifications:

Input	1*HDBaseT
Output	1*HDMI, 1*RS232, 1*IR-TX, 1*IR-RX
Protocol	Support HDMI2.0 and compatible with HDCP2.2
Resolution	1920x1200, 1680x1050, 1360x768, 1280x800, 1920x1080, 1600x900, 1366x768, 1280x720, 1024x576, 1920x1200, 1680x1050, 1360x768, 1280x800, 4096x2160@30Hz, 3840x2160@30Hz, 3840x2160@60Hz
Color Space	1080p: 36Bit Deep Color 4K: 24Bit True Color, 4:2:0
Bandwidth	10.2Gbps
Transmission Distance	CAT5e/6 cable: 70m(1080p60Hz), 35m(4K60Hz)
Dimension	115*84*16 (mm)
Weight (kg)	0.15
Power	AC: 100-240V 50/60Hz 1.5A Max DC: 12V 1500mA
Consumption	≤11W
Working Humidity	10%-90%
Working Temperature	0°C-50°C
Storage Temperature	-20°C-75°C

Model : ATZ HDBT-E70-RB

Description : HDBaseT Extender Receiver Box for HDMI w/IR+PoC (70m)

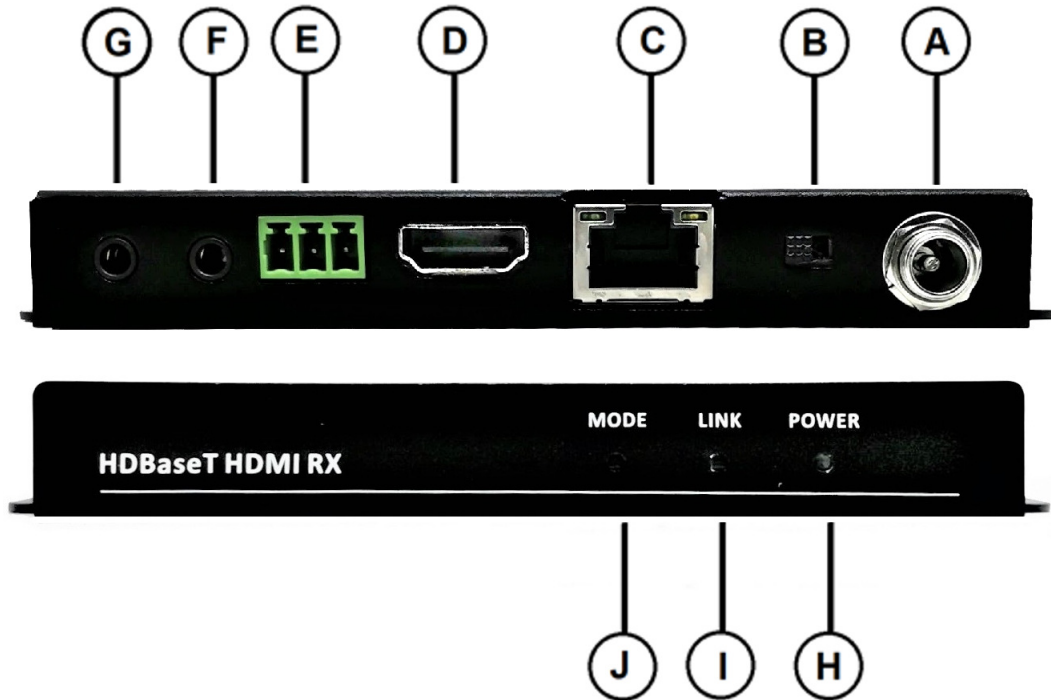

A: DC 12V input port

B: POC function OFF/ON switch

C: RJ45 input port

D: HDMI output port

E: 3-pin RS232 port

F: IR transmitter port

G: IR receiver port

H: POWER: The indicator will light up when power on

I: LINK: It will light up when the transmitter and receiver connected successfully, flickering means connection is not stable, off means the connection is failed.


J: MODE: It will flicker once per second if the system runs good, on the contrary, it will be off or light up.

RJ-45 connector

Suggest to use twisted shield pair 24AWG cable, the bandwidth at least 400MHz, and crystal connector.

Model : ATZ HDBT-E70-RB


Description : HDBaseT Extender Receiver Box for HDMI w/IR+PoC (70m)



Insert Twisted
Pair Wires
RJ-45
Connector

TIA/EIA-T568B	
Pin	Wire Color
1	White-orange
2	Orange
3	White-green
4	Blue
5	White-blue
6	Green
7	White-brown
8	Brown

Product Diagram:

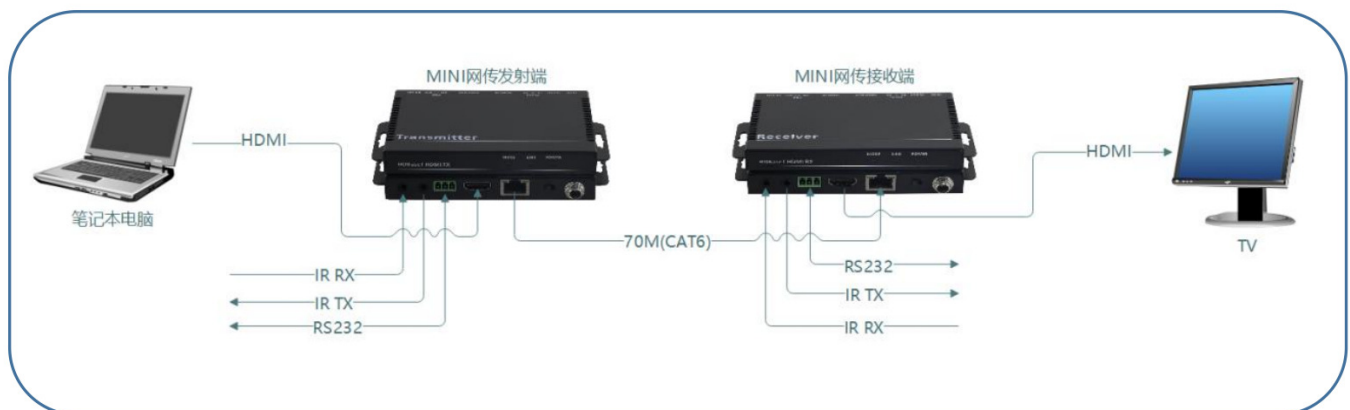

Package contents:

- 1x HDBaseT Receiver box
- 1x Power adapter(DC 12V)

Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.