

Model : ATZ KS18_KS116

Description : 8/16 port Combo(PS/2 & USB) KVM switch with USB local console + optional IP console, OSD, Rack mountable, Daisy Chainable, 1U size + (8/16 x 1.8m cable)






Features:

- Capable of connecting 16 or 8 servers in 1U.
- Support combo interface VGA-USB & VGA-PS/2.
- USB local console, optional remote IP console.
- Cascade up to 8 levels, support mixed CAT6 & DB15 Combo KVM switch.
- Mixed PS2/USB/SUN & MAC with multi-platform switch Capability.
- Auto scan for monitoring PCs, easy select via push button, Hot keys and OSD.
- Hot pluggable, no software or driver required. Easy and quick installation.

Model : ATZ KS18_KS116

Description : 8/16 port Combo(PS/2 & USB) KVM switch with USB local console + optional IP console, OSD, Rack mountable, Daisy Chainable, 1U size + (8/16 x 1.8m cable)

Rear of ATZ KS18

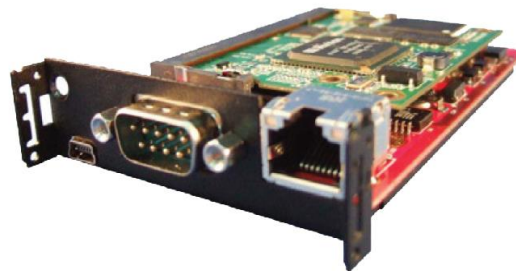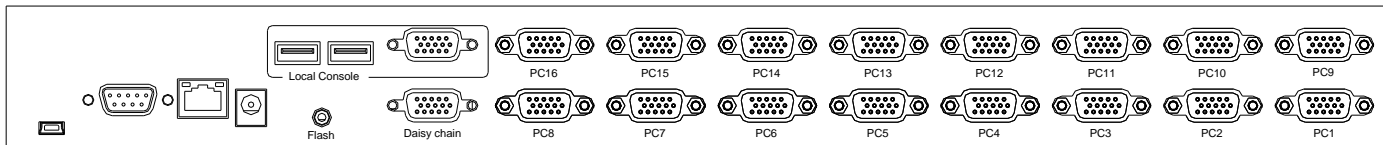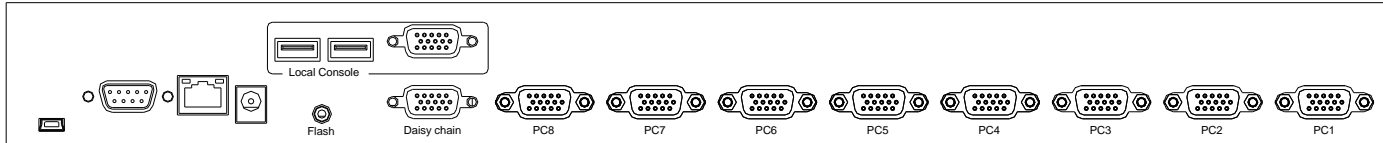

ATZ IP101

Optional Remote IP Access

- An expansion slot allows you to add an optional KVM over IP module to enable remote access to your servers.
- Gain BIOS level access to your servers for system maintenance, support or failure recovery via secure SSL authentication and encryption.

Model : ATZ KS18_KS116

Description : 8/16 port Combo(PS/2 & USB) KVM switch with USB local console + optional IP console, OSD, Rack mountable, Daisy Chainable, 1U size + (8/16 x 1.8m cable)

Specifications:

Part No.	ATZ KS18	ATZ KS116
No. of Computers	8	16
Max. no. of Computers	232 (Daisy Chain)	240 (Daisy Chain)
KVM port connector	HD DB15 Female	
Local Console	1x HD DB15 for VGA (up to 1920x1440 resolution) 2x USB Type A for KB / Mouse	
Optional IP Remote Console	1x RJ45 connector for 10/100M Ethernet (up to 1600x1200 resolution) 1x DB9 male connector for modem, Null modem and serial power control 1x mini USB 2.0 receptacle	
Daisy Chain	1x DB15 (Female), up to 8 levels	
Hot keys	Scroll-Lock, Caps-Lock, Num-Lock, Alt-Ctrl-Win	
Compatibility	Mix PCs, SUNs and MACs, support Win7/Vista/2003/XP, Linux, Unix	
Power	100-240V AC 50/60Hz external power adapter	
Environment	Operation temp.: 0 to 50°C Storage temp.: -20 to 60°C Humidity : 10% - 90%, non-condensing	
Physical Dimensions / Net Weights	448mm (W) x 167mm (D) x 44mm (H) / 3kg	
Packing Dimensions / Gross Weights	560*120*250mm / 3.5kg	

Related Items

ATZ KCU-1.8	1.8meter 2-in-1 KVM Cable - USB & VGA
ATZ KCU-3	3.0meter 2-in-1 KVM Cable - USB & VGA
ATZ KCU-5	5.0meter 2-in-1 KVM Cable - USB & VGA
ATZ KCP-1.8	1.8meter 2-in-1 KVM Cable - PS/2 & VGA
ATZ KCP-3	3.0meter 2-in-1 KVM Cable - PS/2 & VGA
ATZ KCP-5	5.0meter 2-in-1 KVM Cable - PS/2 & VGA
ATZ IP-101	KVM over IP Module for Remote Bios Level Access

Model : ATZ KS18_KS116


Description : 8/16 port Combo(PS/2 & USB) KVM switch with USB local console + optional IP console, OSD, Rack mountable, Daisy Chainable, 1U size + (8/16 x 1.8m cable)

Package Includes:

8x 1.8m KVM Cables (ATZ KS18)

16x 1.8m KVM Cables (ATZ KS116)

Product Diagram:

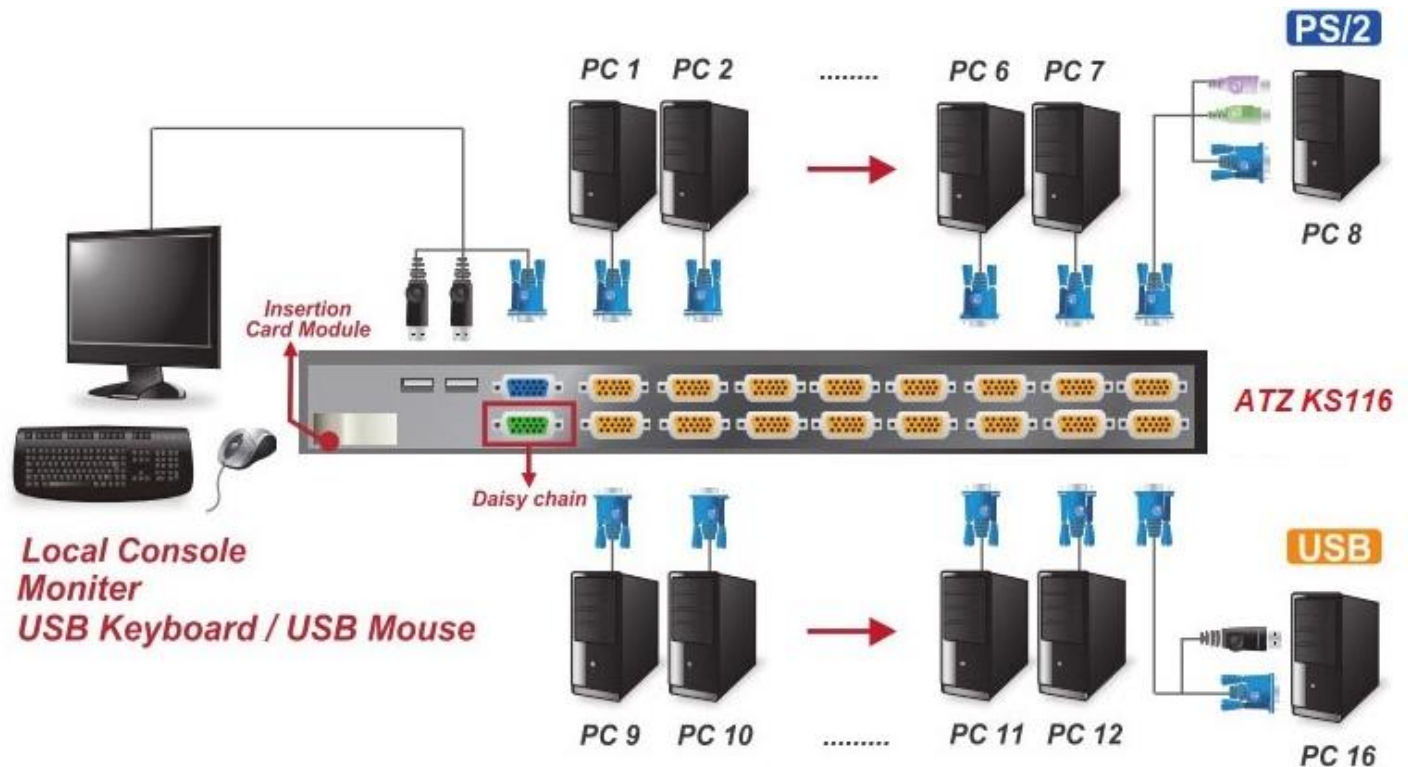

Warranty: 3 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.