

Description: 3U Dual 7" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -



Features:

- Compact 19 inch rack mountable with 3U height
- Dual 7 inch LCD panel, support 1024 x 600 resolution
- VGA, Composite Video Input
- 90 ° tilt adjustment while mounted in rack: 45° ~-45° (V)
- Heavy duty steel chassis with hardness glass protect screen
- Front osd control buttons to optimized display

Option:

- BNC Loop-in-out
- HDMI input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen



Description: 3U Dual 7" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -

Specifications:

| User Controls Interface: | | |
|-----------------------------------|--------------------------------|--|
| Power ON / OFF via Front Button | | |
| Power Mode Status LED indicator | | |
| OSD (On Screen Display) Buttons | | |
| LCD Characteristics: | | |
| Screen Size | 7 inch | |
| Backlight Type | LED | |
| Resolution | 1024x600 | |
| Contrast Ratio | 700:1 | |
| Brightness (cd/m2) | 250 | |
| View Angles (H/V) | 150/145 | |
| Pixel Size (HxV) mm | 0.05×0.15 | |
| Max. Color | RGB strip | |
| MTBF (Hrs.) | 50,000 | |
| Mechanical and Environment: | | |
| Height | 3U | |
| IP Protect | N/A | |
| Mounting | Rack Mount | |
| Construction | Metal Housing | |
| Operating Temperature | 0 - 50 deg. C | |
| Operating Humidity | 5% - 95% (non -condensing) | |
| Anti-Vibration | 5 - 500 Hz / 1 Grms PTP | |
| Anti-Shock | 15G / Peak (11 ms) | |
| Physical Dimension (WxHxD) | 482 x 132 x 63 (mm) | |
| Packing Dimension (WxHxD) | 600 x 190 x 320 (mm) | |
| Net Weight / Gross Weight | 5.5 / 7 (KGs) | |
| Certification and Approvals | CE / FCC / RoHs | |
| Input Signals: | | |
| VGA | D-SUB 15Pin Connector (Female) | |




Description: 3U Dual 7" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -

| Composite Video | RCA plug |
|------------------------------------|--|
| Audio | 3.5" Jack |
| Power Input | External power adapter |
| Touch-USB (option) | USB A Type connector |
| Touch-RS232 (option) | D-SUB 9P connector (Female) |
| Power Specifications : | |
| AC Power Input | 100-240VAC / DC 12V external AC adapter |
| Wide Range DC Power Input (option) | Screw Type Terminal Block with internal wide Range DC 9-36V power module |


Product Diagram:

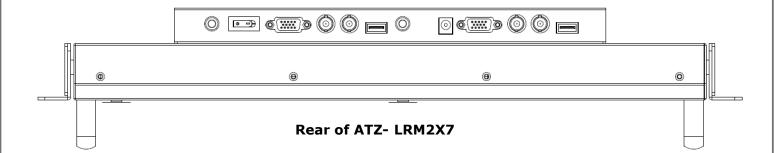



Description: 3U Dual 7" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -

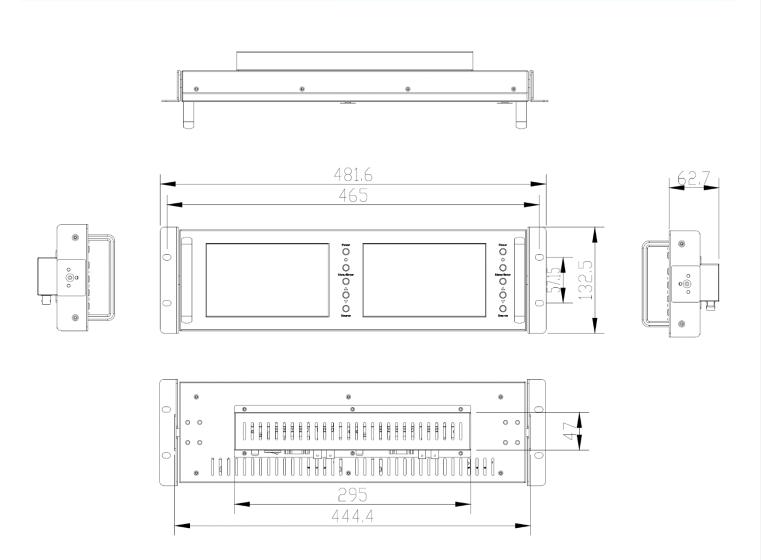

Warranty: 3 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.