

Description: 17.3" FHD Triple Monitor LCD Drawer + multi input DVI/VGA/Audio/USB

hub. (No Keyboard/Mouse)

- Optimize rack space. Maximize rack monitoring -







Description: 17.3" FHD Triple Monitor LCD Drawer + multi input DVI/VGA/Audio/USB

hub. (No Keyboard/Mouse)

- Optimize rack space. Maximize rack monitoring -

#### **Features:**

- 2U foldable dual 17.3 inch widescreen LCD display Drawer
- Triple DVI & VGA Port
- 1920 x 1080 WUXGA Ultra high resolution
- Support FHD with 1080p resolution.
- Build in 2x 2 watts speakers
- Independent front osd control buttons to optimized display
- Hidden & Independent retractable tray for ultra convenience

### **Option:**

- Composite video input
- HDMI or Display port input
- 3G/ HD/ SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

## **Specifications:**

User Controls Interface:	
Power ON / OFF via Front Button	
Power Mode Status LED indicator	
OSD ( On Screen Display ) Buttons	
LCD Characteristics:	
Screen Size	Triple 17.3"
Backlight Type	LED
Resolution	1920*1080
Contrast Ratio	400:1
Brightness ( cd/m2 )	300
View Angles ( H/V )	140/120
Pixel Size ( HxV ) mm	0.1989x0.1989
Max. Color	262K



**Description:** 17.3" FHD Triple Monitor LCD Drawer + multi input DVI/VGA/Audio/USB

hub. (No Keyboard/Mouse)

- Optimize rack space. Maximize rack monitoring -

<u>'</u>		
MTBF ( Hrs. )	10,000	
Mechanical and Environment:		
Height	2U Foldable	
Rack Depth	550 to 950mm ( cabinet front rail to rear rail )	
Mounting	Rack Mount with tilt adjustment	
Construction	Metal Housing	
Operating Temperature	0 - 50 deg. C	
Operating Humidity	5% - 95% ( non -condensing )	
Anti-Vibration	5 - 500 Hz / 1 Grms PTP	
Anti-Shock	15G / Peak ( 11 ms )	
Physical Dimension (WxHxD)	443 x 88 x 580 (mm)	
Packing Dimension (WxHxD)	735 x 590 x235 (mm)	
Net Weight / Gross Weight	16.5 / 20 (KGs)	
Certification and Approvals	CE / FCC / RoHs	
Input Signals:		
DVI-D	Triple DVI-D 24Pin Connector (Female)	
VGA	Triple D-SUB 15Pin Connector (Female)	
Audio	1x 3.5" Jack	
Power Input	Standard IEC Inlet	
Touch-USB ( option )	Triple USB A Type connector	
Touch-RS232 ( option )	Triple D-SUB 9P connector ( Female )	
Power Specifications :		
AC Power Input	Standard IEC Type Power Cord with Internal Power	
	adapter, 100-240V AC Input	
Wide Range DC Power Input	Screw Type Terminal Block with internal	
( option )		




Description: 17.3" FHD Triple Monitor LCD Drawer + multi input DVI/VGA/Audio/USB


hub. (No Keyboard/Mouse)

- Optimize rack space. Maximize rack monitoring -

# **Product Diagram:**

### Rear of ATZ LRMD17W-D2

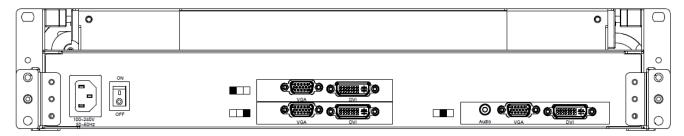

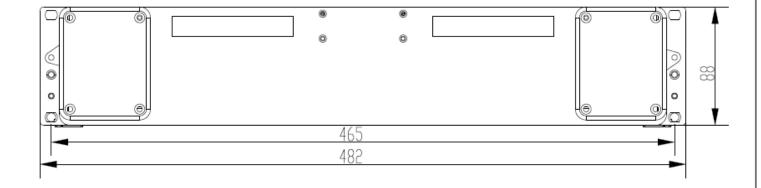




Description: 17.3" FHD Triple Monitor LCD Drawer + multi input DVI/VGA/Audio/USB

hub. (No Keyboard/Mouse)

- Optimize rack space. Maximize rack monitoring -

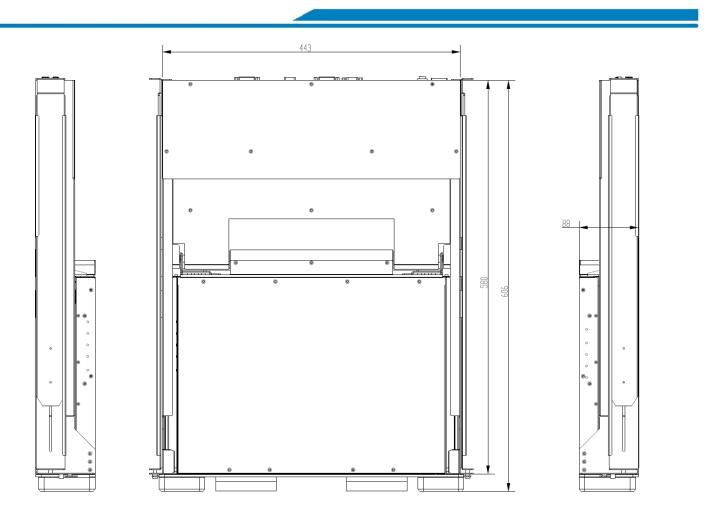

## **Warranty: 3 Years**

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.