


ATZ

CABLE SPECIFICATION SHEET

DESCRIPTION	Microphone/XLR CABLE [(22AWG+2/Tinsel Wire)*2C+Cotton+Drain+AL+SP Cable/Black PVC OD:6.0mm]	PART NO:	ATZ MIC-CABLE-2C22AWG
SPECIFICATION	[(17/0.16TC+2/Tinsel Wire+HDPE ID:1.40mm)*2C(Black, White)+Cotton+D17/0.16TC +AL+SP(60/0.10TC)+Black PVC OD:6.0±0.15mm]	REV.	A0
		DATE:	2024-06-13
Configuration Item		Unit	Specification
AWG		Awg	22AWG
No. of conductor		p, c	2C
Conductor	Material	---	Tinned Copper(TC)
	Construction	No./mm	17/0.16±0.008
	Material	---	Tinsel Wire
	Construction	No./mm	2/0.24±0.008
	Stranded diameter	mm	0.98
Insulation	Material	---	HDPE
	Nom. Thickness	mm	0.22
	Diameter	mm	1.4±0.05
	Color	---	Black
	(Twisted pair 60+/-2mm)		
Filler	Material	---	Cotton thread
Drain	Material	---	Tinned Copper(TC)
	Construction	No./mm	17/0.16± 0.008mm
Tape	Material	---	Aluminun Mylar Tape
	Over Lap	%	25% MIN
Spirally	Material	---	Tinned Copper(TC)
	Construction	No./mm	60/0.10±0.008
Jacket	Material	---	PVC
	Min. Thickness	mm	0.5
	Nom. Thickness	mm	0.6
	O.D	mm	6.0±0.15
	Color	---	Black
Marking	High Performance Microphone/XLR 22AWG CABLE www.atz.com.sg 001M(001M-500M)		
	White Ink		

Configuration:

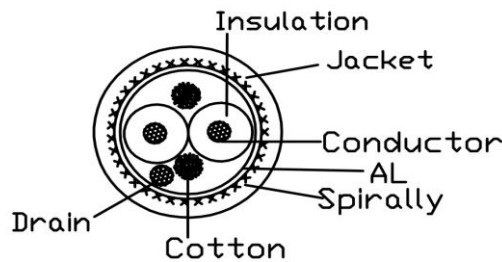

RATIFY	Hanson	APPROVED	David	DESIGN	Ray
--------	--------	----------	-------	--------	-----