

**Model** : ATZ AOC-USB-C-HDMI2.0-xxM (xx=length)

**Description:** USB3.1 Type-C to HDMI2.0 Active Optical Cable - 4K@60hz,  
10Gbps (5m) - 4K@60hz, 10Gbps (10M/20M/30M/40M/50M/60M)



10GBPS



60HZ



12BIT



3D



12BIT

## Features:

- Compatible with all Displayport 1.2 Standard devices
- Compatible with DP Alternate Mode on USB-C standard
- Four-core optical fiber transmits DP signals, Seven-core tinned copper transmits signaling protocol. Anti-electromagnetic interference. No attenuation.
- Support long transmission distance up to 60m
- Photoelectric conversion chip to improve compatibility, stability and service life.
- Plug and play, no need external power support, no drivers program required.
- Zinc alloy shell Anti-electromagnetic interference increase wear resistance and improve service life
- Compact zinc alloy shell, more suitable for pipe wiring

**Model** : ATZ AOC-USB-C-HDMI2.0-xxM (xx=length)

**Description:** USB3.1 Type-C to HDMI2.0 Active Optical Cable - 4K@60hz,  
10Gbps (5m) - 4K@60hz, 10Gbps (10M/20M/30M/40M/50M/60M)

## Application:

1. Large screen display multimedia display control system.
2. Security cameras.
3. Medical image display.
4. DVD set top boxes.
5. Public security HD camera.
6. Automotive data transmission.
7. Large poster. Home theatre.
8. High-definition digital bulletin board.
9. Family, school, monitoring, security.
10. Aviation aircraft video imaging system.
11. Splicing screen video display.



Mobile phones and players  
no more bore wifi connection




**Model** : ATZ AOC-USB-C-HDMI2.0-xxM (xx=length)

**Description:** USB3.1 Type-C to HDMI2.0 Active Optical Cable - 4K@60hz, 10Gbps (5m) - 4K@60hz, 10Gbps (10M/20M/30M/40M/50M/60M)

## Specifications:

|                     |  |
|---------------------|--|
| Resolution          | 4K*2K@60Hz                                       |
| Bandwidth           | 10Gbps   |
| Chip                | Imported photoelectric conversion chip           |
| Color space         | 4:4:4 Max  |
| Color depth         | 12 bit Max                                       |
| Type                | Type C Male - HDMI Male                          |
| Core                | 4-core fiber + 7-core tinned copper              |
| Outer diameter      | 5.2mm  |
| Shell               | Zinc alloy                                       |
| Jacket              | PVC, RoHS Directive-compliant                    |
| Power supply        | No external power supply required, plug and play |
| Support             | HDCP 2.2/HDR/EDID/DDE/3D                         |
| Working temperature | -40°C~70°C                                       |

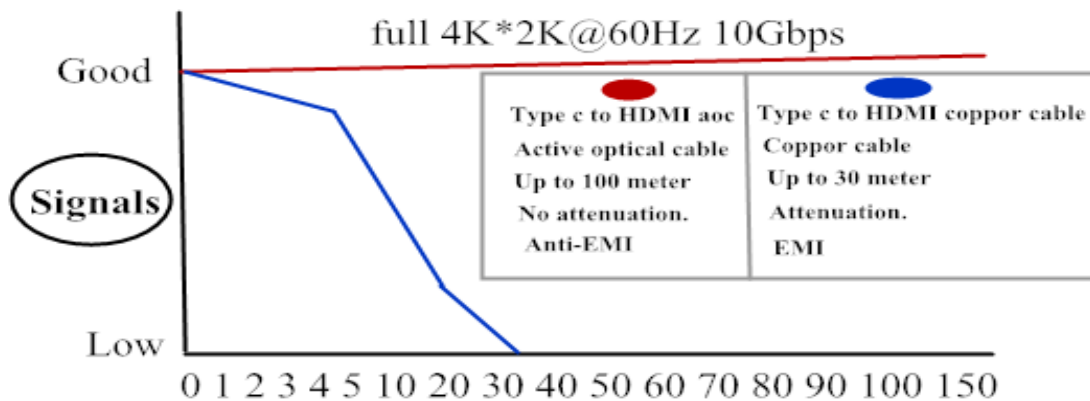


## Package Includes:

1x USB-C to HDMI Active Optical Cable V2.0 - 4K@60hz, 10Gbps

**Model** : ATZ AOC-USB-C-HDMI2.0-xxM (xx=length)

**Description:** USB3.1 Type-C to HDMI2.0 Active Optical Cable - 4K@60hz, 10Gbps (5m) - 4K@60hz, 10Gbps (10M/20M/30M/40M/50M/60M)

**Product Diagram:**

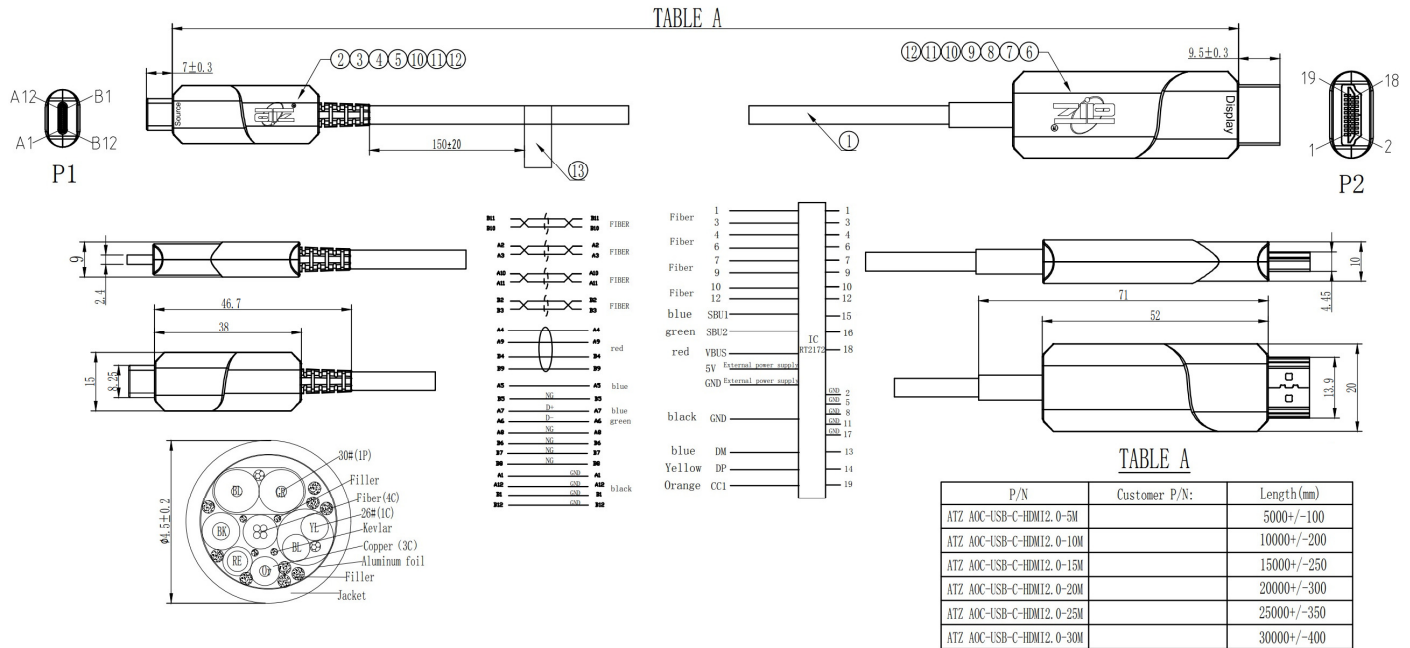

**Warranty: 2 Years**

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.