

Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)













Chipset brand: Silicon Line (German)







48GBPS





















Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)

Optional: Cable Reel & Waterproof cap



This armored HDMI Active Hybrid Cable for Indoor/Outdoor, is the most competitive long reach HDMI interconnection solution on the market. It supports HDMI Data Rate 12Gbps per channel, total 48Gbps with light weight, flexible and ultra-small long-term bending radius (45mm) hybrid cable. With our advanced optical engine embedded. This HDMI Hybrid Cable provides full HDMI signal integrity, support up to 100m maximum length, plug and play. No external power required.

Features:

- Up to 100m Maximum Length; (Custom Length Available)
- Low Power Consumption: 250mW (max);
- Plug and Play;
- Compatible with HDMI 2.1 standard;
- Hybrid 4-core optical fiber transmits TMDS signals, 7-core tinned copper transmits signalling protocol. Anti-electromagnetic interference, No attenuation.
- Support long transmission distance, the longest over 150 meters. (custom length available)
- Imported Photoelectric conversion chip to improve compatibility, stability and service life.
- Support HDCP2.3;
- Self-detecting function for EDID information;
- No loss of signal delivering crystal clear digital images instantly;
- Supports computer resolutions to 8K@60Hz;
- Supports 16bit/24bit (RGB/YCbCr) Deep Color depth, HDR, CEC, 3D and eARC.
- Both HDMI connectors can be further protected by IP68-rated waterproof hood and caps.
- Crush Resistance: Long term100kg; Short term 200kg.
- Zinc alloy shell Anti-electromagnetic interference increase wear resistance and improve service life.



Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)

*Remarks: This is a uni-directional cable. Please ensure correct connection with connector ends labelled with " \rightarrow to source" and "to display \rightarrow ".

The cable will not be damaged, nor will it cause the connected devices to be damaged, due to wrong connection.

Applications:

- Digital Signage
- LED signboards in streets and in stadiums
- Medical Imaging Equipment
- Airplane On-board Video System
- Home Theater
- Blue-ray, 3D video, Projector, Set-up box, DVR, Game Consoles and Computer
- TV Broadcast Station
- Conference Room Video Equipment
- Security systems

Absolute Maximum Rating:

| Parameter | Symbol | Min | Max | Unit |
|-----------------------|--------|-----|-----|------|
| Power Supply Voltage | VCC | 4.5 | 5.5 | V |
| Operating Temperature | Тор | 0 | 50 | °C |
| Storage Temperature | Ts | -40 | 70 | °C |
| Relative Humidity | Hs | 10 | 80 | %RH |

Recommended Operating Conditions:

| Parameter | Symbol | Min | Typical | Max | Unit |
|-----------------------|--------|------|---------|------|------|
| Power Supply Voltage | VCC | 4.75 | 5.0 | 5.25 | V |
| Operating Temperature | Тор | -40 | | 80 | °C |



Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)

Specifications:


| Item | Description | | | | |
|----------------------------|---|----------------------|--|--|--|
| Units | Transmitter (Source) | Receiver (Sink) | | | |
| HDCP & DDC | HDCP 2.3 Fully Support bi-directional EDID and HDCP | | | | |
| TIDOI & DDG | communication | | | | |
| Video Bandwidth | 48Gbps/ 12Gbps x 4 Channel (max)+ Clock. | | | | |
| Supported Resolution | 480p, 720p, 1080i and 1080p deep color, 4Kp50/60/100/120 and 8Kp50/60 | | | | |
| & Distance | up to 100m | | | | |
| Colour Space | 4:4:4 Max | | | | |
| O/E Converter | 4 channel 850 nm VCSEL array 4 CH GaAs PD array | | | | |
| Chip | Imported photoelectric conversion | chip | | | |
| Connector Type | HDMI type A | HDMI type A | | | |
| Cable Type | Armored Hybrid type with OM3 fiber and OFC copper wire | | | | |
| Cable Type | 24AWG/30AWG (19/0.06TC) | | | | |
| Cable Length | 15m/20m/30m/40m/50m/60m/70m/80m/90m/100m (with +/-30cm | | | | |
| 0 11 01: 11: | allowance) Custom length available. | | | | |
| Cable Shielding | double layer aluminum foil | | | | |
| Cable Outer Diameter | 5.8mm | | | | |
| Shell | Zinc alloy | | | | |
| Cable Reinforcing material | Stainless Steel and Dupont Kev | lar armor to protect | | | |
| Jacket Outer Material | TPU(Custom) | | | | |
| Cable Weight TBD | Cable Weight TBD | | | | |
| Cable Color TBD | Cable Color TBD | | | | |
| Differential Input | 100 ohm (typ) | | | | |
| Compliants | RoHS 2.0 & REACH compliant | | | | |
| Power Consumption | 250mW (max) | | | | |
| Power Supply | Non external power required | | | | |



Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)

HDMI Type A Pin Assignment:

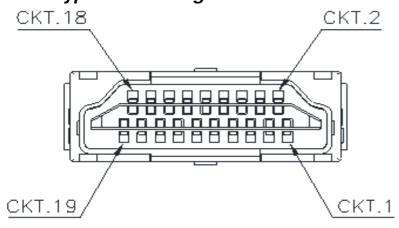

HDMI Type A Connector Pin Assignment


| PIN | Function | PIN | Function | |
|-----|------------------------|-------------------------|-----------------|--|
| 1 | T.M.D.S. Data 2+ | .D.S. Data 2+ 11 TMDS C | | |
| 2 | T.M.D.S. Data 2 Shield | 12 | TMDS Clock- | |
| 3 | T.M.D.S. Data 2- | 13 | CEC | |
| 4 | T.M.D.S. Data 1+ | 14 Utility | | |
| 5 | T.M.D.S. Data 1 Shield | 15 | SCL | |
| 6 | T.M.D.S. Data 1- | 16 | SDA | |
| 7 | T.M.D.S. Data 0+ | 17 | DDC/CEC Ground | |
| 8 | T.M.D.S. Data 2 Shield | 18 | +5V Power | |
| 9 | T.M.D.S. Data 0- | 19 | Hot Plug Detect | |
| 10 | TMDS Clock+ | | | |




Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)

Hybrid Cable Profile:



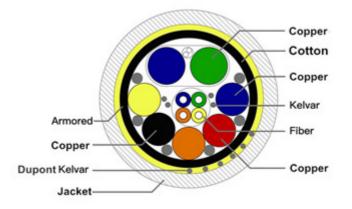

| Cable Sturcture | | Material/Model | Specifications |
|-----------------|------------------------|-----------------------|----------------|
| 1 | Metal Tube | 200CU Stainless steel | 4.4±0.1 |
| 2 | To strengthen the unit | Dupont Kevlar | 1670D*4 |
| 3 | Jacket | TPU | 0D 5.8±0.2 mm |

| Ten | Tensile(N) Crush Resistance(N/100mm) | | Bending Radius(mm) | | Temperature(℃) | |
|-----------|--------------------------------------|-----------|--------------------|---------|----------------|---------|
| Long Term | Short Term | Long Term | Short Term | Dynamic | Static | 4000 |
| 400 | 800 | 1000 | 2000 | 10D | 20D | -40~+80 |


Package Includes:

1x Armoured HDMI Active Optical Cable HDMI 2.1



Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)

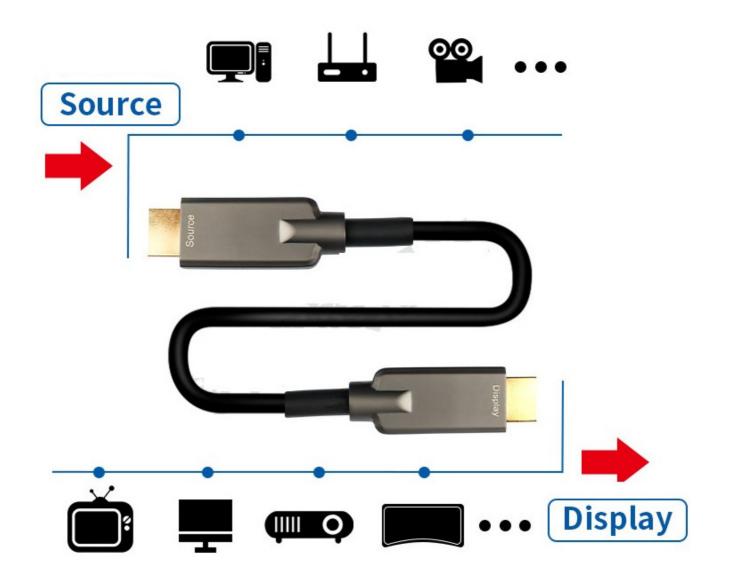




Description: Armoured HDMI Active Optical Cable V2.1 - 8K@60hz, 48Gbps

(10m/15m/20m/25m/30m/40m/50m/60m/70m/80m/90m/100m)

Product Diagram:

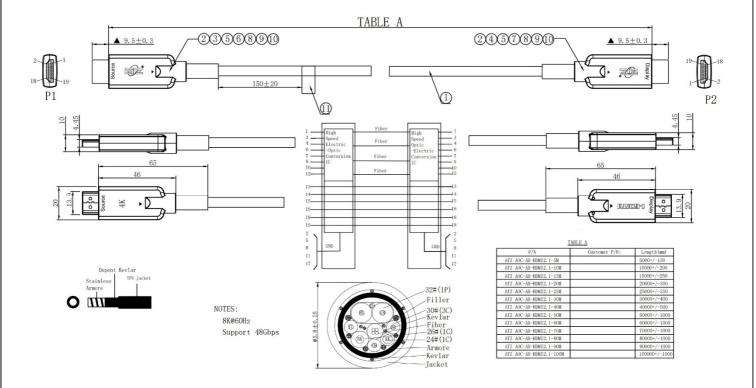

Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.



The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logoare trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries