

These stereo ATZ balance XLR cable assemblies are ideal for use in professional audio, video and stage lighting equipment. They are used to carry and deliver a high quality audio signal to the microphone or other output music gear, so that the final audio sound will have less unwanted noise from outside electrical interference.

For audio professionals and enthusiasts seeking reliable, high-quality sound transmission as it build to deliver superior audio performance, with a focus on durability and reliability.

These XLR socket to XLR plug cable assemblies have 3 pins as standard and a circular connector. Pin 1 is connected to the shielding of the cable to provide a ground, whereas pins 2 and 3 carry the actual sound itself.

This XLR cable has a XLR male connector one end and a XLR female connector on the other end.

Model ATZ XLR-MF-xxM 5 **Description**: XLR 3-pin Male to Female Microphone cable (xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Features:

- Connect balance line outputs to balance line inputs for optimum audio performance
- Shield surrounding centre conductors for maximum EMI / RFI noise rejection making the ٠ sound quality undisturbed by external signals.
- Professional Nickel-Plated Pins, anti-corrosion and oxidation resistance. With multiple plugand-pull tests, this mic cable is perfect for your daily prolong usage
- All-copper conductors with inner copper spiral shielding to reduce noise interference providing clear transmission
- Multi-stranded copper center conductor and a duable cable jacket is ultra flexide to maximize mobility
- This Balanced Mic cable designed for equipments with 3-pin XLR connectors such as SM Microphone, MXL Microphones, Behringer, shotgun microphones, studio harmonizers, mixing boards, patch bays, preamps, speaker systems
- Ideal for microphone cable extension, Mic Mixer, Recording Studio, Podcast, Speaker System

Model : ATZ XLR-MF-xxM

Description : XLR 3-pin Male to Female Microphone cable (xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Specifications:


| Cable Type | XLR Cable |
|-----------------------------|-------------------------------|
| Num of Conductor | 2 C |
| Wire Gauge | 22 AWG |
| Connector Type 1 | 3-pin XLR |
| Connector Type 2 | 3-pin XLR |
| Connector Plating | Nickel Plated Brass Connector |
| Connetor Gender | Male to Female |
| Conductor Material | Tinned Copper (TC) |
| Conductor Construction | 17 / 0.16 ± 0.008 mm |
| Conductor Material | Tinsel Wire |
| Conductor Construction | 2 / 0.24 ± 0.008 mm |
| Conductor Stranded Diameter | 0.98mm |
| Insulation | Twisted Pair 60 + / - 2mm |
| Insulation Material | HDPE |
| Insulation Thickness | 0.22mm |
| Insulation Diameter | 1.4 ± 0.008 mm |
| Filler Material | Cotton Thread |
| Drain Material | Tinned Copper (TC) |
| Drain Construction | 17 / 0.16 ± 0.008 mm |
| Tape Material | Aluminum Mylar Tape |
| Tape Over Lap | 25% Min |
| Spirally Material | Tinned Copper (TC) |
| Spirally Construction | 60 / 0.10 ± 0.008 mm |
| Jacket | PVC |
| Jacket Thickness | 0.6 mm |
| Jacket OD | 4.3 ± 0.1 mm |
| Colour | Black |

Model : ATZ XLR-MF-xxM

Description : XLR 3-pin Male to Female Microphone cable (xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Cable Configuration:

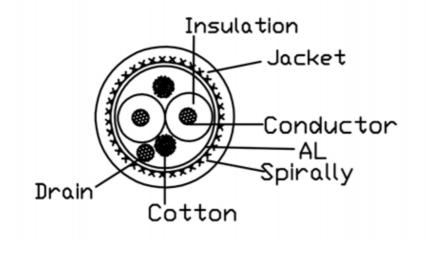

Product Picture:





Package Contents :

1 x ATZ XLR 3-pin Male to Female Microphone cable

Warranty: 3 Years

Warranty is effective from the date of original delivery. This warranty shall be void if a serial number has been removed from the product.

pg. 5

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice. Copyright ATZ