

Model : ATZ XLR-MM-xxM

Description : XLR 3-pin Male to Male Microphone cable

(xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



These stereo ATZ balance XLR cable assemblies are ideal for use in professional audio, video and stage lighting equipment. They are used to carry and deliver a high quality audio signal to the microphone or other output music gear, so that the final audio sound will have less unwanted noise from outside electrical interference.

For audio professionals and enthusiasts seeking reliable, high-quality sound transmission as it build to deliver superior audio performance, with a focus on durability and reliability.

These XLR socket to XLR plug cable assemblies have 3 pins as standard and a circular connector. Pin 1 is connected to the shielding of the cable to provide a ground, whereas pins 2 and 3 carry the actual sound itself.

This XLR cable has a XLR male connector one end and a XLR male connector on the other end.

Model : ATZ XLR-MM-xxM

Description : XLR 3-pin Male to Male Microphone cable

(xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Features:

- Connect balance line outputs to balance line inputs for optimum audio performance
- Shield surrounding centre conductors for maximum EMI / RFI noise rejection making the sound quality undisturbed by external signals.
- Professional Nickel-Plated Pins, anti-corrosion and oxidation resistance. With multiple plug-and-pull tests, this mic cable is perfect for your daily prolong usage
- All-copper conductors with inner copper spiral shielding to reduce noise interference providing clear transmission
- Multi-stranded copper center conductor and a durable cable jacket is ultra flexible to maximize mobility
- This Balanced Mic cable designed for equipments with 3-pin XLR connectors such as SM Microphone, MXL Microphones, Behringer, shotgun microphones, studio harmonizers, mixing boards, patch bays, preamps, speaker systems
- Ideal for microphone cable extension, Mic Mixer, Recording Studio, Podcast, Speaker System

Model : ATZ XLR-MM-xxM

Description : XLR 3-pin Male to Male Microphone cable

(xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Specifications:


Cable Type	XLR Cable
Num of Conductor	2 C
Wire Gauge	22 AWG
Connector Type 1	3-pin XLR
Connector Type 2	3-pin XLR
Connector Plating	Nickel Plated Brass Connector
Connector Gender	Male to Male
Conductor Material	Tinned Copper (TC)
Conductor Construction	17 / 0.16 ± 0.008 mm
Conductor Material	Tinsel Wire
Conductor Construction	2 / 0.24 ± 0.008 mm
Conductor Stranded Diameter	0.98mm
Insulation	Twisted Pair 60 + / - 2mm
Insulation Material	HDPE
Insulation Thickness	0.22mm
Insulation Diameter	1.4 ± 0.008 mm
Filler Material	Cotton Thread
Drain Material	Tinned Copper (TC)
Drain Construction	17 / 0.16 ± 0.008 mm
Tape Material	Aluminum Mylar Tape
Tape Over Lap	25% Min
Spirally Material	Tinned Copper (TC)
Spirally Construction	60 / 0.10 ± 0.008 mm
Jacket	PVC
Jacket Thickness	0.6 mm
Jacket OD	4.3 ± 0.1 mm
Colour	Black

Model : ATZ XLR-MM-xxM

Description : XLR 3-pin Male to Male Microphone cable

(xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)

Cable Configuration:

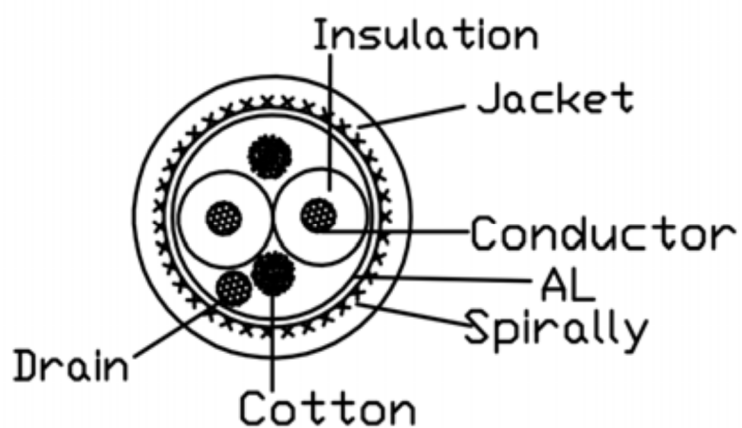

Product Picture:



Model : ATZ XLR-MM-xxM

Description : XLR 3-pin Male to Male Microphone cable

(xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Model : ATZ XLR-MM-xxM

Description : XLR 3-pin Male to Male Microphone cable

(xx = Length : 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Package Contents :

1 x ATZ XLR 3-pin Male to Male Microphone cable

Warranty: 3 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.