

Model : ATZ H15-8K2EA-AX

Description : HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter



Model : ATZ H15-8K2EA-AX

Description : HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter



This 48Gbps eARC Audio Adapter is designed for de-embedding audio signals from an HDMI source or TV with ARC/eARC, and outputting HDMI audio, digital S/PDIF audio or analog audio to AV Receiver.

It supports data rates up to 48Gbps complying with HDMI 2.1 and HDCP 2.3 requirements. It includes several features for ease of integration, such as EDID management and cable equalization.

It provides an easy solution for HDMI installations to send audio signals to a soundbar, amplifier or any 5.1/2.0CH sound system. CEC control from TV to the source, amplifier or soundbar is also supported

Features:

- HDCP 2.3 compliant
- Support 48Gbps video bandwidth and video resolution up to 8K@60Hz 4:2:0 12bit and 4K@120Hz 4:4:4 12bit, as specified in HDMI 2.1
- VRR, ALLM, QMS, QFT, SBTM are supported
- Support HDR, HDR10, HDR10+, Dolby Vision, HLG pass-through
- Support LPCM 7.1CH, Dolby TrueHD, Atmos and DTS-HD Master, DTS:X Audio pass-through
- HDMI input source and TV eARC/ARC audio are de-embedded to S/PDIF, L/R and HDMI audio to output
- HDMI input source is de-embedded to any eARC/ARC soundbar to output
- Support full audio up to Dolby Atmos/DTS:x from eARC TV to SONOS ARC & Beam or any eARC soundbar
- Support CEC control from TV to the source
- Support CEC volume control from TV to any eARC sound system
- Advanced EDID management

Model : ATZ H15-8K2EA-AX

Description : HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter



Specifications:


Technical:				
HDMI Compliance	HDMI 2.1			
HDCP Compliance	HDCP 2.3			
Video Bandwidth	48Gbps FRL and 18Gbps TMDS			
Video Resolution	Up to 8K@60Hz 4:2:0 12bit, 4K@120Hz 4:4:4 12bit			
Color Depth	8/10/12bit			
Color Space	RGB, YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0			
HDR	HDR, HDR10, HDR10+, Dolby Vision, HLG			
Audio Formats	HDMI input/output: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DSD DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X eARC AUDIO OUT: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DSD DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X Amp AUDIO OUT: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DSD DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X Audio de-embedding output: Optical: PCM 2.0CH/Dolby/DTS 5.1CH L/R: PCM 2.0CH			
ESD Protection	IEC 61000-4-2: ±8kV (Air-gap discharge) & ±4kV (Contact discharge)			
Connection:				
Input ports	1 × Source IN [HDMI Type A, 19-pin female]			
Output ports	1 × TV(eARC) OUT [HDMI Type A, 19-pin female] 1 × Soundbar eARC OUT [HDMI Type A, 19-pin female] 1 × Amp AUDIO OUT [HDMI Type A, 19-pin female] 1 × OPTICAL [S/PDIF] 1 × L/R [3.5mm Stereo Mini-jack]			
Control ports	1 × SERVICE [Micro USB, Update port]			
Mechanical:				
Housing	Metal Enclosure			
Color	Black			
Dimensions	145mm [W] × 68mm [D] × 18mm [H]			
Weight	262g			
Power Supply	Input: AC 100-240V 50/60Hz, Output: DC 5V/2A (US/EU standards, CE/FCC/UL certified)			
Power Consumption	5.2W (Max)			
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F			
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F			
Relative Humidity	20 - 90% RH (no-condensing)			
Recommended HDMI Cable				
Video Resolution	8K	4K60	4K24	1080P
HDMI Cable Type	Ultra HDMI 2.1 cable	HDMI v2.0 cable	HDMI v2.0 cable	HDMI v2.0 cable
HDMI Cable Length (HDMI IN / OUT)	2m/6.6ft	8m/26ft	12m/39ft	15m/49ft
The use of "ATZ Premium High Speed HDMI" cable is highly recommended				

Model : ATZ H15-8K2EA-AX


Description : HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter

Operation Controls and Functions:

Front Panel

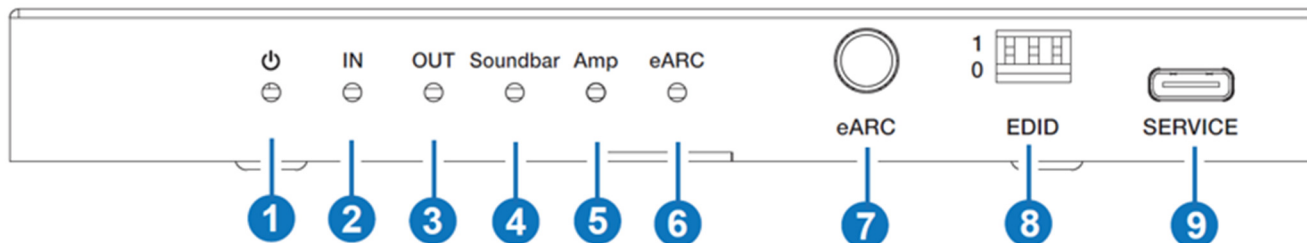

Rear Panel

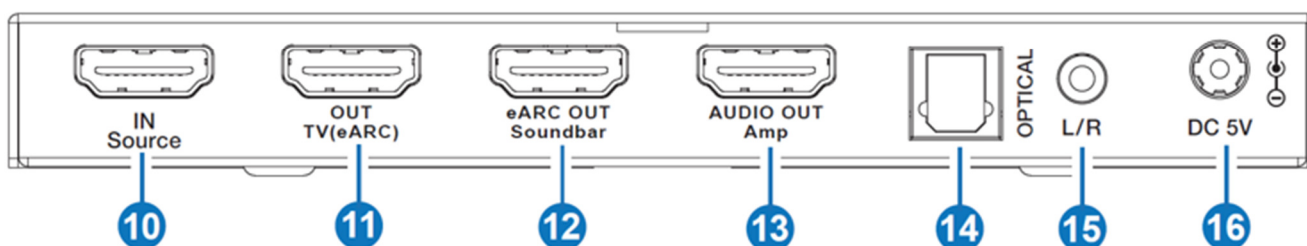

No.	Name	Function Description
1	Power LED	The red LED is on when the device is working.
2	IN LED	The green LED will be on when the input source signal is detected.
3	OUT LED	The green LED will be on, when the HDMI OUT port connects a display device and outputs signal.
4	Soundbar LED	The green LED will be on when a soundbar is connected properly.
5	Amp LED	The green LED will be on when an amplifier is connected properly.
6	eARC LED	<ul style="list-style-type: none">▪ On: The eARC/ARC mode is enabled. CEC communication and eARC is working properly.▪ Flashing: The eARC/ARC mode is enabled. CEC communication and eARC is not working properly.▪ Off: The eARC mode is disabled.
7	eARC button	Press this button to enable or disable the eARC/ARC mode.
8	EDID DIP switch	Use the DIP switch to set EDID. [DIP]=111: Copy OUT port sink EDID (as factory default) [DIP]=110: Copy video EDID of sink and audio EDID of Soundbar [DIP]=101: FRL12G_8K_HDR, 2.0CH [DIP]=100: FRL12G_8K_HDR, 5.1CH [DIP]=011: FRL12G_8K_HDR, 7.1CH [DIP]=010: FRL10G_8K_HDR, 2.0CH [DIP]=001: FRL10G_8K_HDR, 5.1CH [DIP]=000: FRL10G_8K_HDR, 7.1CH
9	SERVICE	Used for firmware update and serial commands control.

Model : ATZ H15-8K2EA-AX

Description : HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter




10	Source IN	HDMI signal input port, connected to HDMI source device such as 8K PC, DVD or PS5 with an HDMI cable.output which follows the OUT 1 output.
11	TV(eARC) OUT	HDMI signal output port, connected to TV (eARC/ARC) with an HDMI cable. It can be used as an eARC/ARC audio channel when the eARC/ARC mode is enabled.
12	Soundbar eARC OUT	HDMI audio output port, connected to a soundbar (eARC/ARC).
13	Amp AUDIO OUT	HDMI audio output port, connected to an amplifier.
14	OPTICAL	Optical fiber audio output port.
15	L/R	Analog audio output port.
16	DC 5V	DC 5V/2A Power input port.

Model : ATZ H15-8K2EA-AX

Description : HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter


Product Pictures:

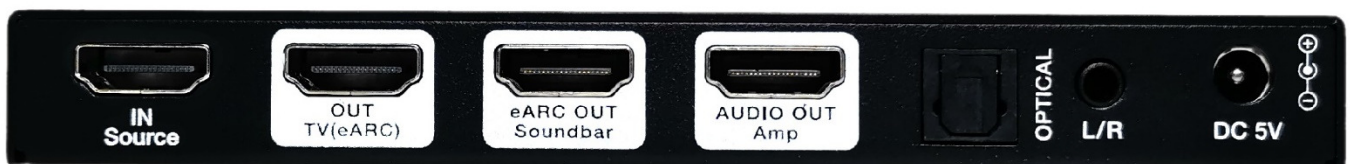

Model : ATZ H15-8K2EA-AX

Description : HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter

Application Diagram:

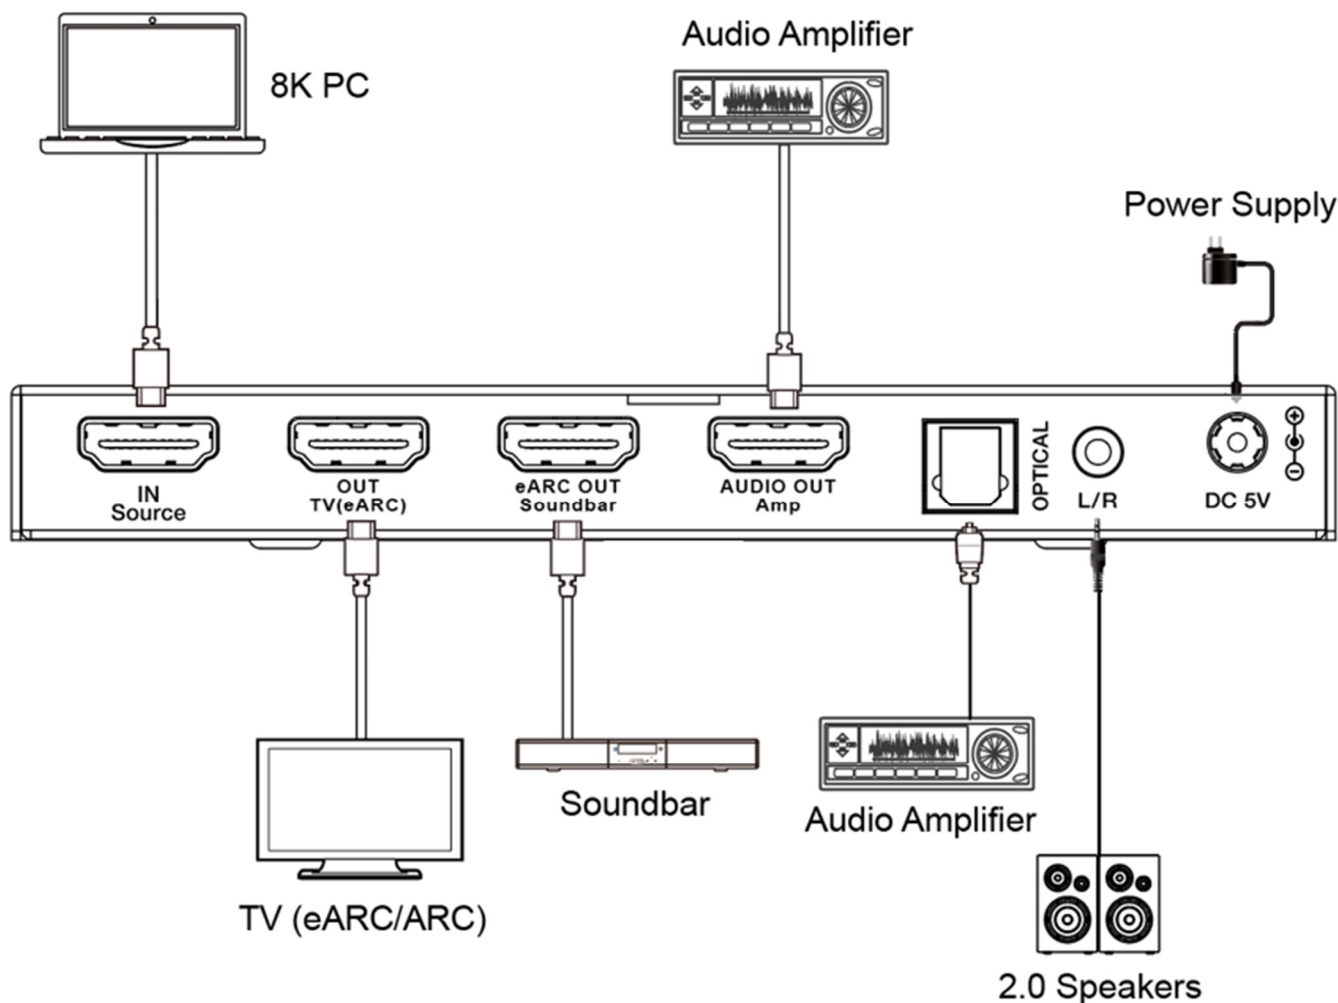

Note: When eARC/ARC mode is enabled, the audio signal of Amplifier/Soundbar is the audio returned from the TV. When eARC/ARC mode is disabled, the audio signal of Amplifier/Soundbar is from the HDMI input source.

Package Contents :

- 1 × HDMI v2.1 48Gbps 8K@60 eARC Audio Adapter
- 1 × 5V/2A Multinational Power Supply
- 1 × User Manual

Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.