

Model : ATZ MO6.35MM- xxM

Description : 6.35mm (1/4") Mono Male to Male cable

(xx = Length: 1m / 2m / 3m / 5m / 10m / 15m / 20m / 25m / 30m)



The 6.35mm (1/4") Mono Male to Male cable - also known as a TS (Tip-Sleeve) cable - is a high-fidelity audio interconnect designed for professional-grade mono signal transmission.

Used to connect instrument cable to mono unbalanced-cable gear audio/musical device/equipment with 6.35mm audio interface.

Ideal for professional audio over long distance and in noisy environment.

Versatile design for use in professional audio, theatre, studio, stage, and broadcast environments.

This cable ensures robust connectivity between devices such as electric guitar, bass, mixers, audio interfaces, stage boxes/monitors, amplifiers, karaoke, home theatres and musical instruments.

Model : ATZ MO6.35MM- xxM

Description : 6.35mm (1/4") Mono Male to Male cable

(xx = Length: 1m / 2m / 3m / 5m / 10m / 15m / 20m / 25m / 30m)



Features:

- Support mono unbalance setup for optimum audio performance
 - Support long cable run and noise rejection
 - Sends mono signal on Tip and Sleeve but with opposite polarity, allowing devices to cancel out noise
 - Shield surrounding centre conductors for maximum EMI / RFI noise rejection making the sound quality undisturbed by external signals
 - Gold plated contact with inner copper spiral shielding to reduce noise interference providing clear transmission and reduce loss of sound quality
 - Professional Gold-Plated Pins, anti-corrosion and oxidation resistance. With multiple plug-and-pull tests, this cable is perfect for your daily prolong usage
 - Premium materials and construction results in clear, high-definition sound output
 - Heavy-duty cable withstands stepping, heavy pressure, rodent chewing, and other external factors while continuing to function normally
 - Robust construction provides excellent flexibility and protection over long distance against harsh conditions and wear
-

Model : ATZ MO6.35MM- xxM

Description : 6.35mm (1/4") Mono Male to Male cable

(xx = Length: 1m / 2m / 3m / 5m / 10m / 15m / 20m / 25m / 30m)



Specifications:


Connector Type 1	6.35mm (1/4") TS
Connector Type 2	6.35mm (1/4") TS
Signal Type	Mono Unbalance
Connector Plating	Gold-plated Connector
Connector Gender	Male to Male
Conductor Material	Tinned Copper (TC)
Conductor Construction	17 / 0.16 ± 0.008 mm
Conductor Material	Tinsel Wire
Conductor Construction	2 / 0.24 ± 0.008 mm
Conductor Stranded Diameter	0.98mm
Num of Conductor	2 C
Wire Gauge	22 AWG
Insulation	Twisted Pair 60 + / - 2mm
Insulation Material	HDPE
Insulation Thickness	0.22mm
Insulation Diameter	1.4 ± 0.008 mm
Filler Material	Cotton Thread
Drain Material	Tinned Copper (TC)
Drain Construction	17 / 0.16 ± 0.008 mm
Tape Material	Aluminium Mylar Tape
Tape Over Lap	25% Min
Spirally Material	Tinned Copper (TC)
Spirally Construction	60 / 0.10 ± 0.008 mm
Jacket	PVC
Jacket Thickness	0.6 mm
Jacket OD	6.0 ± 0.15 mm
Colour	Black

Model : ATZ MO6.35MM- xxM

Description : 6.35mm (1/4") Mono Male to Male cable

(xx = Length: 1m / 2m / 3m / 5m / 10m / 15m / 20m / 25m / 30m)

Cable Configuration:

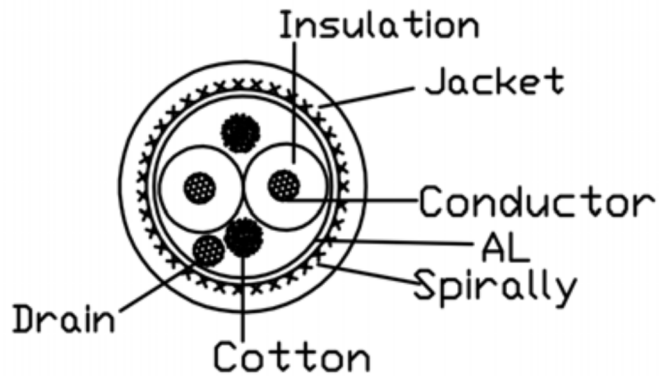

Mono Unbalance wire connection



Product Picture:




Model : ATZ MO6.35MM- xxM

Description : 6.35mm (1/4") Mono Male to Male cable

(xx = Length: 1m / 2m / 3m / 5m / 10m / 15m / 20m / 25m / 30m)

Application Diagram:

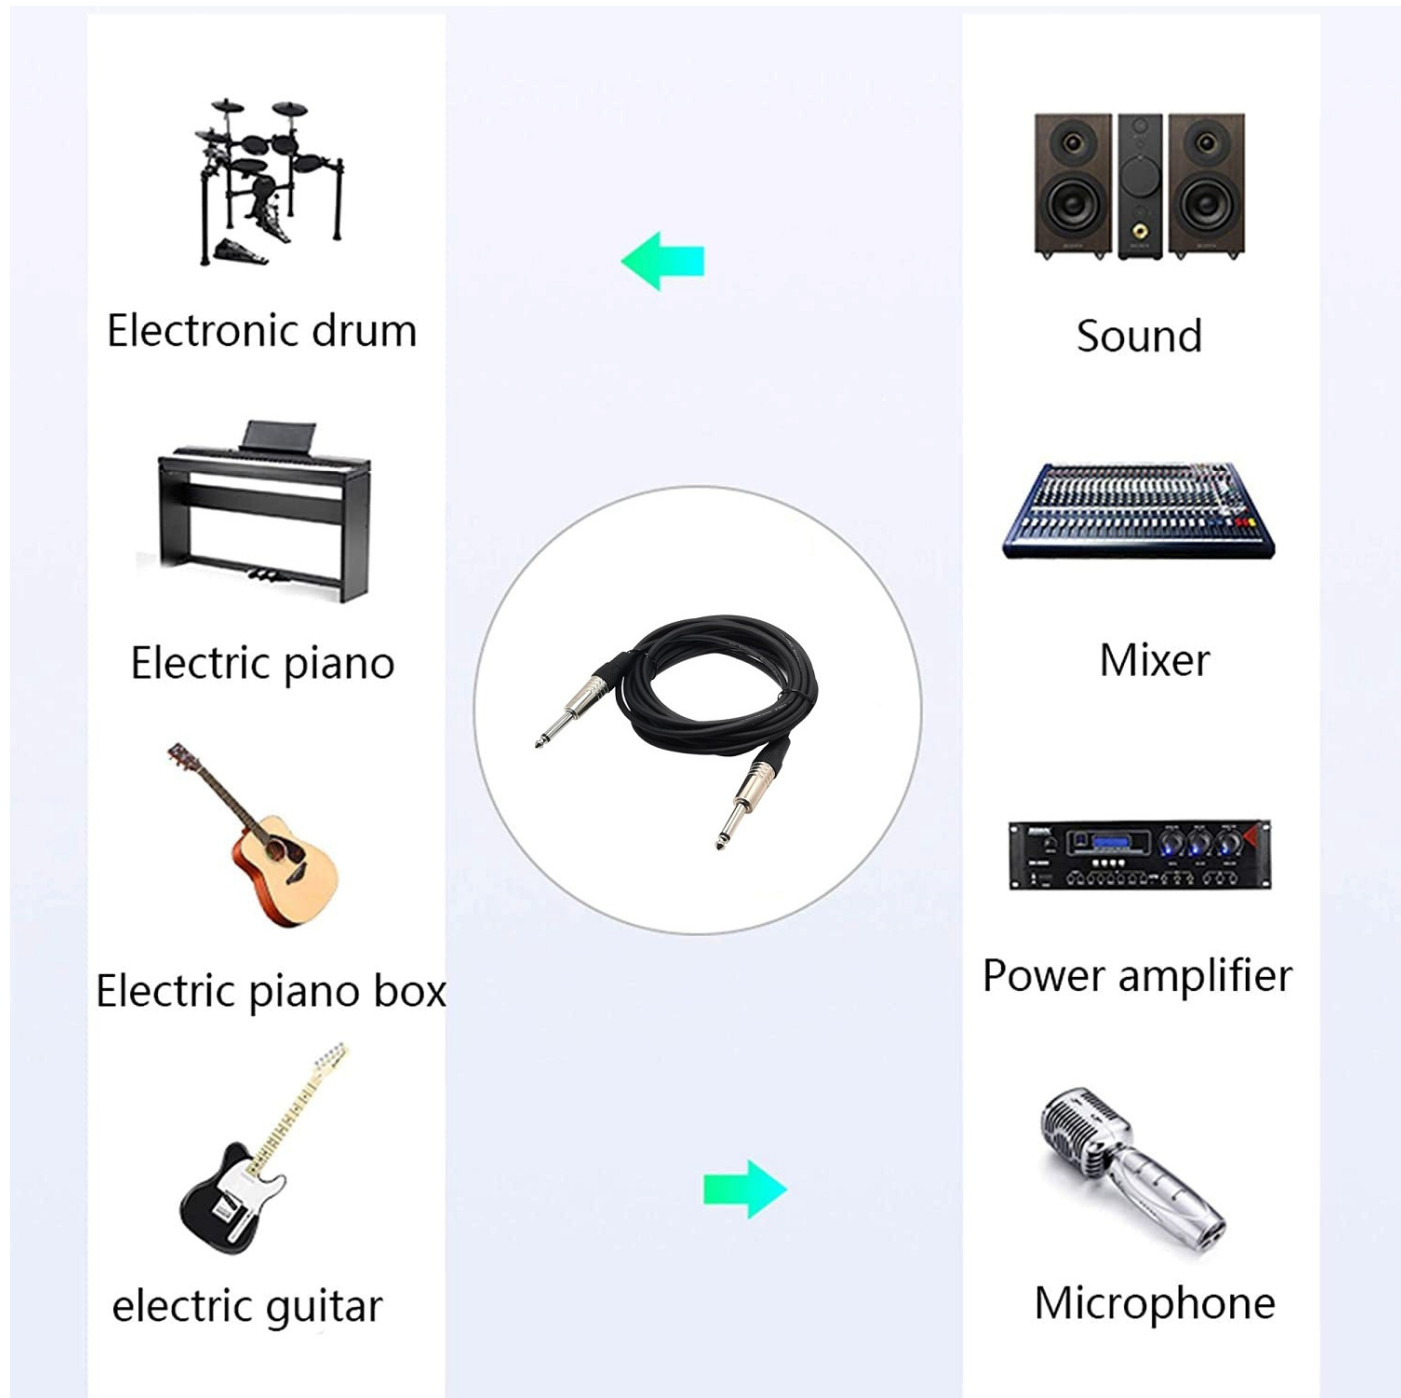

Package Contents :

1 x ATZ 6.35mm (1/4") Mono Male to Male cable (1m / 2m / 3m / 5m / 10m / 15m / 20m / 25m / 30m)

Warranty: 3 Years

Warranty is effective from the date of original delivery.