

Model : ATZ ST6.35MM-XXM

Description : 6.35mm (1/4") Stereo Male to Male cable

(XX = Length: 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



The 6.35mm (1/4") Stereo Male to Male cable - also known as a TRS (Tip-Ring-Sleeve) cable - is a high-fidelity audio interconnect designed for professional-grade stereo signal transmission.

Commonly used in consumer and semi-professional studio, stage, and high-fidelity audio setups, with 6.35mm audio interface.

This cable ensures robust connectivity between devices such as headphones, amplifiers, microphones, mixers, audio interfaces, stage boxes, digital recorders, studio monitors, synthesizers, karaoke, home theatres, and musical instruments. It is also used to link keyboards, synthesizers, and effects processors.

Model : ATZ ST6.35MM-XXM

Description : 6.35mm (1/4") Stereo Male to Male cable

(XX = Length: 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Features:

- Support stereo balance setup for optimum audio performance
- Delivery two channels over single audio channel sources
- Support dual audio change where it carries both left and right stereo signals simultaneously
- Shield surrounding centre conductors for maximum EMI / RFI noise rejection making the sound quality undisturbed by external signals.
- Gold plated contact with inner copper spiral shielding to reduce noise interference providing clear transmission and reduce loss of sound quality
- Professional Gold-Plated Pins, anti-corrosion and oxidation resistance. With multiple plug-and-pull tests, this cable is perfect for your daily prolong usage
- Premium materials and construction results in clear, high-definition sound output
- Heavy-duty cable withstands stepping, heavy pressure, rodent chewing, and other external factors while continuing to function normally
- Robust construction provides excellent flexibility and protection over long distance against harsh conditions and wear

Model : ATZ ST6.35MM-XXM

Description : 6.35mm (1/4") Stereo Male to Male cable

(XX = Length: 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Specifications:

Connector Type 1	6.35mm (1/4") TRS
Connector Type 2	6.35mm (1/4") TRS
Signal Type	Stereo Balance
Connector Plating	Gold-plated Connector
Connector Gender	Male to Male
Conductor Material	Tinned Copper (TC)
Conductor Construction	17 / 0.16 ± 0.008 mm
Conductor Material	Tinsel Wire
Conductor Construction	2 / 0.24 ± 0.008 mm
Conductor Stranded Diameter	0.98mm
Num of Conductor	2 C
Wire Gauge	22 AWG
Insulation	Twisted Pair 60 + / - 2mm
Insulation Material	HDPE
Insulation Thickness	0.22mm
Insulation Diameter	1.4 ± 0.008 mm
Filler Material	Cotton Thread
Drain Material	Tinned Copper (TC)
Drain Construction	17 / 0.16 ± 0.008 mm
Tape Material	Aluminium Mylar Tape
Tape Over Lap	25% Min
Spirally Material	Tinned Copper (TC)
Spirally Construction	60 / 0.10 ± 0.008 mm
Jacket	PVC
Jacket Thickness	0.6 mm
Jacket OD	6.0 ± 0.15 mm
Colour	Black


Model : ATZ ST6.35MM-XXM

Description : 6.35mm (1/4") Stereo Male to Male cable


(XX = Length: 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)




Cable Configuration:

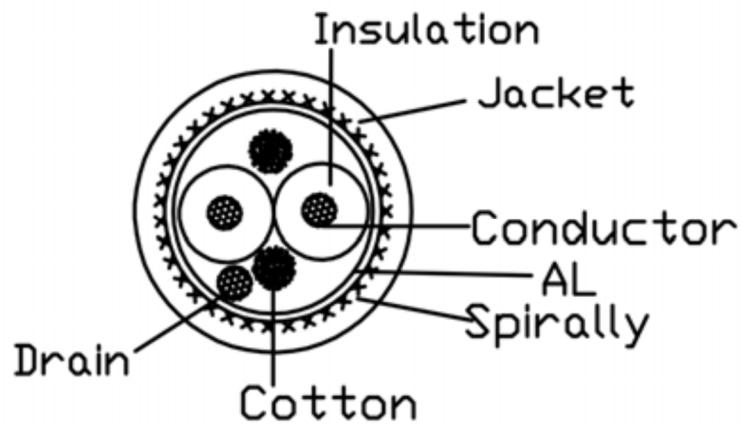

Stereo Balance wire connection (Default)



Stereo Unbalance wire connection



Note:

1. Default wiring setup will be in stereo balance.
2. Do let us know again if you need them to be in 6.35mm Stereo Unbalance cable wiring.

Model : ATZ ST6.35MM-XXM

Description : 6.35mm (1/4") Stereo Male to Male cable

(XX = Length: 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Product Picture:



Model : ATZ ST6.35MM-XXM

Description : 6.35mm (1/4") Stereo Male to Male cable

(XX = Length: 1m/2m/3m/5m/10m/15m/20m/25m/30m/40m/50m)



Application Diagram:

Apply To A Wide Range Of Play More

Widely used for connections between devices with 6.35mm interface



Package Contents :

1 x ATZ 6.35mm (1/4") Stereo Male to Male cable (1m / 2m / 3m / 5m / 10m / 15m / 20m / 25m / 30m / 40m / 50m)

Warranty: 3 Years

Warranty is effective from the date of original delivery.