

Model : ATZ KC18HL

Description: 8-port HDMI USB 2.0 KVM Switch c/w 8x KVM/USB cables



Brief Introduction:

This HDMI KVM switch support a set of keyboard, mouse and monitor to control 8 computers. The KVM switch can be contolled via hot-key and panel button switch without need for software. It also supports auot-scanning and can boot multiple mainframes at the same time, with UHD support in 4k*2k resolution.

Features:

- No software required, PC selection via Push Buttons or Hot Keys
- USB2.0 port, with USB hub to connect to any USB2.0 devices.
- Support OS: DOS, win3X, win98/ 98E/ 2000/ ME/ 2003/ 2008/ XP/ IOS, Mac, win7, win8, win10, winNT, Netware, Unix, linux.
- Superior image quality, support resolution up to 4k*2k@30Hz, ba ndwidth: 2.55G
- LED display for monitoring status
- Support Microsoft intelli-mouse, Logitech Net Mouse etc.

Model : ATZ KC18HL

Description: 8-port HDMI USB 2.0 KVM Switch c/w 8x KVM/USB cables



- Support hot-swapping. No need to turn off KVM switch and PC to play or plug the connected PC.
- Auto Scan Mode for monitoring all computers and HDMI devices

Specifications:


Computer Connections	8		
Port Selection	Hotkeys, push buttons		
Connectors	Console Ports	Keyboard/ Mouse	2 x USB Type A Female
		Video	1 x HDMI Female
	KVM Ports	Keyboard	8 x USB Type B
		Mouse	
		Video	8 x HDMI Female
USB Hub	USB 2.0 devices	2 x USB Type A Female	
LEDs	Selected	8	
Cable Length	Computers	2m	
Emulation	Keyboard/Mouse		USB
Video	4K*2K @ 30Hz		
Scan Interval	8 seconds default		
physical properties	Housing		Metal
	Size		43*17*4.5cm
	Weight		4.5 kg
Carton Lot	4pcs		

Model : ATZ KC18HL

Description: 8-port HDMI USB 2.0 KVM Switch c/w 8x KVM/USB cables



Product Diagram:

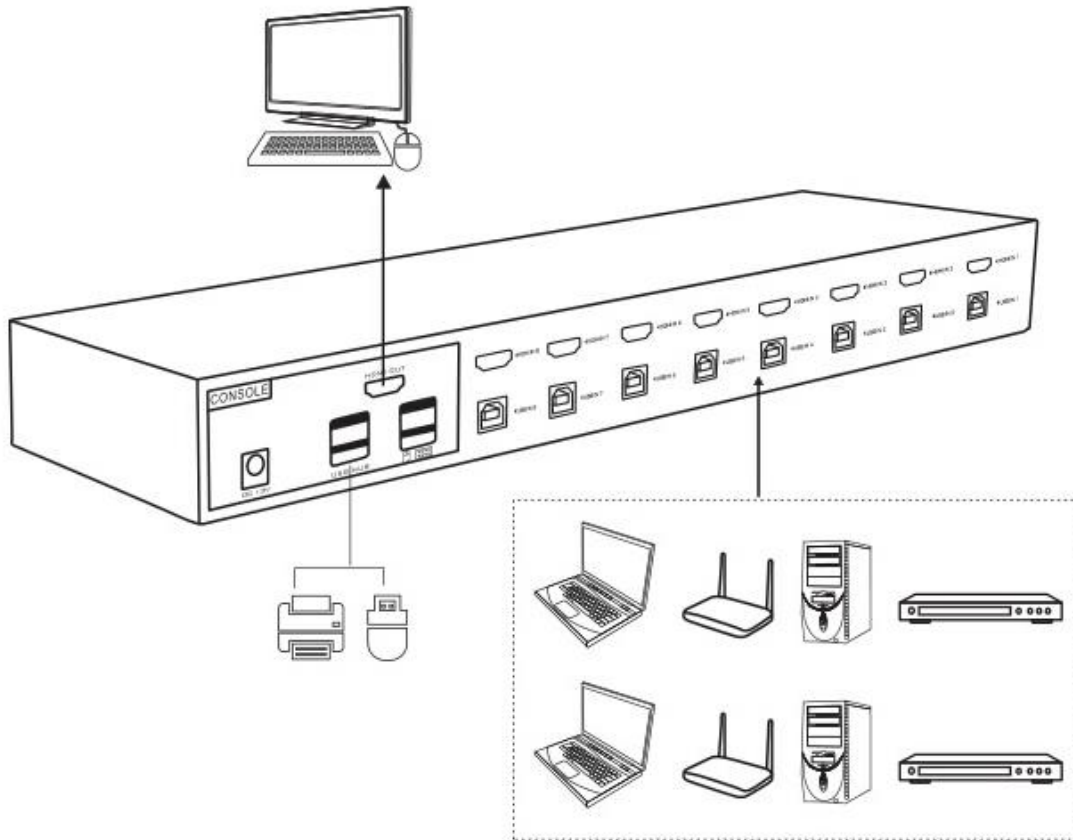

Package contents:

- 1x User Manual
- 1x Power adapter 12V 1A
- 1x rackmount bracket
- 8x HDMI cable (2m)
- 8x USB cable (2m)

Warranty: 3 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.

Model : ATZ KC18HL

Description: 8-port HDMI USB 2.0 KVM Switch c/w 8x KVM/USB cables



HOTKEYS Operation:

Hot-key command:

[HOME] + [HOME] Mode (default mode)

[HOME] + [HOME] + Caps Enter hotkey Caps mode

[HOME] + [HOME] + Scroll Enter hotkey Caps mode

[HOME] + [HOME] + Num Enter hotkey Caps mode

Default Mode Command

[HOME] + [HOME] + 1、 2.... Switch to corresponding port

[HOME] + [HOME] + → or ↓ Switch to the next port

[HOME] + [HOME] + ← or ↑ Switch to the previous port

[HOME] + [HOME] + B On/off buzzer sound

[HOME] + [HOME] + S Auto scan

[HOME] + [HOME] + l + number + Enter Setting scan time

[HOME] + [HOME] + g + 1/2/3/4/5/6 HDMI video gain adjustment

Model : ATZ KC18HL

Description: 8-port HDMI USB 2.0 KVM Switch c/w 8x KVM/USB cables



If you want to use Caps mode, please press [HOME]+[HOME]+Caps at first, and then you will enter the Caps mode.

Caps Mode Command

[Caps]+[Caps] +1、 2.... Switch to corresponding port

[Caps]+[Caps] + →or↓ Switch to the next port

[Caps]+[Caps] + ←or↑ Switch to the previous port

[Caps]+[Caps] + B On/off buzzer sound

[Caps]+[Caps] + S Auto scan

[Caps]+[Caps] + I +number +Enter Setting scan
time

If you want to back to default mode, please press [Caps]+[Caps]+HOME, then you get home mode, and so on.