

**Description:** 4 Ports USB2.0 Cat.5E/6 Extender, up to 100 Meter



ATZ UCE204 is an Extender to extend a USB source up to 100m using a single Cat.5E/6 cable. This product supports USB 2.0 with data rates up to 480 Mbps in addition to being backward compatible with USB 1.1.

The Receiver Unit allows the connections of up to 4 USB devices, providing access to printers, scanners, cameras, ext storage media, digital signage, and automated control systems.



**Description:** 4 Ports USB2.0 Cat.5E/6 Extender, up to 100 Meter

#### Features:


- Single CAT5E/6 cable, support 4 ports HUB Output
- Using CAT6 cable support USB2.0 device transmit up to 60 meters.
- Using CAT6 cable can make the low-speed devices transmit keyboard, mouse etc. device extend up to 100 meters.
- Compliant with USB 2.0 & USB 1.1.
- Supports major operating systems: Windows, Mac OS X, Linux etc.
- Supports High speed-speed(480Mbps) and low speed(1.5Mbps) USB devices.
- Plug and Play, no driver installation needed.
- Support hot swap function, plug and play.
- No software installation.
- High-grade metal shell design, perfect hand feeling.
- Strict control of the raw materials, manufacturing and testing procedure under the ISO9001 standard.

### **Specifications:**

Į.	1x USB-A/F
USB output interface	4x USB-A/F
Compatible USB version	USB 1.1 and USB 2.0
Wiring method	IEEE-568B
Maximum working current	≤100m AWG23 CAT6 standard cable
Input cable distance	≤5m AWG24 USB standard cable
output cable distance	≤5m AWG24 USB standard cable
Supports data transfer rates	480Mbps
Power Adapter Specifications	AC(50/60HZ): 100V-240V, DC Output: 5V/2A
Operating Temperature range	(-15 to +55°C)
Operating Humidity range	5 to 90% RH (No Condensation)
Sender Dimension (L x W x H)	75X97X29(mm)
Receiver Weight	110g
Sender Dimension (L x W x H)	75X97X29(mm)
Receiver Weight	130g



Description: 4 Ports USB2.0 Cat.5E/6 Extender, up to 100 Meter

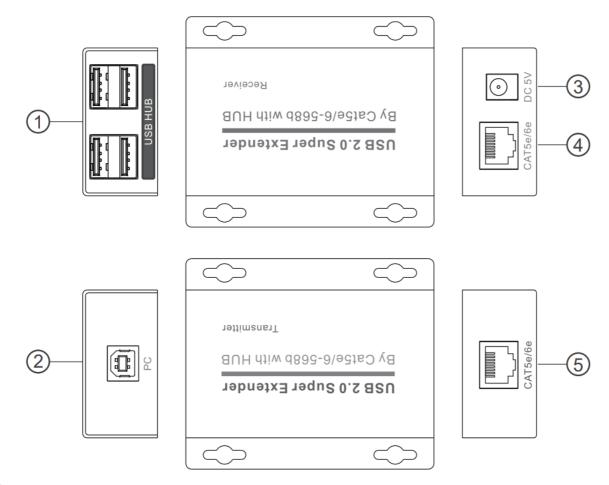

- USB OUT-----4xUSB Signal output interface; Used to connect the keyboard, the mouse, the handwriting board, and the game controller, etc.USB equipment;
- 2 USB IN-----1xUSB Signal input interface; Connect the computer and DVR
- 3 DC 5V-----Power interface; Support DC5V/2A input;
- (4) RJ45-----Network interface; Connect CAT5E/CAT6 cable;
- (5) **RJ45**-----Network interface; Connect CAT5E/CAT6 cable;

# Package Includes:


1x USB2.0 Transmitter 1x USB2.0 Receiver

1x 5V Power adapter



Description: 4 Ports USB2.0 Cat.5E/6 Extender, up to 100 Meter

# **Product Diagram:**

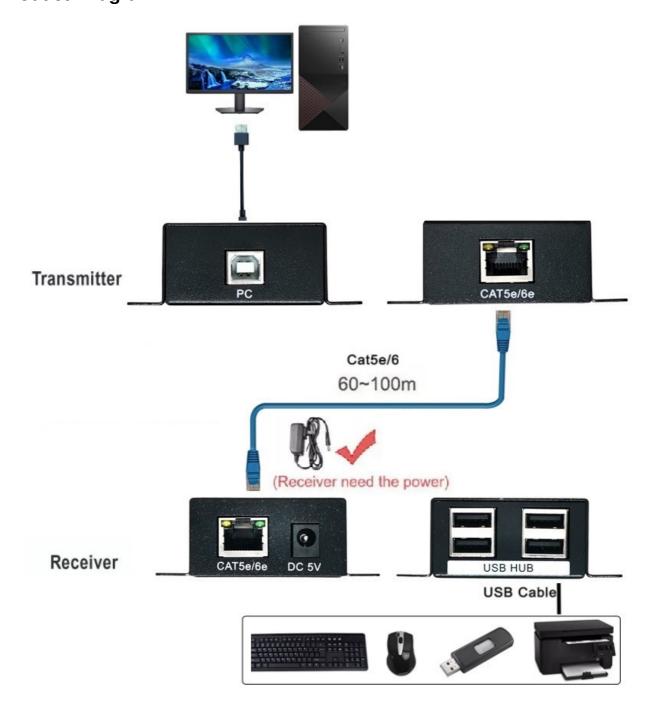

# Warranty: 2 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.