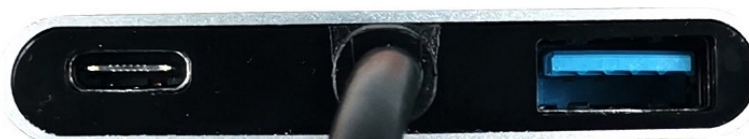**Model** : ATZ UC41-234
Description: 4-in-1 USB-C to Dual 4K HDMI+USB3.0+USB-C PD Charging

USB Type-C

2x HDMI

USB-C PD + USB3.0

Model   **:** ATZ UC41-234
Description: 4-in-1 USB-C to Dual 4K HDMI+USB3.0+USB-C PD Charging

USB C to Dual HDMI Adapter connects the devices with a USB-C interface port to two HDMI ports, a USB 3.0 port, a PD Charging port. Four ports can work at the same time. Designed for devices equipped with Type-C port or Thunderbolt 3 port that support video and audio output Mode.

Features:

- High Speed USB 3.0 Transfer up to 5Gbps, work for USB flash disk, mouse, keyboard and other USB A 2.0/USB A 3.0 devices. Easy to transfer a HD movies in short time. Meanwhile Type-C charging quickly output up to 60W, avoid running out of power during use.

- Plug and Play - This multiport adapter don't require any software drivers, or complicated installation process. Portable and premium aluminium design provides better heat dissipation. Special internal PCB anti-jamming design, no need to worry interrupt WiFi signal any more.

- Maximum 4K @ 60Hz output - when only one port is used, the maximum resolution is 3840x2160 @ 60Hz. To ensure 4K/60Hz performance, please make sure to use HDMI 2.0/DP 1.2 cable (or better), it also depends on the definition of the monitor. Support HDCP 2.2. Supports mirroring and extension modes of Mac OS, Win OS and Chrome OS

- Video and audio - transmit high-quality video and audio for presentations, meetings, workshops, training or games. You must confirm that your host device supports video output or DP Alt Mode. You may need to change the "Default Audio Output Device" setting in System Preferences to transmit sound

- Humanized design - non-slip connector, easy to plug and unplug. The precise USB-C plug can be tightly inserted into your device for better signal transmission. Integrated aluminium alloy shell with better heat dissipation effect

- Wide compatibility - MAC OS, Windows, Android, Linux system USB C Device. 2019/2018/2017/2016/2015 new MacBook Pro 13/15/16, new MacBook Air, MacBook 12, new iPad Pro 11/12.9 (2018 onward), new iMac/Pro, Dell XPS, Surface Book 2/Go, Samsung Galaxy S8 / S9 / S10 / Plus / Note 8/9/10, Pixelbook, Chromebook, Intel NUC, HP, Acer, Lenovo and other products with USB-C DP ALT mode.

- Dual 4K displays - enables full-featured Windows OS devices to display two split screens through an HDMI and an extended DisplayPort display (TV, projector, etc.), with a resolution of up to 3840x2160p @ 30Hz. (Important note: On Mac devices, due to the limitations of Mac OS, two monitors can only display the same screen (mirror screen)

Model   : ATZ UC41-234
Description: 4-in-1 USB-C to Dual 4K HDMI+USB3.0+USB-C PD Charging

Specifications:

Input Signal	USB 3.1 Type C Male/ Thunderbolt™ 3 Male
Output Signal	HDMI/USB3.0//USB-C
Input Connector	1x USB 3.1 Type C Male
Output Connector	2x HDMI 4K@60 1x USB3.0 1x USB-C PD
HDMI Resolution	480i/480p,720p,1080i/1080p,3840x2160 4K@30Hz
USB-C Power Delivery	PD3.0 20V 3A@60W
USB3.0	Support 5Gb/s data speed transmission
Operating Temperature	-20℃ to +65℃
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10℃ to +80℃
Storage Humidity	5% to 90 % RH (no condensation)
Housing	Aluminium Alloy
Colour	Space Grey
Cable	Triple Shieded
Product dimension	56x48x10mm
Weight	45g
External Power Supply	Not required

System Requirement:

- WindowsOS/ MacOS/ ChromeOS/ Android Devices
- Supports DP Alt Mode over USB-C
- Thunderbolt™ 3 port Compatible

Frequently asked questions:

1) How to switch the Mac device to extended mode?
"Settings" → "Display" → Click the "Mirror display" box to switch to extended mode → Then, you can drag the website/movie window to the far right of the desktop screen until it disappears on the desktop screen and appears on the External monitor screen.

2) How to connect to the extended mode of Windows?
Right-click on the desktop → select display settings → pop up the settings screen to select display → select multi-screen display → expand the desktop (if display 3 is not displayed, please manually select the display → click apply to confirm the setting can be confirmed).

3) What if one of the displays does not display?
Right-click on the desktop> Graphics Settings> Select one or more active displays.

Model : ATZ UC41-234
Description: 4-in-1 USB-C to Dual 4K HDMI+USB3.0+USB-C PD Charging

Laptop Support list:
Apple: 12-inch MacBook, 2016/2017/2018 MacBook Pro, Mac Mini/ 2018 MacBook Air
Huawei: MateBook13, MateBook, MateBook X, MateBook X Pro, MateBook E
Glory: MagicBook
Xiaomi: Air 12.5, 13.3-inch, Pro 15.6-inch, 15.6-inch GTX version, Xiaomi game book, Xiaomi game book 8th generation
HP:Pavilion x2, Spectre 13, EliteBook Folio G1, Envy 13
ASUS:Lingyao 3, U306, U321 series, U4100, ROG series
Dell : XPS13, XPS15
Lenovo : Xiaoxin Air 12 inches, Yoga5 Pro, Yoga900 13 inches, ThinkPad X1 Carbon 2017
Samsung: NoteBook series, GalaxyBook series
Google : ChromeBook Pixels, PixelBook Pen
Razer: Blade Stealth Spirit Blade, Spirit Blade Stealth Edition
Microsoft : Surface Book2, Surface GO

PC Support list:
Apple: 2018 11-inch iPad Pro, 2018 12.9-inch iPad Pro
Huawei: HuaweiM6 10.8 inch, Matepad Pro

Mobile phone Support list:
Samsung: S8, S8+, S9, S9+, S10, S10+, Note 8, Note 9, Samsung Galaxy
Huawei: Mate 30, 30 Pro, 30 RS, Mate 20, Pro Mate 20X, Mate RS, P20/Pro, P30/Pro, P40/P40 Pro/P40 Pro+Mate 10/10 Pro
Glory: Note 10, V20
Microsoft: Microsoft 950XL Microsoft 950
OPPO: R17 Pro
LG: FGF70 (G5), V300L
One Plus: 7 Pro, 7T/7T Pro, 7T Pro McLaren Edition
Awl: Nut R1, Nut Pro 2S
Black Shark: Black Shark 2
ZTE: Tianji 9

Type of Operating Mode on different OS.
- **Mac OS support:**
1: Mirror mode.
2: Extended mode (due to the limitations of MAC OS itself, in extended mode, the images on the two external screens will be the same).

- **Android support.**
1: Mirror mode

- **Windows support.**
1: Mirror mode
2: Extended mode (the images on the two external screens can be the same or different).

Model **:** ATZ UC41-234

Description: 4-in-1 USB-C to Dual 4K HDMI+USB3.0+USB-C PD Charging

---

Package Includes:

1x USB-C 4-in-1 Adapter

Product Diagram:

Support Mirror and
Extend and Split mode

Warranty: 2 Years

Warranty is effective from the date of original delivery.
This warranty shall be void if a serial number has been removed from the product.