

**Model** : ATZ KS18H2

**Description:** 8 ports HDMI2.0/USB2.0+Audio Rackmount KVM Switch  
4K@60Hz c/w 8x HDMI+USB cables



This KVM switcher can save you money, space, devices, and power consumption. It can control multiple computers through a set of keyboards, mouse, and displays. The KVM multi computer switch has features such as hot key switching, panel buttons, and automatic scanning.

## Features:

- Maximum resolution supported up to 4K@60Hz.
- The USB2.0 Hub interface supports any USB2.0 device.
- LED indicator light that displays the current controlling PC.
- The 3.5mm independent audio port supports audio separation.
- 8 hosts share one monitor and a set of keyboard mouse.
- It can be switched through hotkeys, panel buttons, and remote control.
- Support OS: DOS, Win3X, Win98/ 98E/ 2000/ ME/ 2003/ 2008/ XP/ Vista, Win7, Win8, Win10, Win11, IOS, MAC, , Netware, Unix, Linux.
- Supports hot swapping, allowing the connected computer to be plugged in or unplugged, with no need to turn off the KVM switch and computer.
- Plug and play, no software need.
- Switch method: Panel button, hot-key, IR switch. And auto-scanning.

**Model** : ATZ KS18H2

**Description:** 8 ports HDMI2.0/USB2.0+Audio Rackmount KVM Switch  
4K@60Hz c/w 8x HDMI+USB cables

## Specifications:

Name	8 port HDMI KVM switch
Input interface	8x HDMI Female
	8x USB-B Female
	4x USB-A Female
	1x power Female
Output interface	1x HDMI Female
	1x 3.5mm audio interface
USB Protocol	USB1.1/USB2.0
Support resolution	3840*2160@60Hz
Bandwidth	18Gbps
HDMI version	HDMI2.0
Power	12V 1A
Dimension	L432*W167*H45 (mm)
Shell Material	Metal

## Keyboard Hotkey Switching:



The hotkey command operation needs to be completed within 3 secs. The hotkey command defaults to double clicking the Home+Define Function button. You can double-click Home+Caps according to your usage habits.

Scroll/Num sets different hotkey modes:

Double Click  Model (default)

Double Click  +  + Caps Enter the Caps model






























Double Click  +  + Scroll Enter the Scroll model

Double Click  +  + Num Enter the Num model

**Model** : ATZ KS18H2


**Description:** 8 ports HDMI2.0/USB2.0+Audio Rackmount KVM Switch  
4K@60Hz c/w 8x HDMI+USB cables

### HOME model Hotkey Switch Command

- Double Click  +  \  Switch according ports
- Double Click  +  or  Switch next port
- Double Click  +  or  Switch previous port
- Double Click  +  Turn on/off 'Bee' Sound
- Double Click  +  Auto Scan
- Double Click  +  + Num  -    +  Set scan time
- Double Click  +  +  + Num  /  /  /  /  /   
HDMI<sup>®</sup> Video EDID adjustment

Tips: Caps/Scroll/Num Model as the same.

### Remote Control:

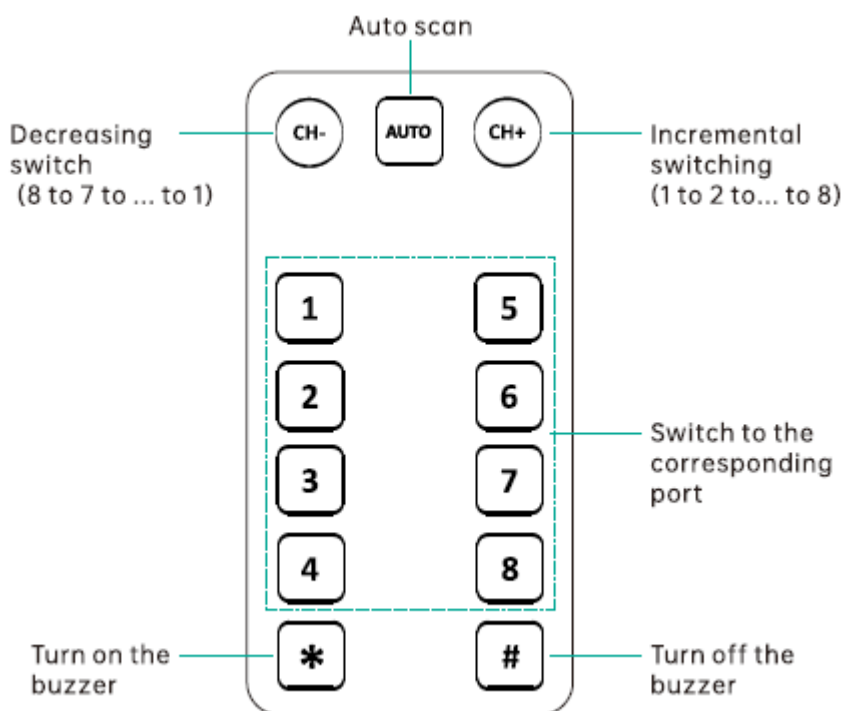


**Model** : ATZ KS18H2

**Description:** 8 ports HDMI2.0/USB2.0+Audio Rackmount KVM Switch  
4K@60Hz c/w 8x HDMI+USB cables

### Package Contents :

- 1x 8 port HDMI KVM switch
- 8x HDMI cable (2m)
- 8x USB-A to B cable (2m)
- 1x power adapter
- 1x IR remote
- 1x user manual
- 2x Ears

### Product Diagram:

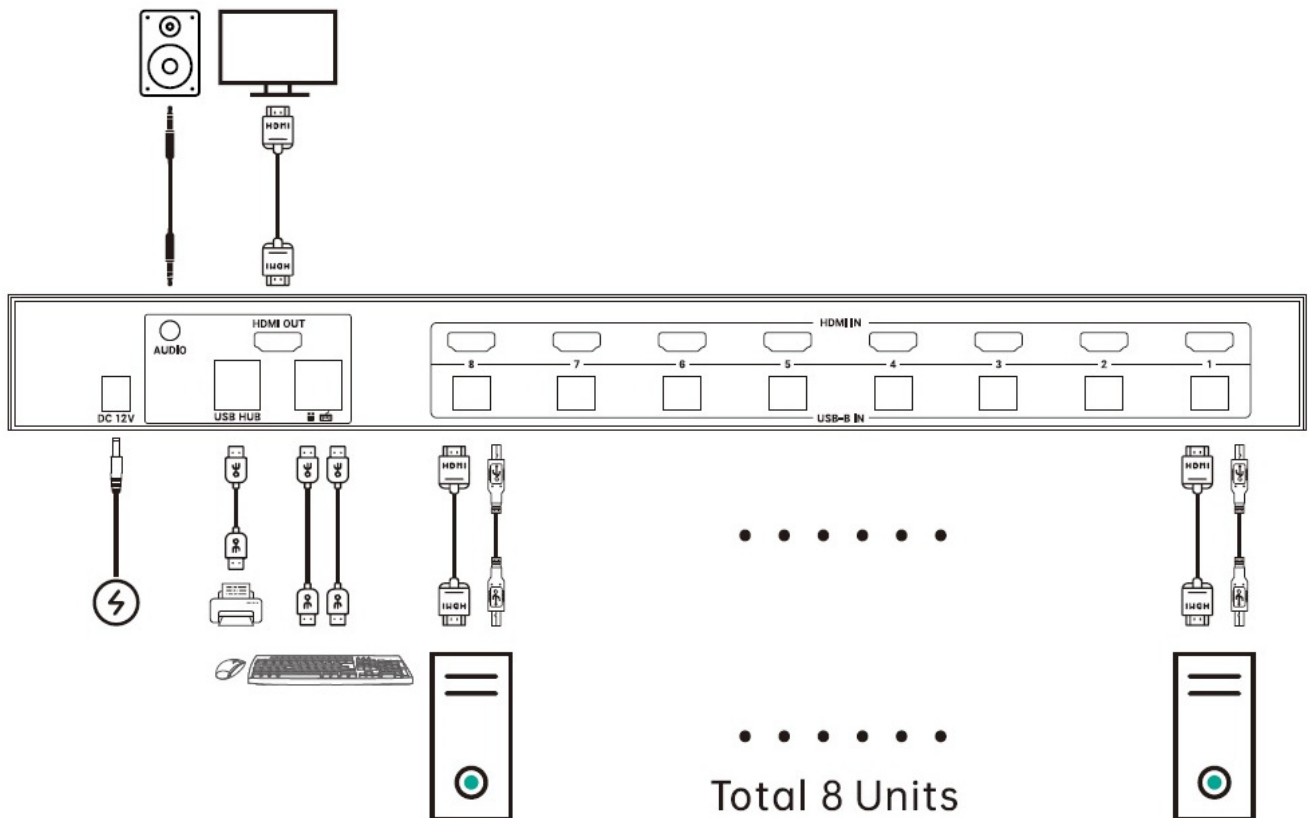

### Warranty: 3 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.



The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.