

Model : ATZ KSxx-TP
Description: CAT6 KVM Switch



CAT6 KVM Dongle-USB&VGA (ATZ LK-DGU)

Features:

- Capable of connecting 8/ 16/ 32 servers in 1U hardware space.
- Support interface VGA-USB.
- Up to 40 meters between server to KVM switch.
- USB local console, optional remote IP console.
- Cascade up to 8 levels, support mixed CAT6 & DB15 Combo KVM switch.
- Mixed USB/SUN & MAC with multi-platform switch Capability.
- Auto scan for monitoring PCs, easy select via push button, Hot keys and OSD.
- Hot pluggable, no software or driver required.
- Easy and quick installation.

Model : ATZ KSxx-TP
Description: CAT6 KVM Switch

ATZ KS18-TP



ATZ KS116-TP



ATZ KS132-TP




Specifications:

Part No.	ATZ KS18-TP	ATZ KS116-TP	ATZ KS132-TP
No. of Computers	8	16	32
Max. no. of Computers	232 (Daisy Chain)	240 (Daisy Chain)	256 (Daisy Chain)
KVM port connector	RJ 45		
Local Console	1x HD DB15 for VGA (up to 1920x1440 resolution) 2x USB Type A for KB / Mouse		
Daisy Chain	1x DB15 (Female), up to 8 levels		
Hot keys	Scroll-Lock, Caps-Lock, Num-Lock, Alt-Ctrl-Win		
Compatibility	Mix PCs, SUNs and MACs, support Win7/Vista/2003/XP, Linux, Unix		
Power	100-240V AC 50/60Hz external power adapter		
Environment	Operation temp.: 0 to 50°C Storage temp.: -20 to 60°C Humidity : 10% - 90%, non-condensing		
Physical Dimensions / Net Weights	448mm (W) x 167mm (D) x 44mm (H) / 3kg		
Packing Dimensions / Gross Weights	560*120*250mm / 3.5kg		
Related Item			
ATZ LK-DGU	CAT6 KVM Dongle - USB & VGA		
Optional Items			
ATZ LK-DGU-DVI-ADPTR	DVI-to-VGA changer		
ATZ LK-DGU-DP-ADPTR	DisplayPort-to-VGA changer		

Model : ATZ KSxx-TP
Description: CAT6 KVM Switch

ATZ LK-DGU-HDMI-ADPTR	HDMI-to-VGA changer
-----------------------	---------------------

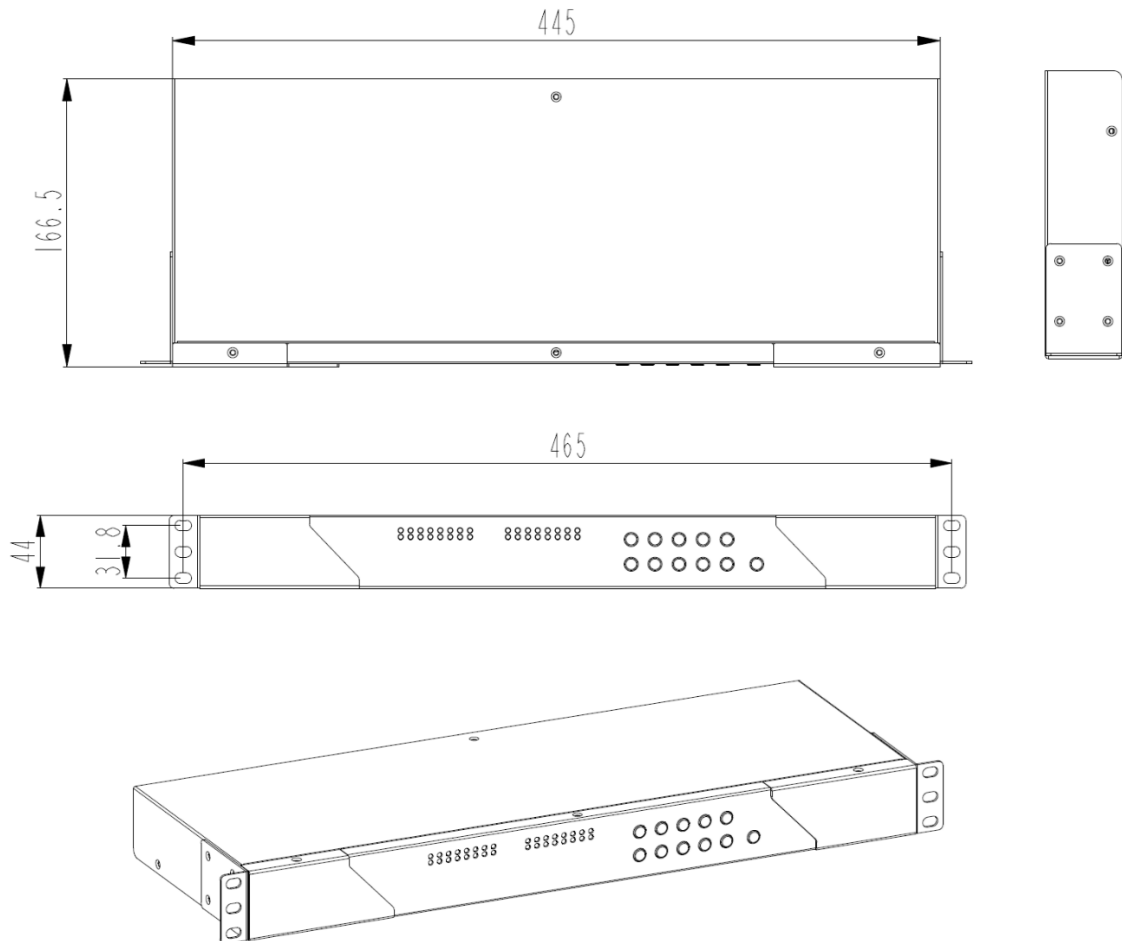


Package Includes:

1x CAT6 KVM
1x Power Adapter
1x Manual

Model : ATZ KSxx-TP
Description: CAT6 KVM Switch

Product Diagram:

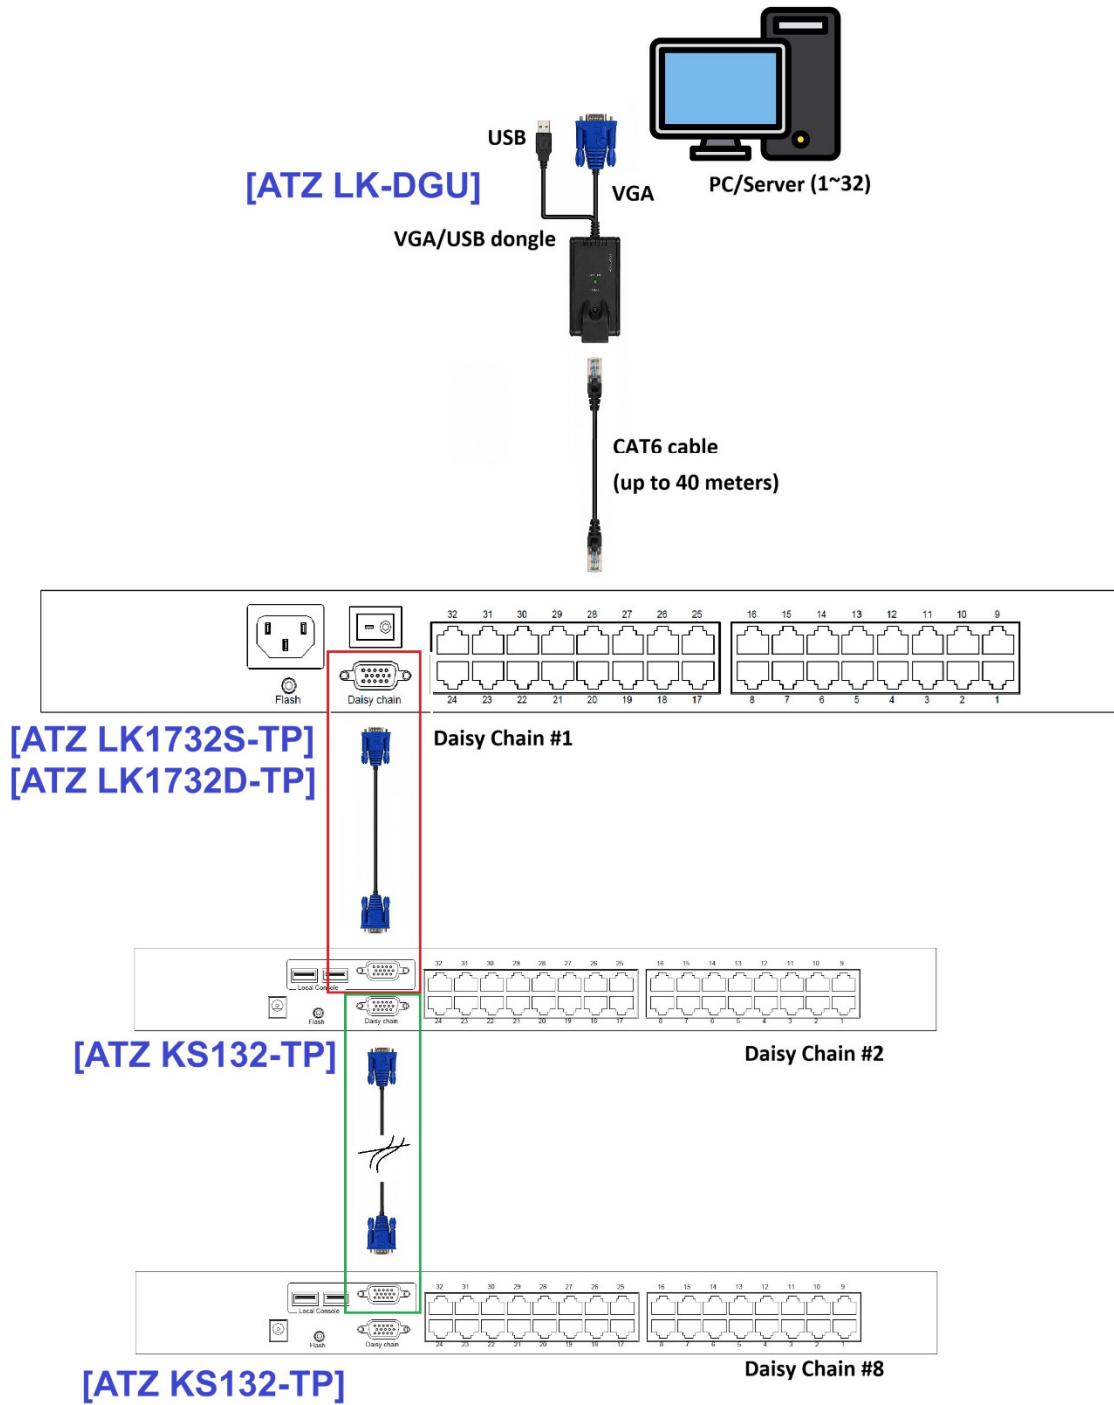

Model : ATZ KSxx-TP
Description: CAT6 KVM Switch

Warranty: 3 years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.