Model   **:** ATZ ST3.5-MM-xxM (xx=Length)
Description: Stereo 3.5mm Male to Male Audio Cable – (1.5M/2M/3M/5M/10M/15M/20M)

Features:

This ATZ 3.5mm Male to 3.5mm Male Stereo Audio Cable is constructed from high-quality, double-shielded pair style cable terminated with PVC molded male 3.5mm stereo Gold plated connectors on both ends. This cable is designed to provide quality sound transfer from your PC, Car stereos, headphone, Beats, iphone, iPod, iPad, Samsung Galaxy and other phone, tablets and MP3 players, portable speaker system or other 3.5mm-compatible output devices.

It is also well suited for use with serial or IR remote controllers that often use shielded-pair wire for transmission of transmit, receive, and ground signals.

The conductor is 99.99% pure oxygen-free 28-gauge stranded copper wire, protected in a strong PVC black outer jacket with completely-molded construction. Low signal loss, noise or interference (radio frequency or electromagnetic).
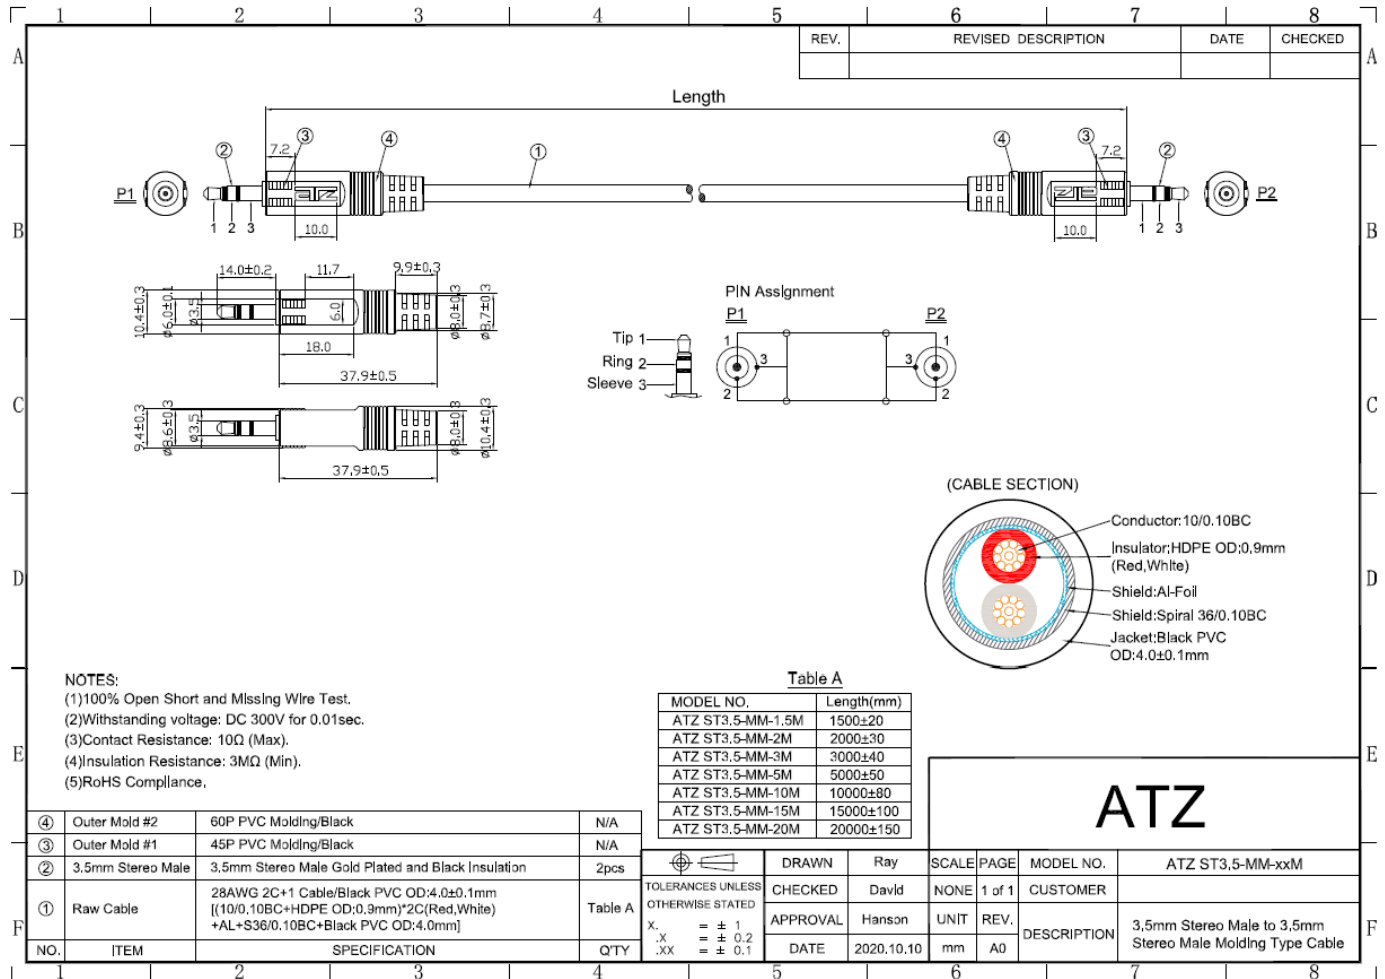The connectors on both ends are gold-plated to prevent any corrosion from developing.

Available in lengths: 1.5m/2m/3m/5m/10m/15m/20m

Model   : ATZ ST3.5-MM-xxM (xx=Length)
Description: Stereo 3.5mm Male to Male Audio Cable – (1.5M/2M/3M/5M/10M/15M/20M)

Specifications:

Table A

MODEL NO.	Length(mm)
ATZ ST3.5-MM-1.5M	1500±20
ATZ ST3.5-MM-2M	2000±30
ATZ ST3.5-MM-3M	3000±40
ATZ ST3.5-MM-5M	5000±50
ATZ ST3.5-MM-10M	10000±80
ATZ ST3.5-MM-15M	15000±100
ATZ ST3.5-MM-20M	20000±150

NOTES:
(1)100% Open Short and Missing Wire Test.
(2)Withstanding voltage: DC 300V for 0.01sec.
(3)Contact Resistance: 10Ω (Max).
(4)Insulation Resistance: 3MΩ (Min).
(5)RoHS Compliance.

(CABLE SECTION)
Conductor:10/0.10BC
Insulator;HDPE OD;0,9mm (Red,White)
Shield:Al-Foil
Shield:Spiral 36/0.10BC
Jacket:Black PVC OD:4.0±0.1mm

NO.	ITEM	SPECIFICATION	Q'TY
④	Outer Mold #2	60P PVC Molding/Black	N/A
③	Outer Mold #1	45P PVC Molding/Black	N/A
②	3.5mm Stereo Male	3.5mm Stereo Male Gold Plated and Black Insulation	2pcs
①	Raw Cable	28AWG 2C+1 Cable/Black PVC OD:4.0±0.1mm [(10/0.10BC+HDPE OD;0.9mm)*2C(Red,White) +AL+S36/0.10BC+Black PVC OD:4.0mm]	Table A

TOLERANCES UNLESS OTHERWISE STATED
X.   = ± 1
.X   = ± 0.2
.XX   = ± 0.1

DRAWN	Ray	SCALE NONE
CHECKED	David	PAGE 1 of 1
APPROVAL	Hanson	UNIT mm
DATE	2020.10.10	REV. A0

MODEL NO. ATZ ST3.5-MM-xxM
CUSTOMER
DESCRIPTION 3.5mm Stereo Male to 3.5mm Stereo Male Molding Type Cable

ATZ

Warranty: 3 Years
Warranty is effective from the date of original delivery.
This warranty shall be void if a serial number has been removed from the product.