

Description: 8U 19" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -



#### **Features:**

- Compact 19 inch rack mountable with 8U height
- 19 inch LCD panel, support 1280 x 1024 resolution
- DVI-D, VGA, Audio input
- 90° tilt adjustment while mounted in rack: 45° ~-45° ( V )
- Heavy duty steel chassis with hardness glass protect screen
- Front osd control buttons to optimized display



Description: 8U 19" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -

• Build in 2x 2watts stereo speakers

#### **Option:**

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

# **Specifications:**

User Controls Interface:		
Power ON / OFF via Front Button		
Power Mode Status LED indicator		
OSD ( On Screen Display ) Buttons		
LCD Characteristics:		
Screen Size	19 inch widescreen	
Backlight Type	LED	
Resolution	1280x1024	
Contrast Ratio	1000:1	
Brightness ( cd/m2 )	350	
View Angles ( H/V )	170/160	
Pixel Size ( HxV ) mm	0.294x0.294	
Max. Color	16.7M	
MTBF ( Hrs. )	50,000	
Mechanical and Environment:		
Height	8U	
IP Protect	N/A	
Mounting	VESA Mount and Rack Mount	
Construction	Metal Housing	
Operating Temperature	0 - 50 deg. C	
Operating Humidity	5% - 95% ( non -condensing )	



**Description:** 8U 19" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -


<u></u>	
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension (WxHxD)	483 x 355 x 60 (mm)
Packing Dimension (WxHxD)	620 x 480 x 210 (mm)
Net Weight / Gross Weight	10 / 12.5 (KGs)
Certification and Approvals	CE / FCC / RoHs
Input Signals:	
DVI-D	DVI-D 24Pin Connector (Female)
VGA	D-SUB 15Pin Connector (Female)
Audio	3.5mm Jack
Power Input	Standard IEC Inlet
Composite BNC (option)	BNC connector (Female)
Composite AV (option)	3.5mm Jack (for 1-in-3-out RCA adapter cable)
HDMI (option)	HDMI Type-A connector
Touch-USB ( option )	USB A Type connector
Touch-RS232 ( option )	D-SUB 9P connector ( Female )
Power Specifications :	
AC Power Input	Standard IEC Type Power Cord with Internal Power
	adapter, 100-240V AC Input
Wide Range DC Power Input	Screw Type Terminal Block with internal
( option )	wide Range DC 9-36V power module




Description: 8U 19" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -

# **Product Diagram:**

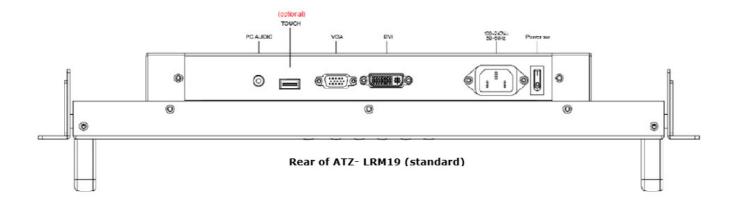


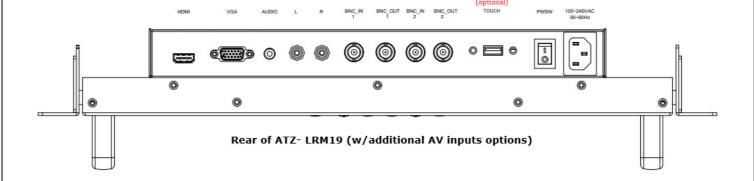



Description: 8U 19" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -

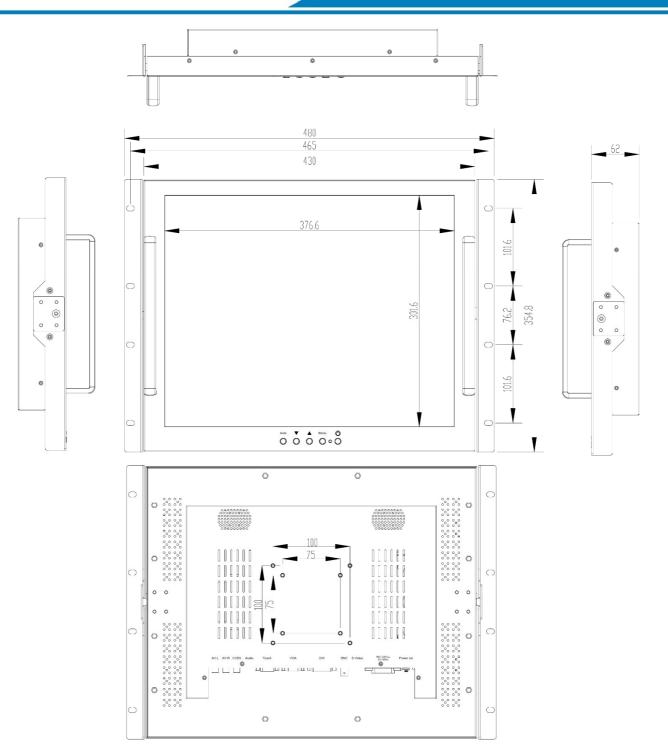

pg. 5

Notes: - All brand names and trademarks are properties of their respective holders and are referred to here for descriptive purpose only. Photo attached is for reference only, it may be slightly varied in items of colour, shape from the actual item delivered from time to time.

All specifications are subject to change without prior notice.
© Copyright



**Description:** 8U 19" LCD Rackmount Industrial Monitor

- Optimize rack space. Maximize rack monitoring -

### **Warranty: 3 Years**

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.