


Description: CAT.7 S/FTP LSZH NETWORK PATCHCORD - ROUND Stranded 26AWG

7/0.16 BC 600MHz OD: 6.0mm (0.5m_to_100m) - BLACK/BLUE/GREY



Cat 7 network patch cable is the ideal solution for indoor data center applications, supporting up to 10GBase-T and 600MHz up to 100m distance. It supports backward compatibility to Cat5E/6/6A. ATZ Cat 7 patchcords uses Pure Bare Copper that ensures high electrical conductivity and low signal transmission attenuation. The jacket material is LSZH which means 'Low Smoke Zero Halogen'. When the cable ignites or when the cable comes in contact with high temperatures, such as fire, a cable with LSZH will produce less smoke and there is no release of hazardous gas, due to the presence of thermoplastic.

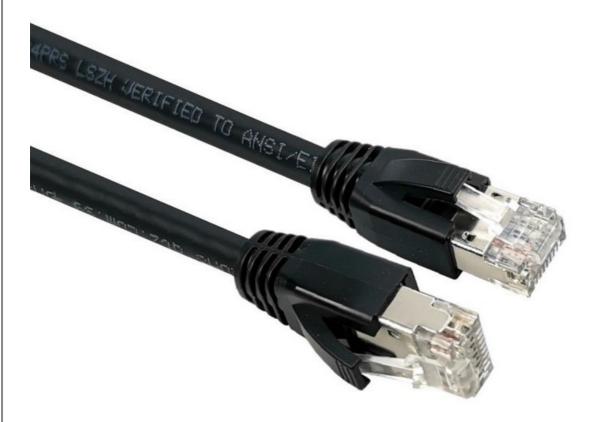

Description: CAT.7 S/FTP LSZH NETWORK PATCHCORD - ROUND Stranded 26AWG

7/0.16 BC 600MHz OD: 6.0mm (0.5m_to_100m) - BLACK/BLUE/GREY

Features:

- Category 7 bulk cable assembly with overall braid shield around individually foil shielded twisted pairs (S/FTP)
- IEC 60332-1, 60754 & 61034 verified LSZH (low smoke zero halogen) jacket in black
- 26AWG Stranded conductors for flexibility
- Compatible to 10Gbps Category 7 applications
- High bandwidth up to 600 MHz guarantees high-speed data transmission for cloud storage and support networks of 10/100/1000Mbps/10 Gbps, It can provide higher-speed, stable data transfer for Cloud storage, online gaming, Video conferencing, Livestreaming.
- Additional shielding and improved quality in twisting of the wires that provides better prevention from crosstalk, noise, and interference
- High speed solution for connecting LAN networking equipment such as PCs, computer servers, printers, routers, switch boxes, network media players, NAS, VoIP phones, POE devices, and more.

Specifications:

Cable type	S/FTP (overall braided shield over pair-in-metal-foil)
Cable construction	4 Twisted Pairs
Jacket Material	LSZH (low smoke zero halogen)
Jacket Colour	Black/Blue/Grey
Length	0.5m to 100m
Conductor	Stranded Pure Bare Copper
Connector	RJ45 shielded crystal head w/50µ" gold contacts
Data Speed	10GBase-T
Frequency	600MHz
Gauge (AWG)	26 (7/0.16mm)
Cable Outer Diameter (mm)	6.0 ± 0.3
Max Transmission Distance	100m
Wire Scheme	T568B, Straight
Standards	ISO, IEC, UL, TIA, ANSI, RoHS
Operating Temperature	-20 to +80°C (-4 to 167°F)
Installation Temperature	-10 to +50°C (14 to 122°F)



Description: CAT.7 S/FTP LSZH NETWORK PATCHCORD - ROUND Stranded 26AWG

7/0.16 BC 600MHz OD: 6.0mm (0.5m_to_100m) - BLACK/BLUE/GREY

Universal Compatibility

Compatible with RJ45 port, suitable for RJ45 interface computer, network set-top box, switch, router, ADSL MODEM and so on.


















Description: CAT.7 S/FTP LSZH NETWORK PATCHCORD - ROUND Stranded 26AWG

7/0.16 BC 600MHz OD: 6.0mm (0.5m_to_100m) - BLACK/BLUE/GREY

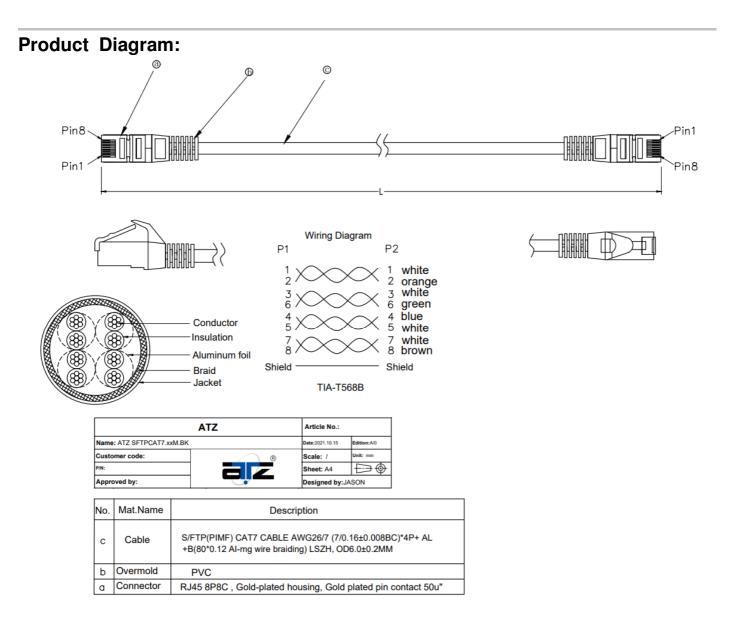

Warranty: 3 Years

Warranty is effective from the date of original delivery.

This warranty shall be void if a serial number has been removed from the product.